

The package `nicematrix`*

F. Pantigny
fpantigny@wanadoo.fr

March 11, 2026

Abstract

The LaTeX package `nicematrix` provides new environments similar to the classical environments `{tabular}`, `{array}` and `{matrix}` of `array` and `amsmath` but with extended features.

$$\begin{array}{c} L_1 \\ L_2 \\ \vdots \\ L_n \end{array} \begin{array}{c} C_1 \\ C_2 \cdots \cdots C_n \end{array} \begin{bmatrix} a_{11} & a_{12} & \cdots & a_{1n} \\ a_{21} & a_{22} & \cdots & a_{2n} \\ \vdots & \vdots & \ddots & \vdots \\ a_{n1} & a_{n2} & \cdots & a_{nn} \end{bmatrix}$$

Product	dimensions (cm)			Price
	L	l	h	
small	3	5.5	1	30
standard	5.5	8	1.5	50.5
premium	8.5	10.5	2	80
extra	8.5	10	1.5	85.5
special	12	12	0.5	70

The package `nicematrix` is entirely contained in the file `nicematrix.sty`. This file may be put in the current directory or in a `texmf` tree. However, the best is to install `nicematrix` with a TeX distribution such as MiKTeX, TeX Live or MacTeX.

Remark

If you use LaTeX via Internet with, for example, Overleaf or TeXPage, you can upload the file `nicematrix.sty` in the repertory of your project in order to take full advantage of the latest version de `nicematrix`.¹

This package can be used with `xelatex`, `lualatex`, `pdflatex` but also by the classical workflow `latex-dvips-ps2pdf` (or Adobe Distiller). However, the file `nicematrix.dtx` of the present documentation should be compiled with `LuaLaTeX`.

This package requires and **loads** the packages `array`, `amsmath`, `pgfcore` and the module `shapes` of PGF (`tikz`, which is a layer over PGF, is *not* loaded). The final user only has to load the package with `\usepackage{nicematrix}`.

The idea of `nicematrix` is to create PGF nodes under the cells and the positions of the rules of the tabular created by `array` and to use these nodes to develop new features. As usual with PGF, the coordinates of these nodes are written in the `aux` file to be used on the next compilation and that's why `nicematrix` may need **several compilations**². One must not use the command `\nofiles` (which prevents the creation of the `aux` file).

Most features of `nicematrix` may be used without explicit use of PGF or TikZ (which, in fact, is not loaded by default).

A command `\NiceMatrixOptions` is provided to fix the options (the scope of the options fixed by this command is the current TeX group: they are semi-global).

*This document corresponds to the version 7.8 of `nicematrix`, at the date of 2026/03/11.

¹The latest version of the file `nicematrix.sty` may be downloaded on the GitHub depot of `nicematrix`: <https://github.com/fpantigny/nicematrix/releases>

²If you use Overleaf, Overleaf will do automatically a sufficient number of compilations (by using `latexmk`).

1 The environments of this package

The package `nicematrix` defines the following new environments.

<code>{NiceTabular}</code>	<code>{NiceArray}</code>	<code>{NiceMatrix}</code>	<code>{NiceArrayWithDelims}</code>
<code>{NiceTabular*}</code>	<code>{pNiceArray}</code>	<code>{pNiceMatrix}</code>	
<code>{NiceTabularX}</code>	<code>{bNiceArray}</code>	<code>{bNiceMatrix}</code>	
	<code>{BNiceArray}</code>	<code>{BNiceMatrix}</code>	
	<code>{vNiceArray}</code>	<code>{vNiceMatrix}</code>	
	<code>{VNiceArray}</code>	<code>{VNiceMatrix}</code>	

The environments `{NiceArray}`, `{NiceTabular}` and `{NiceTabular*}` are similar to the environments `{array}`, `{tabular}` and `{tabular*}` of the package `array` (which is loaded by `nicematrix`).

The environments `{pNiceArray}`, `{bNiceArray}`, etc. have no equivalent in `array`.

The environments `{NiceMatrix}`, `{pNiceMatrix}`, etc. are similar to the corresponding environments of `amsmath` (which is loaded by `nicematrix`): `{matrix}`, `{pmatrix}`, etc.

The environment `{NiceTabularX}` is similar to the environment `{tabularx}` from the eponymous package.³

The environment `\{NiceArrayWithDelims\}` is a generalisation of the environment `{NiceArray}` and its variants (cf. p. 56).

It's recommended to use primarily the classical environments and to use the environments of `nicematrix` only when some feature provided by these environments is used (this will save memory and speed up the compilation).⁴

All the environments of the package `nicematrix` accept, between square brackets, an optional list of `key=value` pairs. **There must be no space before the opening bracket (`[`) of this list of options.**

2 The vertical space between the rows

It's well known that some rows of the arrays created by default with LaTeX are, by default, too close to each other. Here is a classical example.

```
\begin{pmatrix}
\frac{1}{2} & -\frac{1}{2} \\
\frac{1}{3} & \frac{1}{4}
\end{pmatrix}
```



Inspired by the package `cellspace` which deals with that problem, the package `nicematrix` provides two keys `cell-space-top-limit`⁺ and `cell-space-bottom-limit`⁺ similar to the parameters of `cellspace` called `\cellspacetoplimit` and `\cellspacebottomlimit`.⁵

The initial values of these parameters is 0 pt.

There is also a key `cell-space-limits`⁺ to set both parameters at once.

All these keys have a normal syntax but also an “additive” syntax. That means that it's possible to write, for example, `cell-space-limits = 2pt` but also `cell-space-limits += 1pt`.

³In fact, it's possible to use directly the X columns in the environment `{NiceTabular}` (and the required width for the tabular is fixed by the key `width`): cf. p. 29

⁴In order to speed up the compilations, it's also possible to use punctually the key `no-cell-nodes` which disables the creation of the PGF/TikZ nodes for the contents of the cells but some functionalities won't work any longer (cf. p. 57).

⁵One should remark that these parameters apply also to the columns of type `S` of `siunitx` whereas the package `cellspace` is not able to act on such columns of type `S`.

```


$$\begin{pmatrix} \frac{1}{2} & -\frac{1}{2} \\ \frac{1}{3} & \frac{1}{4} \end{pmatrix}$$


```



It's also possible to change these parameters for only a few rows by using the command `\RowStyle` provided by `nicematrix` (cf. p. 27).

3 The vertical position of the arrays

The package `nicematrix` provides a option `baseline` for the vertical position of the arrays. This option takes in as value an integer which is the number of the row on which the array will be aligned.

```


$$A = \begin{pmatrix} \frac{1}{\sqrt{1+p^2}} & p & 1-p \\ 1 & 1 & 1 \\ 1 & p & 1+p \end{pmatrix}$$


```



It's also possible to use the option `baseline` with one of the special values `t`, `c` or `b`. These letters may also be used absolutely like the option of the environments `{tabular}` and `{array}` of `array`. The initial value of `baseline` is `c`.

In the following example, we use the option `t` (equivalent to `baseline=t`) immediately after an `\item` of list. One should remark that the presence of a `\hline` at the beginning of the array doesn't prevent the alignment of the baseline with the baseline of the first row (with `{tabular}` or `{array}` of `array`, one must use `\firsthline`).

```

1. an item

$$\begin{array}{cccccc} n & 0 & 1 & 2 & 3 & 4 & 5 \\ u_n & 1 & 2 & 4 & 8 & 16 & 32 \end{array}$$


```



However, it's also possible to use the tools of `booktabs`⁶: `\toprule`, `\bottomrule`, `\midrule`, etc.

```

1. an item

$$\begin{array}{cccccc} n & 0 & 1 & 2 & 3 & 4 & 5 \\ u_n & 1 & 2 & 4 & 8 & 16 & 32 \end{array}$$


```



⁶The extension `booktabs` is *not* loaded by `nicematrix`.

It's also possible to use the key `baseline` to align a matrix on an horizontal rule (drawn by `\hline`). In this aim, one should give the value `line-i` where i is the number of the row *following* the horizontal rule.

```
\NiceMatrixOptions{cell-space-limits=1pt}
```

```
$A=\begin{pNiceArray}{cc|cc}[baseline=line-3]
\frac{1}{A} & \frac{1}{B} & 0 & 0 \\
\frac{1}{C} & \frac{1}{D} & 0 & 0 \\
\hline
0 & 0 & A & B \\
0 & 0 & D & D \\
\end{pNiceArray}$
```

$$A = \left(\begin{array}{cc|cc} \frac{1}{A} & \frac{1}{B} & 0 & 0 \\ \frac{1}{C} & \frac{1}{D} & 0 & 0 \\ \hline 0 & 0 & A & B \\ 0 & 0 & D & D \end{array} \right)$$



4 The blocks

4.1 General case

In the environments of `nicematrix`, it's possible to use the command `\Block` in order to place an element in the center of a rectangle of merged cells of the array.⁷

The command `\Block` must be used in the upper leftmost cell of the cells of the block with two mandatory arguments.

- The first argument is the size of the block with the syntax $i-j$ where i is the number of rows of the block and j its number of columns.

If this argument is empty, its default value is `1-1`. If the number of rows is not specified, or equal to `*`, the block extends until the last row (idem for the columns).

- The second argument is the content of the block. In `{NiceTabular}`, `{NiceTabular*}` and `{NiceTabularX}`, the content of the block is composed in text mode whereas, in the other environments, it is composed in math mode.

Due to technical reasons of LaTeX, it's not possible to use `\color` at the beginning of the content of the block (but it's possible to use `\textcolor`).⁸

Here is an example of utilisation of the command `\Block` in mathematical matrices.

```
$$\begin{bNiceArray}{cw{c}{1cm}c|c}[margin]
\Block{3-3}{A} & & 0 \\
& & \Vdots \\
& & 0 \\
\hline
0 & \Cdots & 0 & 0 \\
\end{bNiceArray}$$
```

$$\left[\begin{array}{c|c} A & \begin{array}{c} 0 \\ \vdots \\ 0 \end{array} \\ \hline 0 \dots \dots \dots 0 & 0 \end{array} \right]$$



One may wish to raise the size of the “A” placed in the block of the previous example. Since this element is composed in math mode, it's not possible to use directly a command like `\large`, `\Large` and `\LARGE`. That's why the command `\Block` provides an option between angle brackets to specify some TeX code which will be inserted before the beginning of the math mode.⁹

⁷The spaces after a command `\Block` are deleted.

⁸cf. <https://tex.stackexchange.com/questions/674788>

⁹This argument between angular brackets may also be used to insert a command of font such as `\bfseries` when the command `\` is used in the content of the block. It's also possible to put in that optional argument the command `\rotate` provided by `nicematrix` (cf. part 14.6, p. 54).

```


$$\begin{array}{c|c} \text{A} & \begin{array}{c} 0 \\ \vdots \\ 0 \end{array} \\ \hline 0 & \dots & 0 & 0 \end{array}$$


```

$$\left[\begin{array}{c|c} \text{A} & \begin{array}{c} 0 \\ \vdots \\ 0 \end{array} \\ \hline 0 & \dots & 0 & 0 \end{array} \right]$$



In fact, the command `\Block` accepts as first optional argument (between square brackets) a list of pairs `key=value`.

First, there are keys which are quick tools to control the appearance of the block.

- the key `fill` takes in as value a color and fills the block with that color;
- the key `opacity` sets the opacity of the filling color specified by `fill`;¹⁰
- the key `draw` strokes the frame of the block with the current color for the rules (however, it's possible to use another color by providing it as value of the key `draw`);
- the keys `hlines`, `vlines` and `hvlines` draw all the corresponding rules in the block;¹¹
- the key `rules/width` is the width of the rules (is relevant only when one of the keys `draw`, `hvlines`, `vlines` and `hlines` is used);
- the key `rounded-corners` requires rounded corners (for the frame drawn by `draw` and the shape drawn by `fill`) with a radius equal to the value of that key (the default value is 4 pt¹²);
- the key `color` has a behaviour which is a bit strange for historical reasons: it takes in as argument a color and applies it to the content of the block and also draws the frame of the block with that color (we don't recommend to use it).

Sometimes, these tools are not sufficient to control the appearance of the block. The following keys are more powerful but also more difficult to use. Moreover, they require the loading of TikZ by the user (with `\usepackage{tikz}`). By default, `nicematrix` does not load TikZ but only PGF, which is a sublayer of TikZ.

- The key `borders` provides the ability to draw only some borders of the blocks; the value of that key is a (comma-separated) list of elements covered by `left`, `right`, `top` and `bottom`; it's possible, in fact, in the list which is the value of the key `borders`, to add an entry of the form `tikz={list}` where `list` is a list of couples `key=value` of TikZ specifying the graphical characteristics of the lines that will be drawn (for an example, see p. 69).
- When the key `tikz` is used, the TikZ path corresponding of the rectangle which delimits the block is executed with TikZ¹³ by using as options the value of that key `tikz` (which must be a list of keys allowed for a TikZ path).

In fact, in the list of the keys provided by the user as value of `tikz`, it's possible to put a key `offset`. That key is not provided by TikZ but by `nicematrix`. It will narrow the rectangular frame corresponding to the block by a margin (horizontally and vertically) equal to the value (of that key `offset`). That new frame, a bit narrower, will be executed by TikZ with options which are the other keys in the list of keys provided as value to the key `tikz` of `\Block`.

For examples, cf. p. 67.

There is also some technical keys:

¹⁰Caution: that feature creates instructions of transparency in the PDF and some readers of PDF don't support such instructions. The opacity is applied by using `\pgfsetfillopacity`.

¹¹However, the rules are not drawn in the sub-blocks of the block, as always with `nicematrix`: the rules are not drawn in the blocks, except when they have the key `transparent` (cf. section 5 p. 11).

¹²This value is the initial value of the `rounded corners` of TikZ.

¹³TikZ should be loaded (by default, `nicematrix` only loads PGF) and, if it's not, an error will be raised.

- the key `name` provides a name to the rectangular TikZ node corresponding to the block; it's possible to use that name with TikZ in the `\CodeAfter` of the environment (cf. p. 40);
- the key `respect-arraystretch` prevents the setting of `\arraystretch` to 1 at the beginning of the block (which is the behaviour by default) ;
- By default, the rules are not drawn in the blocks (see the section about the rules: section 5 p. 11). However, if the key `transparent` is used, the rules are drawn. For an example, see section 18.2 on page 67. Caution: that key does not imply that the content of the block will be transparent!

There is also keys for the horizontal and vertical positions of the content of the block: cf. 4.5 p. 7.

One must remark that, by default, the commands `\Blocks` don't create space. There is exception only for the blocks `mono-column` and the blocks `mono-row` under some conditions as explained just below.

In the following example, we have had to enlarge by hand the columns 2 and 3 (with the construction `w{c}{...}` of `array`).

```
\begin{NiceTabular}{cw{c}{2cm}w{c}{3cm}c}
rose & tulip & daisy & dahlia \\
violet
  & \Block[C,draw=red,fill=[RGB]{204,204,255},rounded-corners]{2-2}
  & {\LARGE Some beautiful flowers} & & marigold \\
  & & marigold \\
iris & & & lis \\
arum & periwinkle & forget-me-not & hyacinth
\end{NiceTabular}
```



rose	tulip	daisy	dahlia
violet	Some beautiful flowers		marigold
iris			lis
arum	periwinkle	forget-me-not	hyacinth

4.2 The mono-column blocks

The mono-column blocks have a special behaviour.

- The natural width of the contents of these blocks is taken into account for the width of the current column.

In the columns with a fixed width (columns `w{...}{...}`, `W{...}{...}`, `p{...}`, `b{...}`, `m{...}`, `V` and `X`), the content of the block is formatted as a paragraph of that width.

- The specification of the horizontal position provided by the type of column (`c`, `r` or `l`) is taken into account for the blocks. For a block in a column of type `p{...}`, `b{...}`, `m{...}`, `V{...}` ou `X`, the alignment `c` will be used by default. However, those types of columns may have an optional argument for the horizontal alignment (eg: `p[1]{...}`) and, in that case, that type of alignment is passed to the block.

Of course, the `\Block` may also have its own specification of alignment: cf. 4.5 p. 7.

- The specifications of font specified for the column by a construction `>{...}` in the preamble of the array are taken into account for the mono-column blocks of that column (this behaviour is probably expected).

```

\begin{NiceTabular}{@{>{\bfseries}lr@{}} \hline
\Block{2-1}{John} & 12 \\
& 13 \\ \hline
Steph & 8 \\ \hline
\Block{3-1}{Sarah} & 18 \\
& 17 \\
& 15 \\ \hline
Ashley & 20 \\ \hline
Henry & 14 \\ \hline
\Block{2-1}{Madison} & 15 \\
& 19 \\ \hline
\end{NiceTabular}

```

John	12
	13
Steph	8
	18
Sarah	17
	15
Ashley	20
Henry	14
	15
Madison	19



4.3 The mono-row blocks

For the mono-row blocks, the natural height and depth are taken into account for the height and depth of the current row (as does a standard `\multicolumn` of LaTeX), except when an option of vertical position has been used for the block (one of the keys `t`, `b`, `m`, `T` and `B` described in the part 4.6, p. 9).

4.4 The mono-cell blocks

A mono-cell block inherits all the properties of the mono-row blocks and mono-column blocks.

At first sight, one may think that there is no point using a mono-cell block. However, there are some good reasons to use such a block.

- It's possible to use the command `\\` in a (mono-cell) block.
- It's possible to split the cell in several sub-cells with `&` when the key `&-in-blocks` is in force (cf p. 10).
- It's possible to use the option of horizontal alignment of the block in derogation of the type of column given in the preamble of the array.
- It's possible to draw a frame around the cell with the key `draw` of the command `\Block` and to fill the background with rounded corners with the keys `fill` and `rounded-corners`.¹⁴
- It's possible to draw one or several borders of the cell with the key `borders`.

4.5 Horizontal position of the content of the block

The command `\Block` accepts the keys `l`, `c` and `r` for the horizontal position of its content.

```

$\begin{bNiceArray}{cw{c}{1cm}c|c}[margin]
\Block[r]{3-3}<\LARGE>{A} & & & 0 \\
& & & \Vdots \\
& & & 0 \\ \hline
0 & \Cdots & 0 & 0
\end{bNiceArray}$

```

$$\left[\begin{array}{ccc|c} & & & 0 \\ & & & \vdots \\ & & & 0 \\ \hline 0 & \dots & 0 & 0 \end{array} \right]$$



By default, the horizontal position of the content of a block is computed by using the positions of the *contents* of the columns implied in that block. That's why, in the following example, the header "First group" is correctly centered despite the instruction `!\qqquad` in the preamble which has been used to increase the space between the columns (this is not the behaviour of `\multicolumn`).

¹⁴If one simply wishes to color the background of a unique cell, there is no point using the command `\Block`: it's possible to use the command `\cellcolor`.

```

\begin{NiceTabular}{@{}c!{\quad}ccc!{\quad}ccc@{}}
\toprule
Rank & \Block{1-3}{First group} & & & \Block{1-3}{Second group} & \\\
& 1A & 1B & 1C & 2A & 2B & 2C & \\\
\midrule
1 & 0.657 & 0.913 & 0.733 & 0.830 & 0.387 & 0.893\\
2 & 0.343 & 0.537 & 0.655 & 0.690 & 0.471 & 0.333\\
3 & 0.783 & 0.885 & 0.015 & 0.306 & 0.643 & 0.263\\
4 & 0.161 & 0.708 & 0.386 & 0.257 & 0.074 & 0.336\\
\bottomrule
\end{NiceTabular}

```



Rank	First group			Second group		
	1A	1B	1C	2A	2B	2C
1	0.657	0.913	0.733	0.830	0.387	0.893
2	0.343	0.537	0.655	0.690	0.471	0.333
3	0.783	0.885	0.015	0.306	0.643	0.263
4	0.161	0.708	0.386	0.257	0.074	0.336

In order to have an horizontal positioning of the content of the block computed with the limits of the columns of the LaTeX array (and not with the contents of those columns), one may use the key `L`, `R` and `C` of the command `\Block`.¹⁵

Here is the same example with the key `C` for the first block.

```

\begin{NiceTabular}{@{}c!{\quad}ccc!{\quad}ccc@{}}
\toprule
Rank & \Block[C]{1-3}{First group} & & & \Block{1-3}{Second group} & \\\
& 1A & 1B & 1C & 2A & 2B & 2C & \\\
\midrule
1 & 0.657 & 0.913 & 0.733 & 0.830 & 0.387 & 0.893\\
2 & 0.343 & 0.537 & 0.655 & 0.690 & 0.471 & 0.333\\
3 & 0.783 & 0.885 & 0.015 & 0.306 & 0.643 & 0.263\\
4 & 0.161 & 0.708 & 0.386 & 0.257 & 0.074 & 0.336\\
\bottomrule
\end{NiceTabular}

```



Rank	First group			Second group		
	1A	1B	1C	2A	2B	2C
1	0.657	0.913	0.733	0.830	0.387	0.893
2	0.343	0.537	0.655	0.690	0.471	0.333
3	0.783	0.885	0.015	0.306	0.643	0.263
4	0.161	0.708	0.386	0.257	0.074	0.336

The command `\Block` supports also the keys `p` and `j`. With the key `p`, the content of the block is formatted like a paragraph (as in a column of type `p`). That key may be used in conjunction with a key `l`, `c` or `r`, and, in that case, the paragraph is formatted with `\raggedright`, `\centering` or `\raggedleft` (or `\RaggedRight`, `\Centering` and `\RaggedLeft` when `ragged2e`) est chargée. With the key `j` (which inforces the key `p`), the paragraph is justified.

¹⁵Remark: The keys `L`, `C` and `R` require less computations than the keys `l`, `c` and `r`. If you are concernend about efficiency, you should use by default `\Block[C]`.

It's possible to put an environment `{itemize}` or `{enumerate}` in a block which uses the key `p` or `j` (in the other case, you will have a LaTeX error: `Not allowed in LR mode`). For the following example, we have loaded the package `enumitem` (for the key `left` of the environment `{itemize}`).

```
\begin{NiceTabular}[hvlines]{ccc}
one & two two & three three \\
one & & \\
\Block[p]{*-2}{%
\begin{itemize}[left=0pt]
\item one two three four five
\item two
\item three
\end{itemize}
} \\
one & \\
\end{NiceTabular}
```



one	two two	three three
one		
one	• one two three four	
one	five	
one	• two	
one	• three	
one		

4.6 Vertical position of the content of the block

For the vertical position, the command `\Blocks` accepts the keys `m`, `t`, `b`, `T` and `B`.

- With the key `m`¹⁶, the content of the block is vertically centered.
- With the key `t`, the baseline of the content of the block is aligned with the baseline of the first row concerned by the block.
- with the key `b`, the baseline of the last row of the content of the block (we recall that the content of a block may contain several lines of text separated by `\\`) is aligned with the baseline of the last of the rows of the array involved in the block.
- With the key `T`, the content of the block is set upwards.
No vertical margin is added. However, the contents of the block is (always) composed by `nicematrix` in a `{minipage}`, a `{tabular}` or an `{array}` and, hence, there will still remain a margin (in most cases). If needed, it's always possible to add a `\strut...`
- With the key `B`, the content of the block is set downwards.

When no key is given, the key `m` applies (except in the mono-row blocks).

```
\NiceMatrixOptions{rules/color=[gray]{0.75}, hvlines}
```

¹⁶That key has an alias: `v-center`.

```

\begin{NiceTabular}{ccc}
\Block[fill=red!10,t,l]{4-2}{two\\lines}
& & \Huge Un\\
& & deux \\
& & trois \\
& & \Huge quatre \\
text & text & \\
\end{NiceTabular}

```

two lines	Un	
	deux	
	trois	
	quatre	
text	text	



```

\begin{NiceTabular}{ccc}
\Block[fill=red!10,b,r]{4-2}{two\\lines}
& & \Huge Un\\
& & deux \\
& & trois \\
& & \Huge quatre \\
text & text & \\
\end{NiceTabular}

```

two lines	Un	
	deux	
	trois	
	quatre	
text	text	



```

\begin{NiceTabular}{ccc}
\Block[fill=red!10,T,L]{4-2}{two\\lines}
& & \Huge Un\\
& & deux \\
& & trois \\
& & \Huge quatre \\
text & text & \\
\end{NiceTabular}

```

two lines	Un	
	deux	
	trois	
	quatre	
text	text	



```

\begin{NiceTabular}{ccc}
\Block[fill=red!10,B,R]{4-2}{two\\lines}
& & \Huge Un\\
& & deux \\
& & trois \\
& & \Huge quatre \\
text & text & \\
\end{NiceTabular}

```

two lines	Un	
	deux	
	trois	
	quatre	
text	text	



4.7 `\\` and `&` in the blocks

The extension `nicematrix` provides the ability to use `\\` and `&` directly in the content of a block (in order to format its contents) but there is some restrictions.

- One must not use both `\\` and `&` in the same block.
- For `\\`, there is no other restriction. It's possible to use `\\` in a block to format a text on several lines.
- In order to use `&`, the key `ampersand-in-blocks` (alias: `&-in-blocks`) must be activated¹⁷. Then, the block is divided in sub-blocks as illustrated below. Be careful: when `ampersand-in-blocks` is in force, the (main) argument of the command `\Block` is syntactically divided into sub-blocks by splitting on the ampersands `&`, the ampersands between curly braced are protected but not those in an environment.¹⁸

¹⁷Otherwise, the use of `&` in the command `\Block` will raise a TeX error :

! Extra alignment tab has been changed to \cr.

¹⁸It's not possible to write `\Block[ampersand-in-blocks]{\begin{array}{cc}1&2\end{array}}`. Of course, it's possible without the key `ampersand-in-blocks`.

With the ampersand `&`, it's possible to divide horizontally a block in sub-blocks of *the same size*.

```
\begin{NiceTabular}{11}%
  [hvlines,ampersand-in-blocks]
  & the five first naturels numbers \\
3 & \Block{}{one & two & three} \\
4 & \Block{}{one& two & three & four} \\
5 & \Block{}{one & two & three & four & five} \\
\end{NiceTabular}
```

	the five first naturels numbers				
3	one	two	three		
4	one	two	three	four	
5	one	two	three	four	five



As we can see, the blocks (which was are in fact mono-cell blocks) are divided into sub-blocks of the *same size*. However, maybe the following code would be preferred.

```
\begin{NiceTabular}{1cccc}%
  [hvlines,ampersand-in-blocks]
  & \Block{1-5}{the five first
    natural numbers} \\
3 & \Block{1-5}{one & two & three} \\
4 & \Block{1-5}{one& two &
  \cellcolor{red!15} three & four} \\
5 & one & two & three & four & five \\
\end{NiceTabular}
```

	the five first natural numbers				
3	one	two	three		
4	one	two	three	four	
5	one	two	three	four	five



In this code, we have blocks of size 1-5 which are divided into three or four sub-blocks.

We have illustrated the fact that it's possible to color the background of a subcell of the block by using the key `\cellcolor`.

4.8 The key `create-blocks-in-col`

New 7.6 The key `create-blocks-in-col` takes in as argument a list of numbers of columns and, for each of those columns, creates within that column a block for each non-empty cell (that block will enclose that non-empty cell and all the following empty cells in the column).

These blocks will be, as all the blocks, taken into account for the rules (drawn by `vlines`, `hlines`, etc.: cf. part 5, p. 11) and the commands that color the background of the cells (cf. part 6.2, p. 20). That the point using the key `create-blocks-in-col`.

```
\begin{NiceTabular}{1r}[hvlines,create-blocks-in-col=1]
\rowcolors{blue!10}{}[respect-blocks]
John & 12 \\
& 13 \\
Steph & 8 \\
Sarah & 18 \\
& 17 \\
& 15 \\
Ashley & 20 \\
Henry & 14 \\
Madison & 15 \\
& 19
\end{NiceTabular}
```

John	12
	13
Steph	8
Sarah	18
	17
	15
Ashley	20
Henry	14
Madison	15
	19



5 The rules

The usual techniques for the rules may be used in the environments of `nicematrix` (except `\vline`). However, there is some small differences with the classical environments.

5.1 Some differences with the classical environments

5.1.1 The vertical rules

In the environments of `nicematrix`, the vertical rules specified by `|` in the preambles of the environments are never broken, even by an incomplete row or by a double horizontal rule specified by `\hline\hline` (there is no need to use the package `hhline`).

```
\begin{NiceTabular}{|c|c|} \hline
First & Second \\ \hline\hline
Peter \\ \hline
Mary & George \\ \hline
\end{NiceTabular}
```

First	Second
Peter	
Mary	George



However, the vertical rules are not drawn in the blocks (created by `\Block`: cf. p. 4) nor in the corners (created by the key `corner`: cf. p. 15) nor in the potential exterior rows (created by the keys `first-row` and `last-row`: cf. p. 30).

If you use `booktabs` (which provides `\toprule`, `\midrule`, `\bottomrule`, etc.) and if you actually want to add vertical rules (which is not in the spirit of `booktabs`), you should notice that the vertical rules drawn by `nicematrix` are compatible with `booktabs`. Remark that `nicematrix` does *not* load `booktabs`.

```
$$\begin{NiceArray}{c|ccc} \toprule
a & b & c & d \\ \midrule
1 & 2 & 3 & 4 \\
1 & 2 & 3 & 4 \\ \bottomrule
\end{NiceArray}$$
```

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>
1	2	3	4
1	2	3	4



However, it's still possible to define a specifier (named, for instance, `I`) to draw vertical rules with the standard behaviour of `array`.

```
\newcolumnmtype{I}{!{\vrule}}
```

5.1.2 The command `\cline`

The horizontal and vertical rules drawn by `\hline` and the specifier “`|`” make the array larger or wider by a quantity equal to the width of the rule (with `array` and also with `nicematrix`).

For historical reasons, this is not the case with the command `\cline`, as shown by the following example.

```
\setlength{\arrayrulewidth}{2pt}
\begin{tabular}{cccc} \hline
A&B&C&D \\ \cline{2-2}
A&B&C&D \\ \hline
\end{tabular}
```

A	B	C	D
A	B	C	D



In the environments of `nicematrix`, this situation is corrected (it's still possible to go to the standard behaviour of `\cline` with the key `standard-cline`).

```
\setlength{\arrayrulewidth}{2pt}
\begin{NiceTabular}{cccc} \hline
A&B&C&D \\ \cline{2}
A&B&C&D \\ \hline
\end{NiceTabular}
```

A	B	C	D
A	B	C	D



In the environments of `nicematrix`, an instruction `\cline{i}` is equivalent to `\cline{i-i}`.

5.2 The thickness and the color of the rules

The environments of `nicematrix` provide a key `rules/width` to set the width (in fact the thickness) of the rules in the current environment. In fact, this key merely sets the value of the standard LaTeX length `\arrayrulewidth`.

It's well known that `colortbl` provides the command `\arrayrulecolor` in order to specify the color of the rules.

With `nicematrix`, it's possible to specify the color of the rules even when `colortbl` is not loaded. For sake of compatibility, the command is also named `\arrayrulecolor`. However, `nicematrix` also provides a key `rules/color`, available in `\NiceMatrixOptions` or in an individual environment, to fix the color of the rules. This key sets the value locally (whereas `\arrayrulecolor` acts globally!) and should be preferred.

```
\begin{NiceTabular}{|ccc|}[rules/color=gray]{0.9},rules/width=1pt]
\hline
rose & tulipe & lys \\
arum & iris & violette \\
muguet & dahlia & souci \\
\hline
\end{NiceTabular}
```

rose	tulipe	lys
arum	iris	violette
muguet	dahlia	souci



In fact, in that example, instead of `\hline`, it would have a better choice to use `\Hline`, provided by `nicematrix` and described just below, because it ensures a better output in the PDF viewers at the low levels of zoom.

5.3 The tools of `nicematrix` for the rules

Here are the tools provided by `nicematrix` for the rules.

- the keys `hlines`, `vlines`, `hvlines` and `hvlines-except-borders`;
- the specifier “|” in the preamble (for the environments with preamble);
- the command `\Hline`.

All these tools don't draw the rules in the blocks nor in the empty corners (when the key corners is used), nor in the exterior rows and columns.

- These blocks are:
 - the blocks created by the command `\Block`¹⁹ presented p. 4;
 - the blocks created by the key `create-blocks-in-col`: cf. p. 11;
 - the blocks implicitly delimited by the continuous dotted lines created by `\Cdots`, `\Vdots`, etc. (cf. p. 32).
- The corners are created by the key `corners` explained below (see p. 15).
- For the exterior rows and columns, see p. 30.

In particular, this remark exhibits a first difference between the standard command `\hline` and the command `\Hline` provided by `nicematrix`.

Moreover, the key `\Hline` takes in an optional argument (between square brackets) which is a list of `key=value` pairs. For the description of those keys, see `custom-line` on p. 16.²⁰

As well as the command `\Hline`, the specifier “|” supports an optional argument between square brackets for the characteristics of the rule.

¹⁹And also the command `\multicolumn` but it's recommended to use instead `\Block` in the environments of `nicematrix`.

²⁰Technical remark: If the user wants to write a command over the command `\Hline`, it shall be ensured that this new command is expandable in the TeX sens (by using, for instance, `\NewExpandableDocumentCommand` of LaTeX3, `\newcommand` of LaTeX or `\def` of TeX). Example: `\NewExpandableDocumentCommand}{\Hline[color=red]}`

```

\begin{NiceTabular}{ | c | [color=blue] c | }
\Hline
a & b \\
\Hline[color=red]
c & d \\
\Hline
\end{NiceTabular}

```

a	b
c	d



5.3.1 The keys hlines and vlines

The keys `hlines` and `vlines` draw horizontal and vertical rules. If no value is provided, all the rules are drawn.

When a value is provided, it should be a comma-separated list of numbers (corresponding to the rules which will be drawn).

- It's possible to put some intervals of integers with the syntax $i-j$
- **New 7.4** It's possible to put negative numbers (which are counted from the end).

In fact, for the environments with delimiters (such as `{pNiceMatrix}` or `{bNiceArray}`), the key `vlines` don't draw the exterior rules (this is certainly the expected behaviour).

```

$\begin{pNiceMatrix}[vlines,rules/width=0.2pt]
1 & 2 & 3 & 4 & 5 & 6 \\
1 & 2 & 3 & 4 & 5 & 6 \\
1 & 2 & 3 & 4 & 5 & 6 \\
\end{pNiceMatrix}$

```

$$\begin{pmatrix} 1 & 2 & 3 & 4 & 5 & 6 \\ 1 & 2 & 3 & 4 & 5 & 6 \\ 1 & 2 & 3 & 4 & 5 & 6 \end{pmatrix}$$


When the key `hlines` is in force, it's still possible to use `\Hline\Hline` to put a double horizontal rule. As well, it's possible to put `||` in the preamble (of an environment with preamble) to put a double vertical rule, even when the key `vlines` is in force.

```

$\begin{NiceArray}{c||cccc}[hlines,vlines]
& a & b & c & d & e \\ \Hline\Hline
x & 0 & 0 & 0 & 0 & 0 \\
y & 0 & 0 & 0 & 0 & 0 \\
z & 0 & 0 & 0 & 0 & 0 \\
\end{NiceArray}$

```

	a	b	c	d	e
x	0	0	0	0	0
y	0	0	0	0	0
z	0	0	0	0	0



5.3.2 The keys hvlines and hvlines-except-borders

The key `hvlines` (no value) is the conjunction of the keys `hlines` and `vlines`.

```

\setlength{\arrayrulewidth}{1pt}
\begin{NiceTabular}{cccc}[hvlines,rules/color=blue]
rose      & tulip & sunflower & lily \\
violet    & \Block[C,draw=red]{2-2}{\LARGE flowers} & & orchid \\
carnation & & lys \\
daisy     & peony & jasmine & magnolia \\
\end{NiceTabular}

```

rose	tulip	sunflower	lily
violet	flowers		orchid
carnation			lys
daisy	peony	jasmine	magnolia



It's worth noting that, when the key `rounded-corners` is used for the environment `{NiceTabular}`, the key `hvlines` draws rounded corners for the exterior frame of the tabular: cf. part 14.2, p. 52.

The key `hvlines-except-borders` is similar to the key `hvlines` but does not draw the rules on the horizontal and vertical borders of the array. For an example of use of that key, see the part "Use with `tcolorbox`", p. 68.

5.3.3 The (empty) corners

The four **corners** of an array will be designed by NW, SW, NE and SE (*north west, south west, north east and south east*).

For each of these corners, we will call *empty corner* (or simply *corner*) the reunion of all the empty rectangles starting from the cell actually in the corner of the array.²¹

However, it's possible, for a cell without content, to require `nicematrix` to consider that cell as not empty with the command `\NotEmpty`.

				A	
		A	A	A	
			A		
		A	A	A	A
A	A	A	A	A	A
A	A	A	A	A	A
	A	A	A		
			A		
		B		A	
			A		

In the example on the right (where B is in the center of a block of size 2×2), we have colored in blue the four (empty) corners of the array.

When the key `corners`²² is used, `nicematrix` computes the (empty) corners and these corners will be taken into account by the tools for drawing the rules (the rules won't be drawn in the corners).

```
\NiceMatrixOptions{cell-space-top-limit=3pt}
\begin{NiceTabular}{*{6}{c}}[corners,hvlines]
  & & & & A & \\
  & & A & A & A & \\
  & & & A & & \\
  & & A & A & A & A \\
A & A & A & A & A & A \\
A & A & A & A & A & A \\
  & A & A & A & & \\
  & & \Block[C]{2-2}{B} & & A & \\
  & & & & A & \\
\end{NiceTabular}
```

					A
		A	A	A	
			A		
		A	A	A	A
A	A	A	A	A	A
A	A	A	A	A	A
	A	A	A		
		B		A	
				A	



It's also possible to provide to the key `corners` a (comma-separated) list of corners (designed by NW, SW, NE and SE).

```
\NiceMatrixOptions{cell-space-top-limit=3pt}
\begin{NiceTabular}{*{6}{c}}[corners=NE,hvlines]
1\\
1&1\\
1&2&1\\
1&3&3&1\\
1&4&6&4&1\\
  & & & & & 1
\end{NiceTabular}
```

1					
1	1				
1	2	1			
1	3	3	1		
1	4	6	4	1	
					1



▷ The corners are also taken into account by the tools provided by `nicematrix` to color cells, rows and columns. These tools don't color the cells which are in the corners (cf. p. 20). The command `\TikzEveryCell` available in the `\CodeBefore` and the `\CodeAfter` (cf. p. 45) takes also into account the empty corners.

²¹For sake of completeness, we should also say that a cell contained in a block (even an empty cell) is not taken into account for the determination of the corners. That behaviour is natural. The precise definition of a "non-empty cell" is given below (cf. p. 64).

²²The key `corners` that we describe now has no direct link with the key `rounded-corners` described in the part 14.2, p. 52

5.3.4 The command `\diagbox`

The command `\diagbox` (inspired by the package `diagbox`), allows, when it is used in a cell, to slash that cell diagonally downwards.

```


$$\begin{NiceArray}{*{5}{c}}[hvlines]
\diagbox{x}{y} & e & a & b & c \\
e & e & a & b & c \\
a & a & e & c & b \\
b & b & c & e & a \\
c & c & b & a & e
\end{NiceArray}$$


```

$x \backslash y$	e	a	b	c
e	e	a	b	c
a	a	e	c	b
b	b	c	e	a
c	c	b	a	e



It's possible to use the command `\diagbox` in a `\Block`.

```


$$\begin{NiceArray}{*{5}{c}}[hvlines]
\Block{2-2}{\diagbox{x}{y}} & & a & b & c \\
& & a & b & c \\
a & a & e & c & b \\
b & b & c & e & a \\
c & c & b & a & e
\end{NiceArray}$$


```

$x \backslash y$		a	b	c
		a	b	c
a	a	e	c	b
b	b	c	e	a
c	c	b	a	e



But it's also possible to use `\diagbox` for the diagonal rule only (and the labels are put but the usual way, that is to say in cells of the tabular).

```


$$\begin{NiceArray}{*{5}{c}}[hvlines]
\Block{2-2}{\diagbox{}{}} & y & a & b & c \\
x & & a & b & c \\
a & a & e & c & b \\
b & b & c & e & a \\
c & c & b & a & e
\end{NiceArray}$$


```

$x \backslash y$	a	b	c
x	a	b	c
a	a	e	c
b	b	c	e
c	c	b	a



Nevertheless, it's always possible to draw whatever rule we wish with TikZ in the `\CodeAfter` (or the `\CodeBefore`) by using the PGF/TikZ nodes created by `nicematrix`: cf. p. 57.

5.3.5 Commands for customized rules

It's also possible to define commands and letters for customized rules with the key `custom-line` available in `\NiceMatrixOptions` and in the options of individual environments. That key takes in as argument a list of `key=value` pairs. First, there is three keys to define the tools which will be used to use that new type of rule.

- the key `command` is the name (*with* or *without* the backslash) of a command that will be created by `nicematrix` and that will be available for the final user in order to draw horizontal rules (similarly to `\hline`);
- the key `ccommand` is the name (*with* or *without* the backslash) of a command that will be created by `nicematrix` and that will be available for the final user to order to draw partial horizontal rules (similarly to `\cline`, hence the name `ccommand`): the argument of that command will be list of intervals of columns specified by the syntax i or $i-j$.²³
- the key `letter` takes in as argument a letter²⁴ that the user will use in the preamble of an environment with preamble (such as `\NiceTabular`) in order to specify a vertical rule.

²³It's recommended to use such commands only once in a row because each use will create space between the rows corresponding to the total width of the rule. Likewise, it's possible to draw several rules with only one use of the command.

²⁴The following letters are forbidden: `lcrpmbVX|()[]!@<>`

We will now speak of the keys which describe the rule itself. Those keys may also be used in the (optional) argument of an individual command `\Hline` or in the (optional) argument of a specifier “|” in the preamble of an environment.

There are three possibilities.

- *First possibility*

It’s possible to specify composite rules, with a color and a color for the inter-rule space (as possible with `colortbl` for instance).

- the key `multiplicity` is the number of consecutive rules that will be drawn: for instance, a value of 2 will create double rules such those created by `\hline\hline` or `||` in the preamble of an environment;
- the key `color` sets the color of the rules ;
- the key `sep-color` sets the color between two successive rules (should be used only in conjunction with `multiplicity`). The name of that key is inspired by the command `\doublerulesepcolor` of `colortbl`.

That system may be used, in particular, for the definition of commands and letters to draw rules with a specific color (and those rules will respect the blocks and corners as do all the rules of `nicematrix`).

```
\begin{NiceTabular}{lcIcIc}[custom-line = {letter=I, color=red}]
\Hline
      & \Block{1-3}{dimensions} \\
      & L & l & h \\
\Hline
Product A & 3 & 1 & 2 \\
Product B & 1 & 3 & 4 \\
Product C & 5 & 4 & 1 \\
\Hline
\end{NiceTabular}
```

	dimensions		
	L	l	H
Product A	3	1	2
Product B	1	3	4
Product C	5	4	1



The key `sep-color` with the value `white` may also be used in case of an horizontal double-rule on the top of a colored cell (if we want the space between both rules above the cell not colored by the color of the cell).

```
\NiceMatrixOptions
{
  custom-line =
  {
    command = \DoubleRule ,
    multiplicity = 2 ,
    sep-color = white
  }
}

\begin{NiceTabular}{ccc}
one & two & three \\
\DoubleRule
four & \cellcolor{yellow} five & six \\
\end{NiceTabular}
```

one	two	three
four	five	six



- *Second possibility*

It's possible to use the key `tikz` (if TikZ is loaded). In that case, the rule is drawn directly with TikZ by using as parameters the value of the key `tikz` which must be a list of *key=value* pairs which may be applied to a TikZ path.

By default, no space is reserved for the rule that will be drawn with TikZ. It is possible to specify a reservation (horizontal for a vertical rule and vertical for an horizontal one) with the key `total-width`. That value of that key, is, in some ways, the width of the rule that will be drawn (`nicematrix` does not compute that width from the characteristics of the rule specified in `tikz`).

```
\usepackage{tikz} % in the preamble
\usetikzlibrary{decorations.pathmorphing} % in the preamble

\NiceMatrixOptions
{
  custom-line =
  {
    letter = I ,
    tikz = { decorate, decoration = zigzag } ,
    total-width = 6 pt
  }
}

\begin{NiceTabular}{cIcIc}
one & two & three \\
four & five & six \\
seven & eight & nine
\end{NiceTabular}
```

one	>	two	>	three
four	>	five	>	six
seven	>	eight	>	nine



New 7.7

In fact, `nicematrix` defines by default the commands `\hdashedline` and `\cdashedline` and the letter “;” for dashed rules. They are available when TikZ is loaded (if they are used when TikZ is not loaded, an error message for unknown command will be displayed).

```
% yet present in nicematrix.sty
\NiceMatrixOptions
{
  custom-line =
  {
    letter = ; ,
    command = \hdashedline ,
    ccommand = \cdashedline ,
    tikz = { dash pattern = on 4 pt off 2pt } ,
    total-width = \pgflinewidth
  }
}
```

When the TikZ library `decorations` has been loaded (with `\usetikzlibrary{decorations}`), the key `dash expand off` is added.

Thus, it's possible to use the commands `\hdashedline` and `\cdashedline` to draw horizontal dashed rules.

```
\usepackage{tikz} % in the preamble
\usetikzlibrary{decorations} % in the preamble
```

```

\begin{pNiceMatrix}
1 & 2 & 3 & 4 & 5 \\
\hdashedline
6 & 7 & 8 & 9 & 10 \\
\cdashedline{1,4-5}
11 & 12 & 13 & 14 & 15
\end{pNiceMatrix}

```

$$\left(\begin{array}{ccccc} 1 & 2 & 3 & 4 & 5 \\ \hline 6 & 7 & 8 & 9 & 10 \\ \hline 11 & 12 & 13 & 14 & 15 \end{array} \right)$$



In the environments with an explicit preamble (like `{NiceTabular}`, `{NiceArray}`, etc.), it's possible to draw a vertical dashed line with the specifier “;”:

```

$\left(\begin{NiceArray}{cccc;c}
1 & 2 & 3 & 4 & 5 \\
6 & 7 & 8 & 9 & 10 \\
11 & 12 & 13 & 14 & 15
\end{NiceArray}\right)

```

$$\left(\begin{array}{cccc|c} 1 & 2 & 3 & 4 & 5 \\ 6 & 7 & 8 & 9 & 10 \\ 11 & 12 & 13 & 14 & 15 \end{array} \right)$$



- *Third possibility* : the key `dotted`

The extension `nicematrix` provides “continuous dotted lines” for leading rules in the mathematical matrices (with the commands `\Cdots`, `\Vdots`, etc.: cf. p. 32). For these lines, `nicematrix` does not use `TikZ` but an internal system.

Even though that system was not designed for the rules of a tabular, `nicematrix` provides that type of line to the final user with a key `dotted` in the key `custom-line`.

The initial value of the key `total-width` is, in this case, equal to the diameter of the dots (but the user may change the value with the key `total-width` if needed). Those dotted rules are also used by `nicematrix` to draw continuous dotted rules between cells of the matrix with `\Cdots`, `\Vdots`, etc. (cf. p. 32).

In fact, `nicematrix` defines by default the commands `\hdottedline` and `\cdottedline` and the letter “:” for those dotted rules.²⁵

```

% yet present in nicematrix.sty
\NiceMatrixOptions
{
  custom-line =
  {
    letter = : ,
    command = \hdottedline ,
    ccommand = \cdottedline ,
    dotted
  }
}

```

As previously said, the previous keys may be used in the optional argument of an individual command `\Hline` and in the optional argument of a specifier “|” in the preamble of an environment (for instance `{NiceTabular}`).

However, in that case, it's also possible to use two other keys, `start` and `end`, which specify the extremities of the rule.

```

\begin{NiceTabular}{cc|[color=blue,start=2]ccc}
one & two & three & four
\Hline[start=2,end=3]
five & six & seven & eight \\
nine & ten & eleven & twelve
\end{NiceTabular}

```

one	two	three	four
five	six	seven	eight
nine	ten	eleven	twelve



²⁵However, it's possible to overwrite those definitions with a `custom-line` (in order, for example, to switch to dashed lines).

6 The color of the background of the rows and columns

6.1 Use of colortbl

We recall that the package `colortbl` can be loaded directly with `\usepackage{colortbl}` or by loading `xcolor` with the key `table`: `\usepackage[table]{xcolor}`.

However, there is two drawbacks:

- The package `colortbl` patches `array`, leading to some incompatibilities (for instance with the command `\hdotsfor`).
- The package `colortbl` constructs the array row by row, alternating colored rectangles, rules and contents of the cells. The resulting PDF is difficult to interpret by some PDF viewers and may lead to artefacts on the screen.
 - Some rules seem to disappear. This is because many PDF viewers give priority to graphical element drawn posteriorly (which is in the spirit of the “painting model” of PostScript and PDF). Concerning this problem, MuPDF (which is used, for instance, by SumatraPDF) gives better results than Adobe Reader.
 - A thin white line may appear between two cells of the same color. This phenomenon occurs when each cell is colored with its own instruction `fill` (the PostScript operator `fill` noted `f` in PDF). This is the case with `colortbl`: each cell is colored on its own, even when `\columncolor` or `\rowcolor` is used.
As for this phenomenon, Adobe Reader gives better results than MuPDF (however, it seems, that, in recent versions of MuPDF, the problem has been solved...).

The package `nicematrix` provides tools to avoid both problems.

6.2 The tools of `nicematrix` in the `\CodeBefore`

The package `nicematrix` provides some tools to draw the colored panels first, and, then, the content of the cells and the rules. This strategy is more conform to the “painting model” of the formats PostScript and PDF and is more suitable for the PDF viewers. However, it requires several compilations.²⁶

The extension `nicematrix` provides a key `code-before` for some code that will be executed before the drawing of the tabular.

An alternative syntax is provided: it’s possible to put the content of that `code-before` between the keywords `\CodeBefore` and `\Body` at the beginning of the environment.

```
\begin{pNiceArray}{preamble}
\CodeBefore [options]
  instructions of the code-before
\Body
  contents of the environment
\end{pNiceArray}
```

The optional argument between square brackets is a list of `key=value` pairs which will be presented progressively in this documentation.²⁷

New commands are available in that `\CodeBefore`: `\cellcolor`, `\rectanglecolor`, `\rowcolor`, `\columncolor`, `\rowcolors`, `\rowlistcolors`, `\chessboardcolors` and `\arraycolor`.²⁸

The names of these commands are inspired by the names of the commands provided by `colortbl`.

These commands don’t color the cells which are in the “corners” if the key `corners` is used. That key has been described p. 15.

²⁶If you use Overleaf, Overleaf will do automatically a sufficient number of compilations.

²⁷The available keys are `create-cell-nodes`, `sub-matrix` (and its subkeys) and `delimiters-color`.

²⁸Remark that, in the `\CodeBefore`, PGF/TikZ nodes of the form “(i-lj)” are also available to indicate the position to the potential rules: cf. p. 61.



These commands respect the rounded corners if the key `rounded-corners` (described in the part 14.2 at the page 52) has been used.

All these commands accept an optional argument, between square brackets and in first position. That optional argument may contain two elements (separated by a comma)

- the colorimetric space (RGB, `rgb`, HTML, etc) as specified by the the extension `xcolor`;
- a specification of opacity of the form `opacity = value`.²⁹

We describe now in detail those commands.

- The command `\cellcolor` takes its name from the command `\cellcolor` of `colortbl`.

This command takes in as mandatory arguments a color and a **list of cells**, each of which with the format `i-j` where `i` is the number of the row and `j` the number of the column of the cell. In fact, despite its name, this command may be used to color a whole row (with the syntax `i-`) or a whole column (with the syntax `-j`).

```
\begin{NiceTabular}{ccc}[hvlines]
\CodeBefore
  \cellcolor[HTML]{FFFF88}{3-1,2-2,-3}
\Body
a & b & c \\
e & f & g \\
h & i & j \\
\end{NiceTabular}
```

a	b	c
e	f	g
h	i	j



- The command `\rectanglecolor` takes three mandatory arguments. The first is the color. The second is the upper-left cell of the rectangle and the third is the lower-right cell of the rectangle.

```
\begin{NiceTabular}{ccc}[hvlines]
\CodeBefore
  \rectanglecolor{blue!15}{2-2}{3-3}
\Body
a & b & c \\
e & f & g \\
h & i & j \\
\end{NiceTabular}
```

a	b	c
e	f	g
h	i	j



- The command `\arraycolor` takes in as mandatory argument a color and color the whole tabular with that color (except the potential exterior rows and columns: cf. p. 30). It's only a particular case of `\rectanglecolor`.

- The command `\chessboardcolors` takes in as mandatory arguments two colors and it colors the cells of the tabular in quincunx with these colors.

```
$$\begin{pNiceMatrix}[r,margin]
\CodeBefore
  \chessboardcolors{red!15}{blue!15}
\Body
1 & -1 & 1 \\
-1 & 1 & -1 \\
1 & -1 & 1 \\
\end{pNiceMatrix}$$
```

1	-1	1
-1	1	-1
1	-1	1



²⁹Caution: that feature creates instructions of transparency in the PDF and some readers of PDF don't support such instructions. The opacity is applied by using `\pgfsetfillopacity` of PGF.

We have used the key `r` which aligns all the columns rightwards (cf. p. 53).

- The command `\rowcolor` takes its name from the command `\rowcolor` of `colortbl`. Its first mandatory argument is the color and the second is a comma-separated list of rows or interval of rows with the form $a-b$ (an interval of the form $a-$ represent all the rows from the row a until the end).

```

 $\begin{NiceArray}{lll}[hvlines]
\CodeBefore
  \rowcolor{red!15}{1,3-5,8-}
\Body
a_1 & b_1 & c_1 \\
a_2 & b_2 & c_2 \\
a_3 & b_3 & c_3 \\
a_4 & b_4 & c_4 \\
a_5 & b_5 & c_5 \\
a_6 & b_6 & c_6 \\
a_7 & b_7 & c_7 \\
a_8 & b_8 & c_8 \\
a_9 & b_9 & c_9 \\
a_{10} & b_{10} & c_{10} \\
\end{NiceArray}$ 

```

a_1	b_1	c_1
a_2	b_2	c_2
a_3	b_3	c_3
a_4	b_4	c_4
a_5	b_5	c_5
a_6	b_6	c_6
a_7	b_7	c_7
a_8	b_8	c_8
a_9	b_9	c_9
a_{10}	b_{10}	c_{10}



- The command `\columncolor` takes its name from the command `\columncolor` of `colortbl`. Its syntax is similar to the syntax of `\rowcolor`.
- The command `\rowcolors` (with a s) takes its name from the command `\rowcolors` of `colortbl`. The s emphasizes the fact that there is *two* colors. This command colors alternately the rows of the tabular with the two colors (provided in second and third argument), beginning with the row whose number is given in first (mandatory) argument. One of the arguments of color may be empty (no color is applied in the corresponding rows).

In fact, the first (mandatory) argument is, more generally, a comma separated list of intervals describing the rows involved in the action of `\rowcolors` (an interval of the form $i-$ describes in fact the interval of all the rows of the tabular, beginning with the row i).

The last argument of `\rowcolors` is an optional list of pairs $key=value$ (the optional argument in the first position corresponds to the colorimetric space). The available keys are `cols`, `restart` and `respect-blocks`.

- The key `cols` describes a set of columns. The command `\rowcolors` will color only the cells of these columns. The value is a comma-separated list of intervals of the form $i-j$ (where i or j may be replaced by $*$).
- With the key `restart`, each interval of rows (specified by the first mandatory argument) begins with the same color.³⁰
- With the key `respect-blocks` the “rows” alternately colored may extend over several rows if they have to incorporate blocks (created with the command `\Block`: cf. p. 4).

³⁰Otherwise, the color of a given row relies only upon the parity of its absolute number.

```

\begin{NiceTabular}{clr}[hvlines]
\CodeBefore
  \rowcolors[gray]{2}{0.8}{}[cols=2-3,restart]
\Body
\Block{1-*}{Results} \
John & 12 \
Stephen & 8 \
Sarah & 18 \
Ashley & 20 \
Henry & 14 \
Madison & 15
\end{NiceTabular}

```

Results		
A	John	12
	Stephen	8
B	Sarah	18
	Ashley	20
	Henry	14
	Madison	15



```

\begin{NiceTabular}{lr}[hvlines,create-blocks-in-col=1]
\rowcolors{blue!10}{[respect-blocks]
John      & 12 \
          & 13 \
Steph     & 8 \
Sarach    & 18 \
          & 17 \
          & 15 \
Ashley    & 20 \
Henry     & 14 \
Madison   & 15 \
          & 19
\end{NiceTabular}

```

John	12
	13
Steph	8
Sarah	18
	17
	15
Ashley	20
Henry	14
Madison	15
	19



- The extension `nicematrix` provides also a command `\rowlistcolors`. This command generalises the command `\rowcolors`: instead of two successive arguments for the colors, this command takes in an argument which is a (comma-separated) list of colors. In that list, the symbol `=` represent a color identical to the previous one.

```

\begin{NiceTabular}{c}
\CodeBefore
  \rowlistcolors{1}{red!15,blue!15,green!15}
\Body
Peter \
James \
Abigail \
Elisabeth \
Claudius \
Jane \
Alexandra \
\end{NiceTabular}

```

Peter
James
Abigail
Elisabeth
Claudius
Jane
Alexandra



It's also possible to use in the command `\rowlistcolors` a color series defined by the command `\definecolorseries` of `xcolor` (and initialized with the command `\resetcolorseries`³¹).

³¹For the initialization, in the following example, you have used the counter `iRow` (which corresponds to the internal TeX counter `\c@iRow`) which, when used in the `\CodeBefore` (and in the `\CodeAfter`) corresponds to the number of rows of the array: cf. p 55. That leads to an adjustment of the gradation of the colors to the size of the tabular.

```

\begin{NiceTabular}{c}
\CodeBefore
  \definecolorseries{BlueWhite}{rgb}{last}{blue}{white}
  \resetcolorseries[\value{iRow}]{BlueWhite}
  \rowlistcolors{1}{BlueWhite!!+}
\Body
Peter \\
James \\
Abigail \\
Elisabeth \\
Claudius \\
Jane \\
Alexandra \\
\end{NiceTabular}

```

Peter
James
Abigail
Elisabeth
Claudius
Jane
Alexandra



We recall that all the color commands we have described don't color the cells which are in the "corners". In the following example, we use the key `corners=NE` to require the determination of the corner *north east* (NE).

```

\begin{NiceTabular}{cccccc}[corners=NE,margin,hvlines,first-row,first-col]
\CodeBefore
  \rowlistcolors{1}{blue!15, }
\Body
  & 0 & 1 & 2 & 3 & 4 & 5 & 6 \\
0 & 1 \\
1 & 1 & 1 \\
2 & 1 & 2 & 1 \\
3 & 1 & 3 & 3 & 1 \\
4 & 1 & 4 & 6 & 4 & 1 \\
5 & 1 & 5 & 10 & 10 & 5 & 1 \\
6 & 1 & 6 & 15 & 20 & 15 & 6 & 1 \\
\end{NiceTabular}

```

	0	1	2	3	4	5	6
0	1						
1	1	1					
2	1	2	1				
3	1	3	3	1			
4	1	4	6	4	1		
5	1	5	10	10	5	1	
6	1	6	15	20	15	6	1



The previous example uses the keys `first-row` and `first-col` which are described in the chapter concerning the «exterior» rows and columns (cf. p. 30).

As one can see, *by default*, the coloring commands that we have described don't apply in those exterior rows and columns.

However, it may still be possible to color in those rows and columns by providing explicitly the numbers of those rows and columns.

In the following example, we require a color in the column 0 (which is the «first column» and which exists because the key `first-col` has been used).

```

\begin{NiceTabular}{cccccc}[corners=NE,margin,hvlines,first-row,first-col]
\CodeBefore
  \rowlistcolors{1}{blue!15, }
  \columncolor{red!15}{0}
\Body
  & 0 & 1 & 2 & 3 & 4 & 5 & 6 \\
0 & 1 \\
1 & 1 & 1 \\
2 & 1 & 2 & 1 \\
3 & 1 & 3 & 3 & 1 \\
4 & 1 & 4 & 6 & 4 & 1 \\
5 & 1 & 5 & 10 & 10 & 5 & 1 \\
6 & 1 & 6 & 15 & 20 & 15 & 6 & 1 \\
\end{NiceTabular}

```

	0	1	2	3	4	5	6
0	1						
1	1	1					
2	1	2	1				
3	1	3	3	1			
4	1	4	6	4	1		
5	1	5	10	10	5	1	
6	1	6	15	20	15	6	1



One should remark that all the previous commands are compatible with the commands of `booktabs` (`\toprule`, `\midrule`, `\bottomrule`, etc). However, `booktabs` is *not* loaded by `nicematrix`.

```
\begin{NiceTabular}[c]{1SSSS}
\CodeBefore
  \rowcolor{red!15}{1-2}
  \rowcolors{3}{blue!15}{}
\Body
\toprule
\Block[C]{2-1}{Product} &
\Block{1-3}{dimensions (cm)} & &
\Block{2-1}{\rotate Price} \\
\cmidrule{rl}{2-4}
& L & l & h \\
\midrule
small & 3 & 5.5 & 1 & 30 \\
standard & 5.5 & 8 & 1.5 & 50.5 \\
premium & 8.5 & 10.5 & 2 & 80 \\
extra & 8.5 & 10 & 1.5 & 85.5 \\
special & 12 & 12 & 0.5 & 70 \\
\bottomrule
\end{NiceTabular}
```

Product	dimensions (cm)			Price
	L	l	h	
small	3	5.5	1	30
standard	5.5	8	1.5	50.5
premium	8.5	10.5	2	80
extra	8.5	10	1.5	85.5
special	12	12	0.5	70



We have used the type of column `S` of `siunitx` (which should be loaded by the user).

It's also possible, in the `\CodeBefore`, to use the commands `\EmptyColumn` and `\EmptyRow`. The command `\EmptyColumn` takes in as argument a (comma-separated) list of numbers of columns and requires that no rules nor background colors will be drawn in the corresponding columns. The command `\EmptyRow` is similar for the rows.

```
\begin{NiceTabular}{cccc}[hvlines,no-cell-nodes]
\CodeBefore
  \rowcolor{blue!15}{1}
  \EmptyColumn{3}
\Body
  one & two && three & four \\
  one & \Block{}{two\\ rows} && three & four \\
\end{NiceTabular}
```

one	two	three	four
one	two rows	three	four



6.3 Color tools to be used inside the tabular

The extension `nicematrix` also provides commands to be used directly in the tabular (as does `colortbl`). These commands are the following several commands available (the first three ones are inspired by the similar commands of `colortbl`).

- `\cellcolor` which colorizes a cell;³²
- `\rowcolor` which must be used in a cell and which colorizes the end of the row;³³
- `\columncolor` which must be used in the preamble of the environment with the same syntax as the corresponding command of `colortbl` (however, unlike the command `\columncolor` of `colortbl`, this command `\columncolor` can appear within another command, itself used in the

³²That command `\cellcolor` will delete the following spaces (which does not the command `\cellcolor` of `colortbl`). Moreover, if one wishes to define a command above that command `\cellcolor`, it must be protected in the TeX sens (whereas, if it were the command `\cellcolor` of `colortbl`, one should, no the contrary, write a *fully expandable* command).

³³If you want a commande to color the following n rows, consider the command `\RowStyle` and its key `fillcolor`, p. 27

preamble of the array; on the other hand, the two final optional arguments for fixing offset are not supported);

- `\rowcolors` which takes in as arguments two colors and color the rest of the tabular with those colors (must be used after a potential `\hline`, `\Hline` or `\toprule!`) ;
- `\rowlistcolors` which takes in as argument a color and color the rest of the tabular with the colors of that list of colors.³⁴

These commands are compatible with the commands for the overlays of Beamer (`\only`, etc.)

```
\NewDocumentCommand { \Blue } { } { \columncolor{blue!15} }
\begin{NiceTabular}{>{\Blue}c>{\Blue}cc}
\toprule
\rowcolor{red!15}
Last name & First name & Birth day \\
\midrule
Achard & Jacques & 5 juin 1962 \\
Lefebvre & Mathilde & 23 mai 1988 \\
Vanesse & Stephany & 30 octobre 1994 \\
Dupont & Chantal & 15 janvier 1998 \\
\bottomrule
\end{NiceTabular}
```

Last name	First name	Birth day
Achard	Jacques	5 juin 1962
Lefebvre	Mathilde	23 mai 1988
Vanesse	Stephany	30 octobre 1994
Dupont	Chantal	15 janvier 1998

Each use of the `\rowlistcolors` (or `\rowcolors`, which is, in fact, a special case of `\rowlistcolors`) stops the potential coloring schemes³⁵ specified by a previous command `\rowlistcolors`. In particular, it's possible to start coloring the rows with `\rowlistcolors{...}` and stop coloring by a command `\rowlistcolors` with an empty argument.

```
\begin{NiceTabular}{c}[hvlines]
one \\
two \\
\rowlistcolors{red!15}
three \\
four \\
five \\
\rowlistcolors{}
six \\
seven \\
\end{NiceTabular}
```

one
two
three
four
five
six
seven

6.4 The special color “nocolor”

The extension `nicematrix` provides the special color `nocolor` which may be used in all the coloring commands provided by `nicematrix` (in the `\CodeBefore` or in the array itself).

The cells marked by this color won't be colored, whatever the other instructions of coloring which may apply to these cells.

Therefore, the color `nocolor` is an easy way to add an exception to a more general coloring command.

³⁴When the command `\rowlistcolors` (or the command `\rowcolors`) is used in a cell of the column j of the array, the command applies only on the columns above j (by design).

³⁵We say *schemes* in plural form because it's possible to start simultaneously several coloring schemes if they apply on different columns.

7 The command `\RowStyle`

The command `\RowStyle` takes in as argument some formatting instructions that will be applied to each cell on the rest of the current row.

That command also takes in as optional argument (between square brackets) a list of *key=value* pairs.

- The key `nb-rows` sets the number of rows to which the specifications of the current command will apply (with the special value `*`, it will apply to all the following rows).
- The keys `cell-space-top-limit`⁺, `cell-space-bottom-limit`⁺ and `cell-space-limits`⁺ are available with the same meaning that the corresponding global keys (cf. p. 2).

- The key `fill` (alias: `rowcolor`) sets the color of the background and `opacity`³⁶ sets its opacity.

These commands have a normal syntax but also an “additive” syntax. That means that it’s possible to write, for example, `cell-space-limits = 2pt` but also `cell-space-limits += 1pt`.

- If the key `rounded-corners` is used, that background will have rounded-corners.
- The key `color` sets the color of the text.³⁷
- The key `bold` enforces bold characters for the cells of the row, both in math and text mode.

```
\begin{NiceTabular}{cccc}
\hline
\RowStyle[cell-space-limits=3pt]{\rotate}
first & second & third & fourth \\
\RowStyle[nb-rows=2,fill=blue!50,color=white]{\sffamily}
1 & 2 & 3 & 4 \\
I & II & III & IV
\end{NiceTabular}
```

first	second	third	fourth
1	2	3	4
I	II	III	IV



The command `\rotate` is described p. 54.

8 The width of the columns

8.1 Basic tools

In the environments with an explicit preamble (like `{NiceTabular}`, `{NiceArray}`, etc.), it’s possible to fix the width of a given column with the standard letters `w`, `W`, `p`, `b` and `m` of the package `array` (which is loaded by `nicematrix`).

```
\begin{NiceTabular}{W{c}{2cm}cc}[hvlines]
Paris & New York & Madrid \\
Berlin & London & Roma \\
Rio & Tokyo & Oslo
\end{NiceTabular}
```

Paris	New York	Madrid
Berlin	London	Roma
Rio	Tokyo	Oslo



³⁶Caution: that feature creates instructions of transparency in the PDF and some readers of PDF don’t support such instructions. The opacity is applied by using `\pgfsetfillopacity`.

³⁷The key `color` uses the command `\color` but also inserts an instruction `\leavevmode` before. This instruction prevents an extra vertical space in the cells which belong to columns of type `p`, `b`, `m` and `X` (which start in vertical mode of LaTeX). For the columns `V` (of `varwidth`), that’s not enough, except when LuaLaTeX is used with the package `luacolor` (see question 460489 on TeX StackExchange).

In the environments of `nicematrix`, it's also possible to fix the *minimal* width of all the columns (except the potential exterior columns: cf. p. 30) directly with the key `columns-width`.

```


$$\begin{matrix} 1 & & 12 & & -123 \\ 12 & & 0 & & 0 \\ 4 & & 1 & & 2 \end{matrix}$$


```



Note that the space inserted between two columns (equal to `2 \tabcolsep` in `{NiceTabular}` and to `2 \arraycolsep` in the other environments) is not suppressed (of course, it's possible to suppress this space by setting `\tabcolsep` or `\arraycolsep` equal to `0 pt` before the environment).

It's possible to give the special value `auto` to the option `columns-width`: all the columns of the array will have a width equal to the widest cell of the array.³⁸

```


$$\begin{matrix} 1 & & 12 & & -123 \\ 12 & & 0 & & 0 \\ 4 & & 1 & & 2 \end{matrix}$$


```



Without surprise, it's possible to fix the minimal width of the columns of all the arrays of a current scope with the command `\NiceMatrixOptions`.

```


$$\begin{matrix} a & b \\ c & d \end{matrix} = \begin{pmatrix} 1 & 1245 \\ 345 & 2 \end{pmatrix}$$


```



It's also possible to fix a zone where all the matrices will have their columns of the same width, equal to the widest cell of all the matrices. This construction uses the environment `{NiceMatrixBlock}` with the option `auto-columns-width`³⁹. The environment `{NiceMatrixBlock}` has no direct link with the command `\Block` presented previously in this document (cf. p. 4).

```


$$\begin{matrix} \begin{matrix} 9 & 17 \\ -2 & 5 \end{matrix} \\ \begin{matrix} 1 & 1245345 \\ 345 & 2 \end{matrix} \end{matrix}$$


```



8.2 The columns V of varwidth

Let's recall first the behaviour of the environment `{varwidth}` of the eponymous package `varwidth`. That environment is similar to the classical environment `{minipage}` but the width provided in the


³⁸The result is achieved with only one compilation (but PGF/TikZ will have written information in the `aux` file and a message requiring a second compilation will appear).

³⁹At this time, this is the only usage of the environment `{NiceMatrixBlock}` but it may have other usages in the future.

argument is only the *maximal* width of the created box. In the general case, the width of the box constructed by an environment `{varwidth}` is the natural width of its contents.

That point is illustrated on the following examples.

```
\fbox{%
\begin{varwidth}{8cm}
\begin{itemize}
\item first item
\item second item
\end{itemize}
\end{varwidth}}
```



```
\fbox{%
\begin{minipage}{8cm}
\begin{itemize}
\item first item
\item second item
\end{itemize}
\end{minipage}}
```



The package `varwidth` provides also the column type `V`. A column of type `V{<dim>}` encapsulates all its cells in a `{varwidth}` with the argument `<dim>` (and does also some tuning).

When the package `varwidth` is loaded, the columns `V` of `varwidth` are supported by `nicematrix`.

```
\begin{NiceTabular}[corners=NW,hvlines]{V{3cm}V{3cm}V{3cm}}
& some text & some very very very long text \\
some very very very long text & \\
some very very very long text & \\
\end{NiceTabular}
```



	some text	some very very very long text
some very very very long text		
some very very very long text		

Concerning `nicematrix`, one of the interests of this type of columns is that, for a cell of a column of type `V`, the PGF/TikZ node created by `nicematrix` for the content of that cell has a width adjusted to the content of the cell : cf. p. 58.

The columns `V` of `nicematrix` supports the keys `t`, `p`, `m`, `b`, `l`, `c` and `r` also supported by the columns `X`: see their description in the section 8.3, p. 29.

One should remark that the extension `varwidth` (at least in its version 0.92) has some problems: for instance, with `LuaLaTeX`, it does not work when the content begins with `\color`. Moreover, `varwidth` must be loaded after the package `array` (itself loaded by `nicematrix`).

8.3 The columns X

The environment `{NiceTabular}` provides `X` columns similar to those provided by the environment `{tabularx}` of the eponymous package.⁴⁰

⁴⁰The environment `{tabularx}` catches its body as an argument and typesets it several times during a LaTeX run in order to compute the width of the columns. On its side, `{NiceTabular}` does not catch its body as an argument (except when the key `light-syntax` is in force) and typesets the tabular only once but writes informations on the `aux` file, and requires several compilations.

The required width of the tabular may be specified with the key `width` (in `{NiceTabular}` or in `\NiceMatrixOptions`). The initial value of this parameter is the parameter `\linewidth` of LaTeX (and not `\textwidth`).

For sake of similarity with the environment `{tabularx}`, `nicematrix` also provides an environment `{NiceTabularX}` with a syntax similar to the syntax of `{tabularx}`, that is to say with a first mandatory argument which is the width of the tabular.

The specifier `X` takes in an optional argument (between square brackets) which is a list of keys.

- It's possible to give a weight for the column by providing a positive number directly as argument of the specifier `X`. For example, a column `X[0.5]` will have a width equal to the half of the width of a column `X` (which has a weight equal to 1).
- It's possible to specify an horizontal alignment with one of the letters `l`, `c` and `r` (which insert respectively `\raggedright`, `\centering` and `\raggedleft` followed by `\arraybackslash`).⁴¹
- It's possible to specify a vertical alignment with one of the keys `t` (alias `p`), `m` and `b` (which construct respectively columns of type `p`, `m` and `b`). The initial value is `t`.
- It's possible to use the key `V` in a column of type `X`. When that key is used, the column `X` behaves in fact like a column `V` of the extension `varwidth` (which must have been loaded by the user). Hence, the width of the columns, as computed by the `X` process, is in fact the *maximal* width of the column.

```
\begin{NiceTabular}[width=9cm]{X[c,m]X[0.5,c,m]}[hvlines]
a rather long text which fits on several lines
& a rather long text which fits on several lines \\
a shorter text & a shorter text
\end{NiceTabular}
```

a rather long text which fits on several lines	a rather long text which fits on several lines
a shorter text	a shorter text



9 The exterior rows and columns

The options `first-row`, `last-row`, `first-col` and `last-col` allow the composition of exterior rows and columns in the environments of `nicematrix`. It's particularly interesting for the (mathematical) matrices.

A potential “first row” (exterior) has the number 0 (and not 1). Idem for the potential “first column”.

```
\begin{pNiceMatrix}[first-row,last-row,first-col,last-col,xdots/nullify]
& C_1 & & \Cdots & & & C_4 & & \\
L_1 & & a_{11} & & a_{12} & & a_{13} & & a_{14} & & L_1 & \\
\Vdots & & a_{21} & & a_{22} & & a_{23} & & a_{24} & & \Vdots & \\
& & a_{31} & & a_{32} & & a_{33} & & a_{34} & & \\
L_4 & & a_{41} & & a_{42} & & a_{43} & & a_{44} & & L_4 & \\
& & C_1 & & \Cdots & & & & C_4 & & & \\
\end{pNiceMatrix}
```



$$\begin{array}{c}
 C_1 \cdots \cdots \cdots C_4 \\
 L_1 \left(\begin{array}{cccc}
 a_{11} & a_{12} & a_{13} & a_{14} \\
 a_{21} & a_{22} & a_{23} & a_{24} \\
 a_{31} & a_{32} & a_{33} & a_{34} \\
 a_{41} & a_{42} & a_{43} & a_{44}
 \end{array} \right) L_1 \\
 \vdots \\
 \vdots \\
 L_4 \left(\begin{array}{cccc}
 a_{41} & a_{42} & a_{43} & a_{44}
 \end{array} \right) L_4 \\
 C_1 \cdots \cdots \cdots C_4
 \end{array}$$

⁴¹In fact, when `ragged2e` is loaded, `nicematrix` uses the commands `\RaggedRight`, `\Centering` and `\RaggedLeft` of `ragged2e` instead of the commands `\raggedright`, `\centering` and `\raggedleft`. That ensures a better output.

Remarks


- As shown in the previous example, the horizontal and vertical rules don't extend in the exterior rows and columns. This remark also applies to the customized rules created by the key `custom-line` (cf. p. 16).
- A specification of color present in `code-for-first-row` also applies to a dotted line drawn in that exterior “first row” (except if a value has been given to `xdots/color`). Idem for the other exterior rows and columns.
- Logically, the potential option `columns-width` (described p. 27) doesn't apply to the “first column” and “last column”.
- For technical reasons, it's not possible to use the option of the command `\` after the “first row” or before the “last row”. The placement of the delimiters would be wrong. If you are looking for a workaround, consider the command `\SubMatrix` in the `\CodeAfter` (and the `\CodeBefore`) described p. 41.

10 The continuous dotted lines

Inside the environments of the package `nicematrix`, new commands are defined: `\Ldots`, `\Cdots`, `\Vdots`, `\Ddots` and `\Iddots`. These commands are intended to be used in place of `\dots`, `\cdots`, `\vdots`, `\ddots` and `\iddots`.⁴³


Each of them must be used alone in the cell of the array and it draws a dotted line between the first non-empty cells⁴⁴ on both sides of the current cell. Of course, for `\Ldots` and `\Cdots`, it's an horizontal line; for `\Vdots`, it's a vertical line and for `\Ddots` and `\Iddots` diagonal ones. It's possible to change the color of these lines with the option `color`.⁴⁵

```
\begin{bNiceMatrix}
a_1      & \Cdots &      & & a_1    & \\
\Vdots  & a_2    & \Cdots & & a_2    & \\
        & & \Vdots & & \Ddots[color=red] & \\
\\
a_1      & a_2    &      & & a_n    & \\
\end{bNiceMatrix}
```



In order to represent the null matrix, one can use the following codage:

```
\begin{bNiceMatrix}
0        & \Cdots & 0        & \\
\Vdots  &        & \Vdots  & \\
0        & \Cdots & 0        & \\
\end{bNiceMatrix}
```



However, one may want a larger matrix. Usually, in such a case, the users of LaTeX add a new row and a new column. It's possible to use the same method with `nicematrix`:

⁴³The command `\iddots`, defined in `nicematrix`, is a variant of `\ddots` with dots going forward. If `mathdots` is loaded, the version of `mathdots` is used. It corresponds to the command `\adots` of `unicode-math`.

⁴⁴The precise definition of a “non-empty cell” is given below (cf. p. 64).

⁴⁵It's also possible to change the color of all these dotted lines with the option `xdots/color` (`xdots` to remind that it works for `\Cdots`, `\Ldots`, `\Vdots`, etc.): cf. p. 36.

```

\begin{bNiceMatrix}
0      & \Cdots & \Cdots & 0      & \\
\Vdots &        &        & \Vdots & \\
\Vdots &        &        & \Vdots & \\
0      & \Cdots & \Cdots & 0      & \\
\end{bNiceMatrix}

```

$$\begin{bmatrix} 0 & \cdots & \cdots & 0 \\ \vdots & & & \vdots \\ \vdots & & & \vdots \\ 0 & \cdots & \cdots & 0 \end{bmatrix}$$


In the first column of this example, there are two instructions `\Vdots` but, of course, only one dotted line is drawn.

In fact, in this example, it would be possible to draw the same matrix more easily with the following code:

```

\begin{bNiceMatrix}
0      & \Cdots & & 0      & \\
\Vdots &        & & \Vdots & \\
      &        & & \Vdots & \\
0      &        & \Cdots & 0      & \\
\end{bNiceMatrix}

```

$$\begin{bmatrix} 0 & \cdots & & 0 \\ \vdots & & & \vdots \\ & & & \vdots \\ 0 & & \cdots & 0 \end{bmatrix}$$


There are also other means to change the size of the matrix. Someone might want to use the optional argument of the command `\l` for the vertical dimension and a command `\hspace*` in a cell for the horizontal dimension.⁴⁶

However, a command `\hspace*` might interfere with the construction of the dotted lines. That's why the package `nicematrix` provides a command `\Hspace` which is a variant of `\hspace` transparent for the dotted lines of `nicematrix`.

```

\begin{bNiceMatrix}
0      & \Cdots & \Hspace*{1cm} & 0      & \\
\Vdots &        &                & \Vdots & \\
0      & \Cdots &                & 0      & \\
\end{bNiceMatrix}

```

$$\begin{bmatrix} 0 & \cdots & \hspace*{1cm} & 0 \\ \vdots & & & \vdots \\ 0 & \cdots & & 0 \end{bmatrix}$$


10.1 The option `xdots/nullify`

Consider the following matrix composed classically with the environment `{pmatrix}` of `amsmath`.

```

$A = \begin{pmatrix}
h & i & j & k & l & m \\
x & & & & & x
\end{pmatrix}$

```

$$A = \begin{pmatrix} h & i & j & k & l & m \\ x & & & & & x \end{pmatrix}$$


If we add `\ldots` instructions in the second row, the geometry of the matrix is modified.

```

$B = \begin{pmatrix}
h & i & j & k & l & m \\
x & \ldots & \ldots & \ldots & \ldots & x
\end{pmatrix}$

```

$$B = \begin{pmatrix} h & i & j & k & l & m \\ x & \dots & \dots & \dots & \dots & x \end{pmatrix}$$


By default, with `nicematrix`, if we replace `{pmatrix}` by `{pNiceMatrix}` and `\ldots` by `\Ldots`, the geometry of the matrix is not changed.

⁴⁶In `nicematrix`, one should use `\hspace*` and not `\hspace` for such an usage because `nicematrix` loads `array`. One may also remark that it's possible to fix the width of a column by using the environment `{NiceArray}` (or one of its variants) with a column of type `w` or `W`: see p. 27

```

$C = \begin{pNiceMatrix}
h & i & j & k & l & m \\
x & \Ldots & \Ldots & \Ldots & \Ldots & x
\end{pNiceMatrix}$

```

$$C = \begin{pmatrix} h & i & j & k & l & m \\ x & \dots & \dots & \dots & \dots & x \end{pmatrix}$$



However, one may prefer the geometry of the first matrix A and would like to have such a geometry with a dotted line in the second row. It's possible by using the option `xdots/nullify`⁴⁷ (and only one instruction `\Ldots` is necessary).

```

$D = \begin{pNiceMatrix}[xdots/nullify]
h & i & j & k & l & m \\
x & \Ldots & & & & x
\end{pNiceMatrix}$

```

$$D = \begin{pmatrix} h & i & j & k & l & m \\ x & \dots & & & & x \end{pmatrix}$$



The option `xdots/nullify` smashes the instructions `\Ldots` (and the variants) horizontally but also vertically.

Caution: the key `xdots/nullify` has a name that may be confusing; that key does not imply that the dotted rules won't be drawn!

10.2 The commands `\Hdotsfor` and `\Vdotsfor`

Some people commonly use the command `\hdotsfor` of `amsmath` in order to draw horizontal dotted lines in a matrix. In the environments of `nicematrix`, one should use instead `\Hdotsfor` in order to draw dotted lines similar to the other dotted lines drawn by the package `nicematrix`.

As with the other commands of `nicematrix` (like `\Cdots`, `\Ldots`, `\Vdots`, etc.), the dotted line drawn with `\Hdotsfor` extends until the contents of the cells on both sides.

```

$\begin{pNiceMatrix}
1 & 2 & 3 & 4 & 5 \\
1 & \Hdotsfor{3} & & & 5 \\
1 & 2 & 3 & 4 & 5 \\
1 & 2 & 3 & 4 & 5
\end{pNiceMatrix}$

```

$$\begin{pmatrix} 1 & 2 & 3 & 4 & 5 \\ 1 & \dots & \dots & \dots & 5 \\ 1 & 2 & 3 & 4 & 5 \\ 1 & 2 & 3 & 4 & 5 \end{pmatrix}$$



However, if these cells are empty, the dotted line extends only in the cells specified by the argument of `\Hdotsfor` (by design).

```

$\begin{pNiceMatrix}
1 & 2 & 3 & 4 & 5 \\
& \Hdotsfor{3} & & & \\
1 & 2 & 3 & 4 & 5 \\
1 & 2 & 3 & 4 & 5
\end{pNiceMatrix}$

```

$$\begin{pmatrix} 1 & 2 & 3 & 4 & 5 \\ & \dots & \dots & \dots & \\ 1 & 2 & 3 & 4 & 5 \\ 1 & 2 & 3 & 4 & 5 \end{pmatrix}$$



Remark: Unlike the command `\hdotsfor` of `amsmath`, the command `\Hdotsfor` may be used even when the package `colortbl`⁴⁸ is loaded (however, with `nicematrix`, loading `colortbl` is rather point-less since `nicematrix` provides its own coloring tools: cf. p. 20).

The package `nicematrix` also provides a command `\Vdotsfor` similar to `\Hdotsfor` but for the vertical dotted lines. The following example uses both `\Hdotsfor` and `\Vdotsfor`:

⁴⁷The key `xdots/nullify` has an alias, which is `nullify-dots`.

⁴⁸We recall that when `xcolor` is loaded with the option `table`, the package `colortbl` is loaded.

```

\begin{bNiceMatrix}
C[a_1,a_1] & \Cdots & C[a_1,a_n]
& \hspace*{20mm} & C[a_1,a_1^{(p)}] & \Cdots & C[a_1,a_n^{(p)}] \\
\Vdots & \Ddots & \Vdots
& \Hdotsfor{1} & \Vdots & \Ddots & \Vdots \\
C[a_n,a_1] & \Cdots & C[a_n,a_n]
& & C[a_n,a_1^{(p)}] & \Cdots & C[a_n,a_n^{(p)}] \\
\rule{0pt}{15mm}\NotEmpty & \Vdotsfor{1} & & \Ddots & & \Vdotsfor{1} \\
C[a_1^{(p)},a_1] & \Cdots & C[a_1^{(p)},a_n]
& & C[a_1^{(p)},a_1^{(p)}] & \Cdots & C[a_1^{(p)},a_n^{(p)}] \\
\Vdots & \Ddots & \Vdots
& \Hdotsfor{1} & \Vdots & \Ddots & \Vdots \\
C[a_n^{(p)},a_1] & \Cdots & C[a_n^{(p)},a_n]
& & C[a_n^{(p)},a_1^{(p)}] & \Cdots & C[a_n^{(p)},a_n^{(p)}] \\
\end{bNiceMatrix}

```



$$\left[\begin{array}{cccc}
C[a_1, a_1] \cdots \cdots C[a_1, a_n] & & & \\
\vdots & \ddots & & \\
C[a_n, a_1] \cdots \cdots C[a_n, a_n] & & & \\
\vdots & & & \\
C[a_1^{(p)}, a_1] \cdots \cdots C[a_1^{(p)}, a_n] & & & \\
\vdots & \ddots & & \\
C[a_n^{(p)}, a_1] \cdots \cdots C[a_n^{(p)}, a_n] & & & \\
\vdots & & & \\
C[a_1, a_1^{(p)}] \cdots \cdots C[a_1, a_n^{(p)}] & & & \\
\vdots & \ddots & & \\
C[a_n, a_1^{(p)}] \cdots \cdots C[a_n, a_n^{(p)}] & & & \\
\vdots & & & \\
C[a_1^{(p)}, a_1^{(p)}] \cdots \cdots C[a_1^{(p)}, a_n^{(p)}] & & & \\
\vdots & \ddots & & \\
C[a_n^{(p)}, a_1^{(p)}] \cdots \cdots C[a_n^{(p)}, a_n^{(p)}] & & & \\
\vdots & & & \\
\end{array} \right]$$

10.3 How to generate the continuous dotted lines transparently

Imagine you have a document with a great number of mathematical matrices with ellipsis. You may wish to use the dotted lines of `nicematrix` without having to modify the code of each matrix. It's possible with the keys `renew-dots` and `renew-matrix`.⁴⁹

- The option `renew-dots`

With this option, the commands `\ldots`, `\cdots`, `\vdots`, `\ddots`, `\iddots`⁴³ and `\hdotsfor` are redefined within the environments provided by `nicematrix` and behave like `\Ldots`, `\Cdots`, `\Vdots`, `\Ddots`, `\Iddots` and `\Hdotsfor`; the command `\dots` (“automatic dots” of `amsmath`) is also redefined to behave like `\Ldots`.

- The option `renew-matrix`

With this option, the environment `{matrix}` is redefined and behave like `{NiceMatrix}`, and so on for the five variants.

Therefore, with the keys `renew-dots` and `renew-matrix`, a classical code gives directly the output of `nicematrix`.

```

\NiceMatrixOptions{renew-dots,renew-matrix}
\begin{pmatrix}
1 & \cdots & \cdots & 1 \\
0 & \ddots & & \vdots \\
\vdots & \ddots & \ddots & \vdots \\
0 & \cdots & 0 & 1
\end{pmatrix}
\end{pmatrix}

```

$$\begin{pmatrix}
1 & \cdots & \cdots & 1 \\
0 & \ddots & & \vdots \\
\vdots & \ddots & \ddots & \vdots \\
0 & \cdots & 0 & 1
\end{pmatrix}$$



⁴⁹The options `renew-dots`, `renew-matrix` can be fixed with the command `\NiceMatrixOptions` like the other options. However, they can also be fixed as options of the command `\usepackage`.

However, one should note that the environments of `nicematrix` can't be nested, and, therefore, it's not possible to use `renew-matrix` if we have, for example, an environment `{pmatrix}` nested within another environment `{pmatrix}`.

10.4 The labels of the dotted lines

The commands `\Ldots`, `\Cdots`, `\Vdots`, `\Ddots`, `\Iddots`, `\Hdotsfor` and `\Vdotsfor` (and the command `\line` in the `\CodeAfter` which is described p. 41) accept three optional arguments specified by the tokens `_`, `^` and `:` for labels positioned below, above or on the line. The arguments are composed in math mode with `\scriptstyle`.

The label specified by “`:`” is composed on a white background which is put on the line previously drawn (see example on p. 71).

```


$$\begin{bNiceMatrix}
 1 & \hspace*{1cm} & & 0 \\
 & & \Ddots^{n \text{ times}} & \\
 0 & & & 1
 \end{bNiceMatrix}$$


```



With the key `horizontal-label`, the labels stay horizontal.

```


$$\begin{bNiceMatrix}
 1 & \hspace*{1cm} & & 0 \\
 & & \Ddots[horizontal-label]^{n \text{ times}} & \\
 0 & & & 1
 \end{bNiceMatrix}$$


```



10.5 Customisation of the dotted lines

The dotted lines drawn by `\Ldots`, `\Cdots`, `\Vdots`, `\Ddots`, `\Iddots`, `\Hdotsfor` and `\Vdotsfor` (and by the command `\line` in the `\CodeAfter` which is described p. 41) may be customized by the following options (specified between square brackets after the command):

- `nullify`;
- `horizontal-label(s)`;
- `color`;
- `radius`;
- `shorten-start+`, `shorten-end+` and `shorten+`;
- `inter`;
- `line-style`.

For an individual command, it's possible to write `horizontal-label` (in the singular).

These options may also be fixed with `\NiceMatrixOptions`, as options of `\CodeAfter` or at the level of a given environment but, in those cases, they must be prefixed by `xdots` (`xdots` to remind that it works for `\Cdots`, `\Ldots`, `\Vdots`, etc.), and, thus have for names:

- `xdots/nullify`;
- `xdots/horizontal-labels`;
- `xdots/color`;
- `xdots/radius`;
- `xdots/shorten-start+`, `xdots/shorten-end+` and `xdots/shorten+`;

- `xdots/inter`;
- `xdots/line-style`.

For the clarity of the explanations, we will use those names.

With the key `xdots/horizontal-labels`, the labels (introduced by `_`, `^` and `:`) stay horizontal.

The key `xdots/nullify` has yet been described in the part 10.1, p. 33.

The option `xdots/color` fixes the color of the dotted line. It's possible to use a color defined "on the fly" (e.g.: `xdots/color = { [RGB]{204,204,255} }`). One should remark that the dotted lines drawn in the exterior rows and columns have a special treatment: cf. p. 30.

The option `xdots/radius` fixes the radius of the dots. The initial value is 0.53 pt.

The keys `xdots/shorten-start`⁺ and `xdots/shorten-end`⁺ fix the margin at the extremities of the line. The key `xdots/shorten`⁺ fixes both parameters. The initial value is 0.3 em.⁵⁰

These keys have a normal syntax but also a "additive" syntax. That means that it's possible to write, for example, `xdots/shorten = 0.6em` but also `xdots/shorten += 3pt` (and we remind that the initial value is *not* zero!).

The option `xdots/inter` fixes the length between the dots. The initial value is 0.45 em (it is recommended to use a unit of length dependent of the current font).

The option `xdots/line-style`

It should be pointed that, by default, the lines drawn by TikZ with the parameter `dotted` are composed of square dots (and not rounded ones).⁵¹

```
\tikz \draw [dotted] (0,0) -- (5,0) ;
```

In order to provide lines with rounded dots in the style of those provided by `\ldots` (at least with the *Computer Modern* fonts), the package `nicematrix` embeds its own system to draw a dotted line (and this system uses PGF and not TikZ). This style is called `standard` and that's the initial value of the parameter `xdots/line-style`.

However (when TikZ is loaded) it's possible to use for `xdots/line-style` any style provided by TikZ, that is to say any sequence of options provided by TikZ for the TikZ paths (with the exception of "color", "shorten >" and "shorten <").

Here is for example a tridiagonal matrix with the style `loosely dotted`:

```
\[ \begin{pNiceMatrix}[xdots={nullify, shorten += 2pt, line-style = loosely dotted}]
a & b & & 0 & & & & \Cdots & 0 & & \\
b & & a & & b & & & \Ddots & & & \Vdots & \\
0 & & b & & a & & & \Ddots & & & & \\
& & & \Ddots & & \Ddots & & \Ddots & & & 0 & \\
\Vdots & & & & & & & & & & b & \\
0 & & \Cdots & & & & 0 & & b & & a & \\
\end{pNiceMatrix} \$
```



⁵⁰In fact, when `xdots/shorten`, `xdots/shorten-start` and `xdots/shorten-end` are used in `\NiceMatrixOptions` or at the level of an environment (such as `{pNiceMatrix}`), those keys only apply to the extremities of dotted lines corresponding to a non-empty content of a cell. When they are used for a command such as `\Cdots` (and, in that case, their names are `shorten`, `shorten-start` and `shorten-end`), they apply to all the extremities.

⁵¹The first reason of this behaviour is that the PDF format includes a description for dashed lines. The lines specified with this descriptor are displayed very efficiently by the PDF readers. It's easy, starting from these dashed lines, to create a line composed by square dots whereas a line of rounded dots needs a specification of each dot in the PDF file. Nevertheless, you can have a look at the following page to see how to have dotted rules with rounded dots in TikZ: <https://tex.stackexchange.com/questions/52848/tikz-line-with-large-dots>

$$\begin{pmatrix} a & b & 0 & \dots & 0 \\ b & a & b & & \\ 0 & b & a & & \\ \vdots & & & \ddots & \\ 0 & \dots & 0 & b & a \end{pmatrix}$$

10.6 The dotted lines and the rules

The dotted lines determine virtual blocks which have the same behaviour regarding the rules (the rules specified by the specifier `|` in the preamble, by the command `\Hline`, by the keys `hlines`, `vlines`, `hvlines` and `hvlines-except-borders` and by the tools created by `custom-line` are not drawn within the blocks).⁵²

```
\begin{bNiceMatrix}[margin,hvlines]
\Block{3-3}<\LARGE>{A} & & 0 \\
& \hspace*{1cm} & & \Vdots \\
& & 0 \\
0 & \Cdots & 0 & 0 \\
\end{bNiceMatrix}
```

$$\left[\begin{array}{c|c} A & \begin{array}{c} 0 \\ \vdots \\ 0 \end{array} \\ \hline 0 \dots \dots \dots 0 & 0 \end{array} \right]$$



10.7 The commands `\Hbrace` and `\Vbrace`

Since, as said in the previous part, it's possible to use, with the commands `\Cdots`, `\Ldots`, `\Vdots`, etc. all the styles of lines provided by TikZ, one may wish to use those commands to draw braces with the decoration `brace` provided by the library `decorations.pathreplacing` of TikZ.

In order to facilitate that use, `nicematrix` provides two commands `\Hbrace` and `\Vbrace`. Those commands are available only if TikZ has been loaded with its library `decorations.pathreplacing` (before or after the loading of `nicematrix`). Otherwise, a (non-fatal) error will be raised.

```
\usepackage{tikz}
\usetikzlibrary{decorations.pathreplacing}
```

The commands `\Hbrace` and `\Vbrace` have the same syntax. Both commands take in three arguments:

- an optional argument, between square brackets, which contains a list of `key=value` pairs: the keys allowed are `color`, `horizontal-labels`, `shorten`, `shorten-start` and `shorten-end`.

New 7.5

A key `brace-shift`⁺ is also provided to shift the brace (and its label) towards the exterior of the matrix. That key has a normal syntax but also an “additive” syntax, which means that it's possible to write, for example, `brace-shift = 3pt` but also `brace-shift += 1pt`.

- a mandatory argument which is the number of columns (for `\Hbrace`) or the number of rows (for `\Vbrace`) over which the command applies;
- an mandatory argument which is the label of the curly brace.

As regards the ampersands (`&`), `\Hbrace` has the same behavior as the commands `\multicolumn`, `\hdotsfor`, `\Hdotsfor` (provided by `nicematrix`), etc.: only one ampersand must be inserted, even if the brace that will be drawn will extend on several columns.

```
\usepackage{tikz} % in the preamble
\usetikzlibrary{decorations.pathreplacing} % in the preamble
```

⁵²On the other side, the command `\line` in the `\CodeAfter` (cf. p. 41) does *not* create block.

```

 $\begin{NiceArray}{cccccc}%
  [ hvlines ,
    first-row ,
    last-row = 6,
    first-col ,
    last-col ,
    xdots/horizontal-labels ]
& \Hbrace{3}{p} & \Hbrace[brace-shift=1mm]{2}{q} \\
\Vbrace{3}{p} & 1 & 1 & 134 & 1 & 1 & \Vbrace{3}{p} \\
& 1 & 1 & 134 & 1 & 1 & \\
& 1 & 1 & 13456 & 1 & 1 & \\
\Vbrace{2}{q} & 1 & 1 & 134 & 1 & 1 & \Vbrace{2}{q} \\
& 1 & 1 & 134 & 1 & 1 & \\
& \Hbrace{3}{p} & \Hbrace[color=blue]{2}{q} \\
\end{NiceArray}$ 

```

	p			q			
p	1	1	134	1	1	}	
	1	1	134	1	1		}
	1	1	13456	1	1		
q	1	1	134	1	1	}	
	1	1	134	1	1		
	p			q			



The TikZ style used by `nicematrix` to draw those braces is called `nicematrix/brace`. Here is the initial value of that style:

```

decoration = { brace , raise = -0.15 em } ,
decorate

```

The final user can change that style TikZ as he wishes (respecting the structure with the keys `decorate` and `decoration`).

For another example of use of `\Hbrace` and `\Vbrace`, see the section “Dotted lines that are no longer dotted”, p. 70.

It’s also possible to draw braces of the mathematical mode of LaTeX by using the commands `\OverBrace` and `\UnderBrace` (cf. 12.3 p. 44) and the command `\SubMatrix` (cf. 12.2 p. 41) in the `\CodeAfter`.

11 Delimiters in the preamble of the environment

In the environments with preamble (`{NiceArray}`, `{pNiceArray}`, etc.), it’s possible to put vertical delimiters directly in the preamble of the environment.⁵³

The opening delimiters should be prefixed by the keyword `\left` and the closing delimiters by the keyword `\right`. It’s not mandatory to use `\left` and `\right` pair-wise.

All the vertical extensible delimiters of LaTeX are allowed.

Here is a example which uses the delimiters `\lgroup` and `\rgroup`.

```

 $\begin{NiceArray}{\left\lgroup ccc\right\rgroup 1}
1 & 2 & 3 & \\
4 & 1 & 6 & \\
7 & 8 & 9 & \scriptstyle L_3 \text{ gets } L_3 + L_1 + L_2 \\
\end{NiceArray}$ 

```



$$\left(\begin{array}{ccc} 1 & 2 & 3 \\ 4 & 1 & 6 \\ 7 & 8 & 9 \end{array} \right)_{L_3 \leftarrow L_3 + L_1 + L_2}$$

For this example, it would also have been possible to use the environment `{NiceArrayWithDelims}` (cf. the section 14.11, p. 56) and the key `last-col` (cf. p. 30).

⁵³This syntax is inspired by the extension `blkarray`.

There is a particular case: for the delimiters `(`, `[` and `\{`⁵⁴, and the corresponding closing delimiters, the prefixes `\left` et `\right` are optional.⁵⁵

Here is an example with a left delimiter `\{` in a `{NiceTabular}` (remark the compatibility with the key `t`).

```
We define $f$ with\quad
\begin{NiceTabular}[t]{\{11}
$f(x) = 0$ & if $x$ is non positive \\
$f(x) = 1-e^{-x}$ & if $x$ is positive
```

$$\text{On définit } f \text{ par } \begin{cases} f(x) = 0 & \text{if } x \text{ is non positive} \\ f(x) = 1 - e^{-x} & \text{if } x \text{ is positive} \end{cases}$$

When there are two successive delimiters (necessarily a closing one following by an opening one for another submatrix), a space equal to `\enskip` is automatically inserted.

```
\begin{pNiceArray}{(c)(c)(c)}
a_{11} & a_{12} & & a_{13} \\
a_{21} & \displaystyle \int_0^1 \frac{1}{x^2+1} dx & a_{23} \\
a_{31} & a_{32} & a_{33}
```



$$\begin{pmatrix} a_{11} \\ a_{21} \\ a_{31} \end{pmatrix} \begin{pmatrix} a_{12} & \int_0^1 \frac{1}{x^2+1} dx \\ a_{32} \end{pmatrix} \begin{pmatrix} a_{13} \\ a_{23} \\ a_{33} \end{pmatrix}$$

For more complex constructions, in particular with delimiters spanning only a *subset* of the rows of the array, one should consider the command `\SubMatrix` available in the `\CodeAfter` (and the `\CodeBefore`). See the section 12.2, p. 41.

12 The `\CodeAfter`

The option `code-after` may be used to give some code that will be executed *after* the construction of the matrix.⁵⁶

For the legibility of the code, an alternative syntax is provided: it's possible to give the instructions of the `code-after` at the end of the environment, after the keyword `\CodeAfter` (the key `code-after` is of course mandatory in the `\AutoNiceMatrix` and the similar commands). Although `\CodeAfter` is a keyword, it takes in an optional argument (between square brackets).⁵⁷

The experienced users may, for instance, use the PGF/TikZ nodes created by `nicematrix` in the `\CodeAfter`. These nodes are described further beginning on p. 57.

The `\CodeAfter` provides several special commands: `\line`, `\SubMatrix`, `\OverBrace`, `\UnderBrace` and `\TikzEveryCell`. We will now present these commands.

One should avoid spurious spaces in that `\CodeAfter`.⁵⁸

⁵⁴For the braces, the protection by a backslash is mandatory (that's why we have written `\{`).

⁵⁵For the delimiters `[` and `]`, the prefixes remain mandatory when there is a conflict of notation with the square brackets for the options of some descriptors of columns.

⁵⁶There is also a key `code-before` described p. 20.

⁵⁷Here are the keys accepted in that argument: `delimiters/color`, `rules` and its sub-keys, `sub-matrix` (linked to the command `\SubMatrix`) and its sub-keys and `xdots` (for the command `\line`) and its sub-keys.

⁵⁸See: <https://tex.stackexchange.com/questions/689336>

12.1 The command `\line` in the `\CodeAfter`

The command `\line` draws directly dotted lines between cells or blocks. It takes in two arguments for the cells or blocks to link. Both argument may be:

- a specification of cell of the form i - j where i is the number of the row and j is the number of the column;
- the name of a block (created by the command `\Block` with the key `name` of that command).

The options available for the customisation of the dotted lines created by `\Cdots`, `\Vdots`, etc. are also available for this command (cf. p. 36).

This command may be used, for example, to draw a dotted line between two adjacent cells.

```
\NiceMatrixOptions{xdots/shorten += 0.3 em}
\begin{pNiceMatrix}
I      & 0      & & \Cdots & 0      & \\
0      & I      & & \Ddots & & \Vdots \\
\Vdots & & \Ddots & & I      & 0      & \\
0      & & & \Cdots & 0      & & I
\CodeAfter \line{2-2}{3-3}
\end{pNiceMatrix}
```

$$\begin{pmatrix} I & 0 & \cdots & 0 \\ 0 & I & & \vdots \\ \vdots & & \ddots & I & 0 \\ 0 & \cdots & 0 & I \end{pmatrix}$$



It can also be used to draw a diagonal line not parallel to the other diagonal lines (by default, the dotted lines drawn by `\Ddots` are “parallelized”: cf. p. 63).

```
\begin{bNiceMatrix}
1      & & \Cdots & & & 1      & & 2      & & \Cdots & & & 2      & \\
0      & & \Ddots & & & \Vdots & & \Vdots & & \hspace*{2.5cm} & & & \Vdots & \\
\Vdots & & \Ddots & & & & & & & & & & & \\
0      & & \Cdots & & 0 & 1      & & 2      & & \Cdots & & & 2      & \\
\CodeAfter \line[shorten=6pt]{1-5}{4-7}
\end{bNiceMatrix}
```

$$\left[\begin{array}{cccccc} 1 & \cdots & 1 & 2 & \cdots & 2 \\ 0 & & \vdots & & & \vdots \\ \vdots & & \ddots & & & \vdots \\ 0 & \cdots & 0 & 1 & 2 & \cdots & 2 \end{array} \right]$$



12.2 The command `\SubMatrix` in the `\CodeAfter` (and the `\CodeBefore`)

The command `\SubMatrix` provides a way to put delimiters on a portion of the array considered as a submatrix. The command `\SubMatrix` takes in five arguments:

- the first argument is the left delimiter, which may be any extensible delimiter provided by LaTeX : (, [, \{, \langle, \lgroup, \lfloor, etc. but also the null delimiter .;
- the second argument is the upper-left corner of the submatrix with the syntax i - j where i the number of row and j the number of column (the special word `last` is allowed);
- the third argument is the lower-right corner with the same syntax;
- the fourth argument is the right delimiter;
- the last argument, which is optional, is a list of `key=value` pairs.⁵⁹

⁵⁹There is no optional argument between square brackets in first position because a square bracket just after `\SubMatrix` must be interpreted as the first (mandatory) argument of the command `\SubMatrix`: that bracket is the left delimiter of the sub-matrix to construct (eg.: `\SubMatrix[{-2-}{4-7}]`).

One should remark that the command `\SubMatrix` draws the delimiters *after* the construction of the array: no space is inserted by the command `\SubMatrix` itself. That's why, in the following example, we have used the key `margin` and you have added by hand some space between the third and fourth column with `@{\hspace{1.5em}}` in the preamble of the array.

```
\[\begin{NiceArray}{ccc@{\hspace{1.5em}}c}[cell-space-limits += 2pt,margin]
1 & 1 & 1 & x \\
\frac{1}{4} & \frac{1}{2} & \frac{1}{4} & y \\
1 & 2 & 3 & z \\
\CodeAfter
\SubMatrix({1-1}{3-3})
\SubMatrix({1-4}{3-4})
\end{NiceArray}\]
```

$$\begin{pmatrix} 1 & 1 & 1 \\ \frac{1}{4} & \frac{1}{2} & \frac{1}{4} \\ 1 & 2 & 3 \end{pmatrix} \begin{pmatrix} x \\ y \\ z \end{pmatrix}$$


Eventually, in this example, it would probably have been easier to put the delimiters directly in the preamble of `{NiceArray}` (see section 11, p. 39) with the following construction.

```
$$\begin{NiceArray}{(ccc)(c)}[cell-space-limits += 2pt]
1 & 1 & 1 & x \\
\frac{1}{4} & \frac{1}{2} & \frac{1}{4} & y \\
1 & 2 & 3 & z \\
\end{NiceArray}$$
```

$$\begin{pmatrix} 1 & 1 & 1 \\ \frac{1}{4} & \frac{1}{2} & \frac{1}{4} \\ 1 & 2 & 3 \end{pmatrix} \begin{pmatrix} x \\ y \\ z \end{pmatrix}$$


In fact, the command `\SubMatrix` also takes in two optional arguments specified by the traditional symbols `^` and `_` for material in superscript and subscript (but no space is reserved for that material and that's why, in the following example, you have used the key `right-margin`).

```
$$\begin{bNiceMatrix}[right-margin=1em]
1 & 1 & 1 \\
1 & a & b \\
1 & c & d \\
\CodeAfter
\SubMatrix[{{2-2}{3-3}}^T]
\end{bNiceMatrix}$$
```

$$\begin{bmatrix} 1 & 1 & 1 \\ 1 & a & b \\ 1 & c & d \end{bmatrix}^T$$


The options of the command `\SubMatrix` are as follows:

- `left-xshift` and `right-xshift` shift horizontally the delimiters (there exists also the key `xshift` which fixes both parameters);
- `extra-height` adds a quantity to the total height of the delimiters (height `\ht` + depth `\dp`);
- `delimiters/color` fixes the color of the delimiters (also available in `\NiceMatrixOptions`, in the environments with delimiters and as option of the keyword `\CodeAfter`);
- `slim` is a boolean key: when that key is in force, the horizontal position of the delimiters is computed by using only the contents of the cells of the submatrix whereas, in the general case, the position is computed by taking into account the cells of the whole columns implied in the submatrix (see example below). ;
- `vlines` contents a list of numbers of vertical rules that will be drawn in the sub-matrix (if this key is used without value, all the vertical rules of the sub-matrix are drawn);
- `hlines` is similar to `vlines` but for the horizontal rules;
- `hvlines`, which must be used without value, draws all the vertical and horizontal rules;
- `code` insert code, especially TikZ code, after the construction of the submatrix. That key is detailed below.

inserted by that code, the nodes of the form `i-j.anchor` or `i-|j` are interpreted with `i` and `j` as numbers of row and column *relative to the submatrix*.⁶⁰

```

 $\begin{NiceArray}{ccc@{}w{c}{5mm}@{}ccc}
& & & -1 & 1 & 2 & \\
& & & 0 & 3 & 4 & \\
& & & 0 & 0 & 5 & \\
1 & 2 & 3 & -1 & 7 & 25 & \\
0 & 4 & 5 & 0 & 12 & 41 & \\
0 & 0 & 6 & 0 & 0 & 30 & \\
\CodeAfter
\NewDocumentCommand{\MyDraw}{-|}{\tikz \draw [blue] (2-|1) -| (3-|2) -|
(4-|3) ;}
\SubMatrix({1-5}{3-7})[code = \MyDraw ]
\SubMatrix({4-1}{6-3})[code = \MyDraw ]
\SubMatrix({4-5}{6-7})[code = \MyDraw ]
\end{NiceArray}$ 

```



$$\begin{pmatrix} 1 & 2 & 3 \\ 0 & 4 & 5 \\ 0 & 0 & 6 \end{pmatrix} \begin{pmatrix} -1 & 1 & 2 \\ 0 & 3 & 4 \\ 0 & 0 & 5 \end{pmatrix} \begin{pmatrix} -1 & 7 & 25 \\ 0 & 12 & 41 \\ 0 & 0 & 30 \end{pmatrix}$$

As we see, the drawing done by our command `\MyDraw` is *relative* to the submatrix to which it is applied.

12.3 The commands `\OverBrace` and `\UnderBrace` in the `\CodeAfter`

The commands `\OverBrace` and `\UnderBrace` provide a way to put horizontal braces on a part of the array. These commands take in three arguments:

- the first argument is the upper-left corner of the submatrix with the syntax `i-j` where `i` the number of row and `j` the number of column;
- the second argument is the lower-right corner with the same syntax;
- the third argument is the label of the brace that will be put by `nicematrix` (with `PGF`) above the brace (for the command `\OverBrace`) or under the brace (for `\UnderBrace`).

It's possible to use the command `\\` in this third argument in order to format the label on several lines.

```

\begin{pNiceMatrix}
1 & 2 & 3 & 4 & 5 & 6 & \\
11 & 12 & 13 & 14 & 15 & 16 & \\
\CodeAfter
\OverBrace{1-1}{2-3}{A}
\OverBrace{1-4}{2-6}{B}
\end{pNiceMatrix}

```

$$\begin{pmatrix} 1 & 2 & 3 & 4 & 5 & 6 \\ 11 & 12 & 13 & 14 & 15 & 16 \end{pmatrix}$$



Caution: There is no vertical space reserved for those braces and their labels.⁶¹

In fact, the commands `\OverBrace` and `\UnderBrace` take in an optional argument (in first position and between square brackets) for a list of `key=value` pairs. The available keys are:

⁶⁰Be careful: the syntax `j|-i` is *not* allowed.


⁶¹See: <https://tex.stackexchange.com/questions/685755>

- `left-shorten` and `right-shorten` which do not take in value; when the key `left-shorten` is used, the abscissa of the left extremity of the brace is computed with the contents of the cells of the involved sub-array, otherwise, the position of the potential vertical rule is used (idem for `right-shorten`).
- `shorten`, which is the conjunction of the keys `left-shorten` and `right-shorten`;
- `yshift`, which shifts vertically the brace (and its label);
- `color`, which sets the color of the brace (and its label).

```

\begin{pNiceMatrix}
1 & 2 & 3 & 4 & 5 & 6 \\
11 & 12 & 13 & 14 & 15 & 16 \\
\CodeAfter
  \OverBrace[shorten,yshift=3pt]{1-1}{2-3}{A}
  \OverBrace[shorten,yshift=3pt]{1-4}{2-6}{B}
\end{pNiceMatrix}

```




▷ The commands `\OverBrace` and `\UnderBrace` use the standard braces of the mathematical mode of LaTeX on which they are based. However, `nicematrix` provides also a command `\Hbrace` which should be used directly in the tabular and which draws braces of TikZ (cf. part. 10.7, p. 38).

12.4 The command `\TikzEveryCell` in the `\CodeAfter`


The command `\TikzEveryCell` executes with TikZ the rectangular path corresponding to each cell of the tabular with parameters of TikZ the argument of `\TikzEveryCell`. That argument must be a list of `key=value` pairs which may be applied to a TikZ path. In fact, the command applies to each of the tabular, except those in the exterior rows and columns (cf. p. 30) and those in the empty corners (when the key `corners` is used: cf. p. 15). It applies in fact to each block (excepted those with the key `transparent`) and does not apply to the individual cells located within these blocks.

In fact, in the list of keys provided as argument of `\TikzEveryCell`, it's possible to put a key `offset`. That key is not provided by TikZ but by `nicematrix`. It will narrow the rectangular frame corresponding to the block by a margin (horizontally and vertically) equal to the value (of that key `offset`). That new frame, a bit narrower, will be executed by TikZ with options which are the other keys in the argument of `\TikzEveryCell`.

```

\renewcommand{\arraystretch}{1.3}
\begin{NiceTabular}{ccc}[corners]
  & \Block{1-2}{columns} \\
  \Block{2-1}{rows}
  & cell 1 1 & cell 1 2 \\
  & cell 2 1 & cell 2 2
\CodeAfter
  \TikzEveryCell[offset=1pt,draw]
\end{NiceTabular}

```




The command `\TikzEveryCell` has two optional keys, available between square brackets.

- with the key `empty`, the command only acts on the empty cells (the exact definition of an “empty cell” is given in part 17.2, p. 64);
- with key `non-empty`, the command only acts on the non-empty cells.

```

\renewcommand{\arraystretch}{1.4}
\begin{NiceTabular}{cccccc}[hvlines]
  P & O & U & R & V & U \\
  O & & & E & I & \\
  M & O & R & F & A & L \\
  E & T & A & L & & E \\
  L & A & S & E & R & S \\
  O & & E & X & I & T
\CodeAfter
  \TikzEveryCell[empty]{fill=gray,draw}
\end{NiceTabular}

```

P	O	U	R	V	U
O			E	I	
M	O	R	F	A	L
E	T	A	L		E
L	A	S	E	R	S
O		E	X	I	T



The command `\TikzEveryCell` is, in fact, also available in the `\CodeBefore`.

13 Captions and notes in the tabulars

13.1 Caption of a tabular

The environment `{NiceTabular}` provides the keys `caption`, `short-caption` and `label` which may be used when the tabular is inserted in a floating environment (typically the environment `{table}`).

With the key `caption`, the caption, when it is long, is wrapped at the width of the tabular (except the potential exterior columns specified by `first-col` and `last-col`: cf. 9, p. 30), without the use of the package `threeparttable` or the package `floatrow`.

By default, the caption is composed below the tabular. With the key `caption-above`, available in `\NiceMatrixOptions`, the caption will be composed above the tabular (that key is not available for an individual environment).

The key `short-caption` corresponds to the optional argument of the classical command `\caption` and the key `label` corresponds, of course, to the command `\label`.

See table 1, p. 49, for an example of use the keys `caption` and `label`.

These functionalities are compatible with the extension `caption`. For example, it's possible to use the tuning `\captionsetup{justification=raggedright,singlelinecheck=false}` in order to have left-align captions, even when the caption is shorter than the tabular.

13.2 The footnotes

The package `nicematrix` allows, by using `footnote` or `footnotehyper`, the extraction of the notes inserted by `\footnote` in the environments of `nicematrix` and their composition in the foot of the page with the other notes of the document.

If `nicematrix` is loaded with the option `footnote` (with `\usepackage[footnote]{nicematrix}` or with `\PassOptionsToPackage`), the package `footnote` is loaded (if it is not yet loaded) and it is used to extract the footnotes.

If `nicematrix` is loaded with the option `footnotehyper`, the package `footnotehyper` is loaded (if it is not yet loaded) and it is used to extract footnotes.

Caution: The packages `footnote` and `footnotehyper` are incompatible. The package `footnotehyper` is the successor of the package `footnote` and should be used preferently. The package `footnote` has some drawbacks, in particular: it must be loaded after the package `xcolor` and it is not perfectly compatible with `hyperref`.

13.3 The notes of tabular

The package `nicematrix` also provides a command `\tabularnote` which gives the ability to specify notes that will be composed at the end of the array with a width of text equal to the width of the array

(except the potential exterior columns specified by `first-col` and `last-col`: cf. 9, p. 30). With no surprise, that command is available only in the environments `{NiceTabular}`, `{NiceTabular*}` and `{NiceTabularX}`.

In fact, this command is available only if the extension `enumitem` has been loaded (before or after `nicematrix`). Indeed, the notes are composed at the end of the array with a type of list provided by the package `enumitem`. If `enumitem` has not been loaded, an error will be raised.

```
\begin{NiceTabular}{@{}llr@{}}
\toprule \RowStyle{\bfseries}
Last name & First name & Birth day \\
\midrule
Achard\tabularnote{Achard is an old family of the Poitou.}
& Jacques & June 5, 2005 \\
Lefebvre\tabularnote{The name Lefebvre is an alteration of the name Lefebure.}
& Mathilde & January 23, 1975 \\
Vanesse & Stephany & October 30, 1994 \\
Dupont & Chantal & January 15, 1998 \\
\bottomrule
\end{NiceTabular}
```



Last name	First name	Birth day
Achard ^a	Jacques	June 5, 2005
Lefebvre ^b	Mathilde	January 23, 1975
Vanesse	Stephany	October 30, 1994
Dupont	Chantal	January 15, 1998

^a Achard is an old family of the Poitou.

^b The name Lefebvre is an alteration of the name Lefebure.

- If you have several successive commands `\tabularnote{...}` with no space at all between them, the labels of the corresponding notes are composed together, separated by commas (this is similar to the option `multiple` of `footmisc` for the footnotes).
- If a command `\tabularnote{...}` is exactly at the end of a cell (with no space at all after) and if the alignment mode of the column is `c` or `r`, the label of the note is composed in an overlapping position (towards the right). This structure may provide a better alignment of the cells of a given column.
- If the key `notes/para` is used, the notes are composed at the end of the array in a single paragraph (as with the key `para` of `threeparttable`).
- There is a key `tabularnote` which provides a way to insert some text in the zone of the notes before the numbered tabular notes.

An alternative syntax is available with the environment `{TabularNote}`. That environment should be used at the end of the environment `{NiceTabular}` (but *before* a potential instruction `\CodeAfter`).

- If the package `booktabs` has been loaded (before or after `nicematrix`), the key `notes/bottomrule` draws a `\bottomrule` of `booktabs` *after* the notes.
- The command `\tabularnote` may be used *before* the environment of `nicematrix`. Thus, it's possible to use it on the title inserted by `\caption` in an environment `{table}` of LaTeX (or in a command `\captionof` of the package `caption`). It's also possible, as expected, to use the command `\tabularnote` in the caption provided by the *key* `caption` of the environment `{NiceTabular}`.

If several commands `\tabularnote` are used in a tabular with the same argument, only one note is inserted at the end of the tabular (but all the labels are composed, of course). It's possible to control that feature with the key `notes/detect-duplicates`.⁶²

- It's possible to create a reference to a tabular note created by `\tabularnote` (with the usual command `\label` used after the `\tabularnote`).
- The command `\tabularnote` has an optional argument (between square brackets) to change the symbol of the reference of the note.

Example: `\tabularnote[\star]{A footnote...}`

For an illustration of some of those remarks, see table 1, p. 49. This table has been composed with the following code (the package `caption` has been loaded in this document).

```
\begin{table}
\centering
\NiceMatrixOptions{caption-above}
\begin{NiceTabular}{@{}llc@{}}
[
caption = A tabular whose caption has been specified by the key
\texttt{caption}\tabularnote[$\star$]{It's possible to put a tabular
note in the caption.} ,
label = t:tabularnote ,
tabularnote = Some text before the notes. ,
notes/bottomrule
]
\toprule
Last name & First name & Length of life \\
\midrule
Churchill & Wiston & 91\\
Nightingale\tabularnote{Considered as the first nurse of history}%
\tabularnote[Nicknamed ``the Lady with the Lamp''.]
& Florence\tabularnote{This note is shared by two references.} & 90 \\
Schoelcher & Victor & 89\tabularnote{The label of the note is overlapping.}\\
Touchet & Marie\tabularnote{This note is shared by two references.} & 89 \\
Wallis & John & 87 \\
\bottomrule
\end{NiceTabular}
\end{table}
```



13.4 Customisation of the tabular notes

The tabular notes can be customized with a set of keys available in `\NiceMatrixOptions`. The name of these keys is prefixed by `notes`.

- `notes/para`
- `notes/bottomrule`
- `notes/style`
- `notes/label-in-tabular`
- `notes/label-in-list`
- `notes/enumitem-keys`
- `notes/enumitem-keys-para`

⁶²For technical reasons, the final user is not allowed to put several commands `\tabularnote` with exactly the same argument in the caption of the tabular. It's not a real restriction...

Table 1: A tabular whose caption has been specified by the key `caption*`

Last name	First name	Length of life
Churchill	Wiston	91
Nightingale ^{a,b}	Florence ^c	90
Schoelcher	Victor	89 ^d
Touchet	Marie ^c	89
Wallis	John	87

Some text before the notes.

* It's possible to put a tabular note in the caption

^a Considered as the first nurse of history.

^b Nicknamed “the Lady with the Lamp”.

^c This note is shared by two references.

^d The label of the note is overlapping.

- `notes/code-before`
- `notex/no-print`

For sake of commodity, it is also possible to set these keys in `\NiceMatrixOptions` via a key `notes` which takes in as value a list of pairs `key=value` where the name of the keys need no longer be prefixed by `notes`:

```

\NiceMatrixOptions
{
  notes =
  {
    bottomrule ,
    style = ... ,
    label-in-tabular = ... ,
    enumitem-keys =
    {
      labelsep = ... ,
      align = ... ,
      ...
    }
  }
}

```

We detail these keys.

- The key `notes/para` requires the composition of the notes (at the end of the tabular) in a single paragraph.
Initial value: `false`
That key is also available within a given environment.
- The key `notes/bottomrule` adds a `\bottomrule` of `booktabs` *after* the notes. Of course, that rule is drawn only if there is really notes in the tabular. The package `booktabs` must have been loaded (before or after the package `nicematrix`). If it is not, an error is raised.
Initial value: `false`
That key is also available within a given environment.
- The key `notes/style` is a command whose argument is specified by `#1` and which gives the style of numerotation of the notes. That style will be used by `\ref` when referencing a tabular note marked with a command `\label`. The labels formatted by that style are used, separated

by commas, when the user puts several consecutive commands `\tabularnote`. The marker `#1` is meant to be the name of a LaTeX counter.

Initial value: `\textit{\alph{#1}}`

Another possible value should be a mere `\arabic{#1}`

- The key `notes/label-in-tabular` is a command whose argument is specified by `#1` which is used when formatting the label of a note in the tabular. Internally, this number of note has already been formatted by `notes/style` before sent to that command.

Initial value: `#1`

In French, it's a tradition of putting a small space before the label of note. That tuning could be achieved by the following code:

```
\NiceMatrixOptions{notes/label-in-tabular = \,\textsuperscript{~#1}}
```

- The key `notes/label-in-list` is a command whose argument is specified by `#1` which is used when formatting the label in the list of notes at the end of the tabular. Internally, this number of note has already been formatted by `notes/style` before sent to that command.

Initial value: `#1`

In French, the labels of notes are not composed in upper position when composing the notes. Such behaviour could be achieved by:

```
\NiceMatrixOptions{notes/label-in-list = ~#1.\nobreak\hspace{0.25em}}
```

The command `\nobreak` is for the event that the option `para` is used.

- The notes are composed at the end of the tabular by using internally a style of list of `enumitem`. This style of list is defined as follows (with, of course, keys of `enumitem`):

```
noitemsep , leftmargin = * , align = left , labelsep = 0pt
```

The specification `align = left` in that style requires a composition of the label leftwards in the box affected to that label. With that tuning, the notes are composed flush left, which is pleasant when composing tabulars in the spirit of `booktabs` (see for example the table 1, p. 49).

The key `notes/enumitem-keys` specifies a list of pairs `key=value` (following the specifications of `enumitem`) to customize that style of list (it uses internally the command `\setlist*` of `enumitem`).

- The key `notes/enumitem-keys-para` is similar to the previous one but corresponds to the type of list used when the option `para` is in force. Of course, when the option `para` is used, a list of type `inline` (as called by `enumitem`) is used and the pairs `key=value` should correspond to such a list of type `inline`.

Initially, the style of list is defined by: `afterlabel = \nobreak, itemjoin = \quad`

- The key `notes/code-before`⁺ is a token list inserted by `nicematrix` just before the composition of the notes at the end of the tabular.

Initial value: `empty`

For example, if one wishes to compose all the notes in gray and `\footnotesize`, he should use that key:

```
\NiceMatrixOptions{notes/code-before = \footnotesize \color{gray}}
```

It's also possible to add `\raggedright` or `\RaggedRight` in that key (`\RaggedRight` is a command of `ragged2e`).

The key `notes/code-before` has a normal syntax, but also a “additive syntax”, which means that it's possible to write, for example `notes/code-before += \footnotesize`. With that syntax, the tokens are appended on the *right* of the current value of the parameter `notes/code-before`.

- The key `notes/detect-duplicates` activates the detection of the commands `\tabularnotes` with the same argument.

Initial value: `true`

- **New 7.7**

When the key `notes/no-print` is in force, the notes are *not* composed by `nicematrix` under the `tabular`. However, the final user may use the command `\NiceTabularNotes` in order to insert these notes where he wishes (after the composition of the `tabular`).

Initial value: `false`

For an example of customisation of the tabular notes, see p. 66.

14 Other features

14.1 Trees

New 7.8

The key `draw-trees-in-col` takes in as argument a list of numbers of columns and, in each of those columns, will draw a tree in the style the trees drawn by the package `dirtree`.

```
\usepackage{booktabs} % in the preamble

\renewcommand{\arraystretch}{1.3}
\begin{NiceTabular}{w{1}{2.5mm}w{1}{2.5mm}lr}[draw-trees-in-col=1-2]
\toprule
Category &&& \% \\
\midrule
Animal &&& 100 \\
&& Human && 50 \\
&& Man && 20 \\
&& Woman && 30 \\
&& Fox && 30 \\
&& Vixen && 16 \\
&& Dog && 14 \\
&& Chicken && 20 \\
&& Cock && 8 \\
&& Hen && 12 \\
\bottomrule
\end{NiceTabular}
```

Category	%
Animal	100
Human	50
Man	20
Woman	30
Fox	30
Vixen	16
Dog	14
Chicken	20
Cock	8
Hen	12



Three keys `trees/line-width`, `trees/color` and `trees/rounded-corners` are provided for the customization of those rules.

```
\renewcommand{\arraystretch}{1.3}
\NiceMatrixOptions{trees= {line-width = 0.4pt, color = red , rounded-corners}}
\begin{NiceTabular}{w{1}{2.5mm}w{1}{2.5mm}lr}[draw-trees-in-col=1-2]
\toprule
Category &&& \% \\
\midrule
Animal &&& 100 \\
&& Human && 50 \\
&& Man && 20 \\
&& Woman && 30 \\
&& Fox && 30 \\
&& Vixen && 16 \\
&& Dog && 14 \\
&& Chicken && 20 \\
&& Cock && 8 \\
&& Hen && 12 \\
\bottomrule
\end{NiceTabular}
```



Category	%
Animal	100
Human	50
Man	20
Woman	30
Fox	30
Vixen	16
Dog	14
Chicken	20
Cock	8
Hen	12

14.2 The key rounded-corners

The key `rounded-corners` that we will describe now has no direct link with the key `corners` (which is used to specify “empty corners”) described in the part 5.3.3, p. 15.

The key `rounded-corners` specifies that the tabular should have rounded corners with a radius equal to the value of that key (the default value is 4 pt⁶³). More precisely, that key has two effects that we describe now.

- All the commands for coloring the cells, columns and rows (in the `\CodeBefore` but also directly in the array will respect those rounded corners.
- When the key `hvlines` is used, the exterior rules will be drawn with rounded corners.⁶⁴

That key is available in all the environments and commands (e.g. `\pAutoNiceMatrix`) of `nicematrix` and also in the command `\NiceMatrixOptions`.

⁶³This value is the initial value of the *rounded corners* of Tikz.

⁶⁴Of course, when used in an environment with delimiters (`{pNiceMatrix}`, `{bNiceArray}`, etc.), the key `hvlines` does not draw the exterior rules.

```

\begin{NiceTabular}
  [hvlines,rounded-corners]
  {ccc}
\CodeBefore
  \rowcolor{red!15}{1}
\Body
Last name & First name & Profession \\
Arvy & Jacques & Physicist \\
Jalon & Amandine & Physicist
\end{NiceTabular}

```

Last name	First name	Profession
Arvy	Jacques	Physicist
Jalon	Amandine	Physicist



14.3 Command `\ShowCellNames`

The command `\ShowCellNames`, which may be used in the `\CodeBefore` and in the `\CodeAfter` displays the name (with the form $i-j$) of each cell. When used in the `\CodeAfter`, that command applies a semi-transparent white rectangle to fade the array (caution: some PDF readers don't support transparency).

```

\begin{NiceTabular}{ccc}[hvlines,cell-space-limits=3pt]
  \Block{2-2}{} & & & test \\
  & & & blabla \\
  & & & some text & nothing
\CodeAfter \ShowCellNames
\end{NiceTabular}

```

1-1	1-2	1-3
2-1	2-2	2-3
3-1	3-2	3-3



14.4 Use of the column type `S` of `siunitx`

If the package `siunitx` is loaded (before or after `nicematrix`), it's possible to use the `S` column type of `siunitx` in the environments of `nicematrix`.

```

$\begin{pNiceArray}{Scw{c}{1cm}c}[xdots/nullify,first-row]
{C_1} & \Cdots & & C_n \\
2.3 & & 0 & \Cdots & 0 \\
12.4 & \Vdots & & \Vdots \\
1.45 \\
7.2 & & 0 & \Cdots & 0
\end{pNiceArray}$

```

$$\begin{pmatrix}
 C_1 & \dots & C_n \\
 2.3 & 0 & \dots & 0 \\
 12.4 & \vdots & & \vdots \\
 1.45 & \vdots & & \vdots \\
 7.2 & 0 & \dots & 0
 \end{pmatrix}$$


On the other hand, the `d` columns of the package `dcolumn` are not supported by `nicematrix`.

14.5 Default column type in `\NiceMatrix`

The environments without preamble (`\NiceMatrix`, `\pNiceMatrix`, `\bNiceMatrix`, etc.) and the commande `\pAutoNiceMatrix` (and its variants) provide an option `columns-type` to specify the type of column which will be used (the initial value is, of course, `c`).

The keys `l` and `r` are shortcuts for `columns-type=l` and `columns-type=r`.

```

$\begin{bNiceMatrix}[r]
\cos x & - \sin x \\
\sin x & \cos x
\end{bNiceMatrix}$

```

$$\begin{bmatrix}
 \cos x & - \sin x \\
 \sin x & \cos x
 \end{bmatrix}$$


The key `columns-type` is available in `\NiceMatrixOptions` but with the prefix `matrix`, which means that its name is, within `\NiceMatrixOptions` : `matrix/columns-type`.

14.6 The command `\rotate`

The package `nicematrix` provides a command `\rotate`. When used in the beginning of a cell, this command composes the contents of the cell after a rotation of 90° in the direct sens. In the following command, we use that command in the `code-for-first-row`.⁶⁵

```
\NiceMatrixOptions%
{code-for-first-row = \scriptstyle \rotate \text{image of },
 code-for-last-col = \scriptstyle }
$A = \begin{pNiceMatrix}[first-row,last-col=4]
e_1 & e_2 & e_3 & \\
1 & 2 & 3 & e_1 \\
4 & 5 & 6 & e_2 \\
7 & 8 & 9 & e_3
\end{pNiceMatrix}$
```

$$A = \begin{matrix} \text{image of } e_1 & \text{image of } e_2 & \text{image of } e_3 \\ \begin{pmatrix} 1 & 2 & 3 \\ 4 & 5 & 6 \\ 7 & 8 & 9 \end{pmatrix} & e_1 & e_2 & e_3 \end{matrix}$$



If the command `\rotate` is used in the “last row” (exterior to the matrix), the corresponding elements are aligned upwards as shown below.

```
\NiceMatrixOptions%
{code-for-last-row = \scriptstyle \rotate ,
 code-for-last-col = \scriptstyle }
$A = \begin{pNiceMatrix}[last-row=4,last-col=4]
1 & 2 & 3 & e_1 \\
4 & 5 & 6 & e_2 \\
7 & 8 & 9 & e_3 \\
\text{image of } e_1 & e_2 & e_3 & \\
\end{pNiceMatrix}$
```

$$A = \begin{matrix} \begin{pmatrix} 1 & 2 & 3 \\ 4 & 5 & 6 \\ 7 & 8 & 9 \end{pmatrix} & e_1 & e_2 & e_3 \\ \text{image of } e_1 & e_2 & e_3 & \end{matrix}$$



The command `\rotate` has a key `c`: `\rotate[c]` (spaces are deleted after `\rotate[c]`). When that key is used, the content is composed in a `\vcenter` and, therefore, in most cases, we will have a vertical alignment.

Caution: the command `\rotate` is designed to be used in a `\Block` or in columns of type `l`, `r`, `c`, `w` ou `W`; if it is used in other column types (such as `p{...}`), the result will maybe differ from what is expected. In that case, it will valuable to consider the command `\rotatebox` of the package `graphicx` (that package is loaded by `nicematrix`).

14.7 The option `small`

With the option `small`, the environments of the package `nicematrix` are composed in a way similar to the environment `{smallmatrix}` of the package `amsmath` (and the environments `{psmallmatrix}`, `{bsmallmatrix}`, etc. of the package `mathtools`).

```
$$\begin{bNiceArray}{cccc|c}[small,
last-col ,
code-for-last-col = \scriptscriptstyle,
columns-width = 3mm ]
1 & -2 & 3 & 4 & 5 & \\
0 & 3 & 2 & 1 & 2 & L_2 \ \text{gets } 2 L_1 - L_2 \\
0 & 1 & 1 & 2 & 3 & L_3 \ \text{gets } L_1 + L_3
\end{bNiceArray}$$
```

$$\begin{bmatrix} 1 & -2 & 3 & 4 & 5 \\ 0 & 3 & 2 & 1 & 2 \\ 0 & 1 & 1 & 2 & 3 \end{bmatrix} \begin{matrix} L_2 \leftarrow 2L_1 - L_2 \\ L_3 \leftarrow L_1 + L_3 \end{matrix}$$



⁶⁵It can also be used in `\RowStyle` (cf. p. 27.)

One should note that the environment `{NiceMatrix}` with the option `small` is not composed *exactly* as the environment `{smallmatrix}`. Indeed, all the environments of `nicematrix` are constructed upon `{array}` (of the package `array`) whereas the environment `{smallmatrix}` is constructed directly with an `\halign` of TeX.

In fact, the option `small` corresponds to the following tuning:

- the cells of the array are composed with `\scriptstyle`;
- `\arraystretch` is set to 0.47;
- `\arraycolsep` is set to 1.45 pt;
- the characteristics of the dotted lines are also modified.

When the key `small` is in force, some functionalities of `nicematrix` are no longer available: for example, it's no longer possible to put vertical delimiters directly in the preamble of an environment with preamble (cf. section 11, p. 39).

14.8 The counters `iRow` and `jCol`

In the cells of the array, it's possible to use the LaTeX counters `iRow` and `jCol`⁶⁶ which represent the number of the current row and the number of the current column. We recall that the exterior “first row” (if it exists) has the number 0 and that the exterior “first column” (if it exists) has also the number 0. Of course, the user must not change the value of these counters `iRow` and `jCol` which are used internally by `nicematrix`.

In the `\CodeBefore` (cf. p. 20) and in the `\CodeAfter` (cf. p. 40), `iRow` represents the total number of rows (except the potential exterior rows: cf. p. 30) and `jCol` represents the total number of columns (except the potential exterior columns).

```

 $\begin{pNiceMatrix}$ % don't forget the %
  [first-row,
   first-col,
   code-for-first-row = \mathbf{\alpha{jCol}} ,
   code-for-first-col = \mathbf{\arabic{iRow}} ]
& & & & \\
& 1 & 2 & 3 & 4 \\
& 5 & 6 & 7 & 8 \\
& 9 & 10 & 11 & 12
\end{pNiceMatrix}

```

$$\begin{matrix}
 \mathbf{a} & \mathbf{b} & \mathbf{c} & \mathbf{d} \\
 \mathbf{1} & \begin{pmatrix} 1 & 2 & 3 & 4 \end{pmatrix} \\
 \mathbf{2} & \begin{pmatrix} 5 & 6 & 7 & 8 \end{pmatrix} \\
 \mathbf{3} & \begin{pmatrix} 9 & 10 & 11 & 12 \end{pmatrix}
 \end{matrix}$$



If LaTeX counters called `iRow` and `jCol` are defined in the document by packages other than `nicematrix` (or by the final user), they are shadowed in the environments of `nicematrix`.

The package `nicematrix` also provides commands in order to compose automatically matrices from a general pattern. These commands are `\AutoNiceMatrix`, `\pAutoNiceMatrix`, `\bAutoNiceMatrix`, `\vAutoNiceMatrix`, `\VAutoNiceMatrix` et `\BAutoNiceMatrix`.

These commands take in two mandatory arguments. The first is the format of the matrix, with the syntax `n-p` where `n` is the number of rows and `p` the number of columns. The second argument is the pattern (it's a list of tokens which are inserted in each cell of the constructed matrix).

```

 $C = \pAutoNiceMatrix{3-3}{C_{\arabic{iRow},\arabic{jCol}}}$ 

```

$$C = \begin{pmatrix} C_{1,1} & C_{1,2} & C_{1,3} \\ C_{2,1} & C_{2,2} & C_{2,3} \\ C_{3,1} & C_{3,2} & C_{3,3} \end{pmatrix}$$



There exists also `\AutoNiceArrayWithDelims` similar to `{NiceArrayWithDelims}`.

⁶⁶These counters are actual LaTeX counters: the underlying TeX counters are `\c@iRow` and `\c@jCol`

14.9 The key `light-syntax`

The option `light-syntax` (inspired by the package `spalign`) allows the user to compose the arrays with a lighter syntax, which gives a better legibility of the TeX source.

When this option is used, one should use the semicolon for the end of a row and spaces or tabulations to separate the columns. However, as usual in the TeX world, the spaces after a control sequence are discarded and the elements between curly braces are considered as a whole.

```


$$\begin{bNiceMatrix}[light-syntax,first-row,first-col]
 {} a & b & ; \\
 a & 2\cos a & {\cos a + \cos b} ; \\
 b & \cos a + \cos b & {2\cos b} \\
 \end{bNiceMatrix}$$


```



It's possible to change the character used to mark the end of rows with the option `end-of-row`. As said before, the initial value is a semicolon.

When the option `light-syntax` is used, it is not possible to put verbatim material (for example with the command `\verb`) in the cells of the array.⁶⁷

The key `light-syntax-expanded` has the same behaviour as the key `light-syntax` but the body of the environment is expanded (in the TeX sense⁶⁸) before being split in rows (but after the extraction of a potential `\CodeAfter`).

14.10 Color of the delimiters

For the environments with delimiters (`{pNiceArray}`, `{pNiceMatrix}`, etc.), it's possible to change the color of the delimiters with the key `delimiters/color`.

```


$$\begin{bNiceMatrix}[delimiters/color=red]
 1 & 2 \\
 3 & 4 \\
 \end{bNiceMatrix}$$


```



This color also applies to the delimiters drawn by the command `\SubMatrix` (cf. p. 41) and for the delimiters directly specified in the preamble of the environments with preamble (cf. p. 39).

14.11 The environment `{NiceArrayWithDelims}`

In fact, the environment `{pNiceArray}` and its variants are based upon a more general environment, called `{NiceArrayWithDelims}`. The first two mandatory arguments of this environment are the left and right delimiters used in the construction of the matrix.

It's possible to use `{NiceArrayWithDelims}` if we want to use atypical or asymmetrical delimiters.

```


$$\begin{NiceArrayWithDelims}
 {\downarrow}{\uparrow}{ccc}[margin]
 1 & 2 & 3 \\
 4 & 5 & 6 \\
 7 & 8 & 9 \\
 \end{NiceArrayWithDelims}$$


```



⁶⁷The reason is that, when the option `light-syntax` is used, the whole content of the environment is loaded as a TeX argument to be analyzed. The environment doesn't behave in that case as a standard environment of LaTeX which only put TeX commands before and after the content.

⁶⁸More precisely, it's an expansion of type `e` of L3.

14.12 The command `\OnlyMainNiceMatrix`

The command `\OnlyMainNiceMatrix` executes its argument only when it is in the main part of the array, that is to say when it is not in one of the exterior rows or one of the exterior columns. If it is used outside an environment of `nicematrix`, that command is no-op.

For an example of utilisation, see tex.stackexchange.com/questions/488566

15 Use of TikZ with `nicematrix`

15.1 The nodes corresponding to the contents of the cells

The package `nicematrix` creates a PGF/TikZ node⁶⁹ for the **content** of each (non-empty) cell of the array. These nodes are used to draw the dotted lines between the cells of the matrix (inter alia).

Caution : By default, no node is created in an empty cell.

However, it's possible to impose the creation of a node with the command `\NotEmpty`.⁷⁰

The creation of those nodes needs time and memory. It's possible to desactive ponctually the creation of those nodes with the key `no-cell-nodes` in order to speed up the compilations. But be careful: those nodes are used internally but `nicematrix` for several features. One should use the key `no-cell-nodes` only when those feateures are not used. Among these are the key `corners` and the commands for the continuous dotted lines (`\Cdots`, etc.).

The nodes of a document must have distinct names. That's why the names of the nodes created by `nicematrix` contains the number of the current environment. Indeed, the environments of `nicematrix` are numbered by a internal global counter.

In the environment with the number n , the node of the row i and column j has for name `nm-n-i-j`.

The command `\NiceMatrixLastEnv` provides the number of the last environment of `nicematrix` (for LaTeX, it's a “fully expandable” command and not a counter).

However, it's advisable to use instead the key `name`⁷¹. This key gives a name to the current environment. When the environment has a name, the nodes are accessible with the name “*name-i-j*” where *name* is the name given to the array and i and j the numbers of row and column. It's possible to use these nodes with PGF but the final user will probably prefer to use TikZ (which is a convenient layer upon PGF). However, one should remind that `nicematrix` doesn't load TikZ by default. In the following examples, we assume that TikZ has been loaded.

```

\begin{pNiceMatrix}[name=mymatrix]
1 & 2 & 3 \\
4 & 5 & 6 \\
7 & 8 & 9 \\
\end{pNiceMatrix}
\tikz[remember picture,overlay]
\draw (mymatrix-2-2) circle (2mm) ;

```

$$\begin{pmatrix} 1 & 2 & 3 \\ 4 & \textcircled{5} & 6 \\ 7 & 8 & 9 \end{pmatrix}$$



Don't forget the options `remember picture` and `overlay`.

In the `\CodeAfter`, the things are easier : one must refer to the nodes with the form $i-j$ (we don't have to indicate the environment which is of course the current environment).

⁶⁹We recall that TikZ is a layer over PGF. The extension `nicematrix` loads PGF but does not load TikZ. We speak of PGF/TikZ nodes to emphase the fact that the PGF nodes created by `nicematrix` may be used with PGF but also with TikZ. The final user will probably prefer to use TikZ rather than PGF.

⁷⁰One should note that, with that command, the cell is considered as non-empty, which has consequences for the continuous dotted lines (cf. p. 32) and the computation of the “corners” (cf. p. 15).

⁷¹The value of the key `name` is *expanded* (in the TeX sens).

```

 $\begin{pNiceMatrix}$ 
1 & 2 & 3 \\
4 & 5 & 6 \\
7 & 8 & 9
 $\end{pNiceMatrix}$ 

```

$$\begin{pmatrix} 1 & 2 & 3 \\ 4 & \textcircled{5} & 6 \\ 7 & 8 & 9 \end{pmatrix}$$


The nodes of the last column (except the potential “last column” specified by `last-col72`) may also be indicated by `i-last`. Similarly, the nodes of the last row may be indicated by `last-j`.

In the following example, we have stroked all the nodes of the matrix.

$$\begin{pmatrix} a & a+b & a+b+c \\ a & a & a+b \\ a & a & a \end{pmatrix}$$

Since those nodes are PGF nodes, one won’t be surprised to learn that they are drawn by using a specific PGF style. That style is called `nicematrix/cell-node` and its definition in the source file `nicematrix.sty` is as follows:

```

\pgfset
{
  nicematrix / cell-node /.style =
  {
    inner sep = 0 pt ,
    minimum width = 0 pt
  }
}

```

The final user may modify that style by changing the values of the keys `text/rotate`, `inner xsep`, `inner ysep`, `inner sep`, `outer xsep`, `outer ysep`, `outer sep`, `minimum width`, `minimum height` and `minimum size`.

For an example of utilisation, see part 18.12, p. 79.

15.1.1 The key `pgf-node-code`

For the experienced users, `nicematrix` provides the key `pgf-node-code` which corresponds to some PGF node that will be executed at the creation, by PGF, of the nodes corresponding to the cells of the array. More precisely, the value given to the key `pgf-node-code` will be passed in the fifth argument of the command `\pgfnode`. That value should contain at least an instruction such as `\pgfusepath`, `\pgfusepathqstroke`, `\pgfusepathqfill`, etc.

15.1.2 The columns `V` of `varwidth`

When the extension `varwidth` is loaded, the columns of the type `V` defined by `varwidth` are supported by `nicematrix`. It may be interesting to notice that, for a cell of a column of type `V`, the PGF/TikZ node created by `nicematrix` for the content of that cell has a width adjusted to the content of the cell. This is in contrast to the case of the columns of type `p`, `m` or `b` for which the nodes have always a width equal to the width of the column. In the following example, the command `\lipsum` is provided by the eponymous package.

```

\begin{NiceTabular}{V{10cm}}
\bfseries \large
Titre \\
\lipsum[1][1-4]
\CodeAfter
\tikz \draw [rounded corners] (1-1) -| (last-|2) -- (last-|1) |- (1-1) ;
\end{NiceTabular}

```

⁷²For the exterior columns, cf. part 9, p. 30.

Titre

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna.

We have used the nodes corresponding to the position of the potential rules, which are described below (cf. p. 61).

Of course, there are dedicated packages to such constructions (for example `tcolorbox`).

15.2 The “medium nodes” and the “large nodes”

In fact, the package `nicematrix` can create “extra nodes”: the “medium nodes” and the “large nodes”. The first ones are created with the option `create-medium-nodes` and the second ones with the option `create-large-nodes`.⁷³

These nodes are not used by `nicematrix` by default, and that’s why they are not created by default.

The names of the “medium nodes” are constructed by adding the suffix “-medium” to the names of the “normal nodes”. In the following example, we have underlined the “medium nodes”. We consider that this example is self-explanatory.

$$\begin{pmatrix} a & a+b & a+b+c \\ a & a & a+b \\ a & a & a \end{pmatrix}$$

The names of the “large nodes” are constructed by adding the suffix “-large” to the names of the “normal nodes”. In the following example, we have underlined the “large nodes”. We consider that this example is self-explanatory.⁷⁴

$$\begin{pmatrix} a & a+b & a+b+c \\ a & a & a+b \\ a & a & a \end{pmatrix}$$

The “large nodes” of the first column and last column may appear too small for some usage. That’s why it’s possible to use the options `left-margin` and `right-margin` to add space on both sides of the array and also space in the “large nodes” of the first column and last column. In the following example, we have used the options `left-margin` and `right-margin`.⁷⁵

$$\begin{pmatrix} a & a+b & a+b+c \\ a & a & a+b \\ a & a & a \end{pmatrix}$$

It’s also possible to add more space on both side of the array with the options `extra-left-margin` and `extra-right-margin`. These margins are not incorporated in the “large nodes”. It’s possible to fix both values with the option `extra-margin` and, in the following example, we use `extra-margin` with the value 3 pt.

$$\begin{pmatrix} a & a+b & a+b+c \\ a & a & a+b \\ a & a & a \end{pmatrix}$$

Be careful : These nodes are reconstructed from the contents of the contents cells of the array. Usually, they do not correspond to the cells delimited by the rules (if we consider that these rules are drawn).

⁷³There is also an option `create-extra-nodes` which is an alias for the conjunction of `create-medium-nodes` and `create-large-nodes`.

⁷⁴There is no “large nodes” created in the exterior rows and columns (for these rows and columns, cf. p. 30).

⁷⁵The options `left-margin` and `right-margin` take dimensions as values but, if no value is given, the default value is used, which is `\arraycolsep` (by default: 5 pt). There is also an option `margin` to fix both `left-margin` and `right-margin` to the same value.

Here is an array composed with the following code:

```
\large
\begin{NiceTabular}{\w{2cm}11}[hvlines]
fraise & amande & abricot \\
prune & pêche & poire \\
noix & noisette & brugnon
\end{NiceTabular}
```

fraise	amande	abricot
prune	pêche	poire
noix	noisette	brugnon

Here, we have colored all the cells of the array with `\chessboardcolors`.

fraise	amande	abricot
prune	pêche	poire
noix	noisette	brugnon

Here are the “large nodes” of this array (without use of `margin` nor `extra-margin`).

fraise	amande	abricot
prune	pêche	poire
noix	noisette	brugnon

The nodes we have described are not available by default in the `\CodeBefore` (described p. 20). It’s possible to have these nodes available in the `\CodeBefore` by using the key `create-cell-nodes` of the keyword `\CodeBefore` (in that case, the nodes are created first before the construction of the array by using information written on the `aux` file and created a second time during the construction of the array itself; this mechanism is not activated by default for efficiency reasons).

Here is an example which uses these nodes in the `\CodeAfter`.

```
\begin{NiceArray}{c@{\;}c@{\;}c@{\;}c@{\;}c}[create-medium-nodes]
u_1 & - & u_0 & = & r & \\
u_2 & - & u_1 & = & r & \\
u_3 & - & u_2 & = & r & \\
u_4 & - & u_3 & = & r & \\
\phantom{u_5} & & \phantom{u_4} & & \smash{\vdots} & \\
u_n & - & u_{n-1} & = & r & \\
\hline
u_n & - & u_0 & = & nr & \\
\CodeAfter
\tikz[very thick, red, opacity=0.4, name suffix = -medium]
\draw (1-1.north west) -- (2-3.south east)
(2-1.north west) -- (3-3.south east)
(3-1.north west) -- (4-3.south east)
(4-1.north west) -- (5-3.south east)
(5-1.north west) -- (6-3.south east) ;
\end{NiceArray}
```



$$\begin{array}{l}
 \cancel{u_1 - u_0 = r} \\
 \cancel{u_2 - u_1 = r} \\
 \cancel{u_3 - u_2 = r} \\
 \cancel{u_4 - u_3 = r} \\
 \quad \vdots \\
 \cancel{u_n - u_{n-1} = r} \\
 \hline
 u_n - u_0 = nr
 \end{array}$$

15.3 The nodes which indicate the position of the rules

The package `nicematrix` creates a PGF/TikZ node merely called i (with the classical prefix) at the intersection of the horizontal rule of number i and the vertical rule of number i (more specifically the potential position of those rules because maybe there are not actually drawn). The last node has also an alias called `last`.

There are also nodes called $i.1$, $i.2$, $i.25$, $i.3$, $i.4$, $i.5$, $i.6$, $i.7$, $i.75$, $i.8$ and $i.9$ between the node i and the node $i + 1$.

These nodes are available in the `\CodeBefore` and the `\CodeAfter`.

1	1.5	2	tulipe	lys
arum	2.5	3	violette mauve	
muguet	dahlia	3.5	4	

If we use TikZ (we remind that `nicematrix` does not load TikZ by default, by only PGF, which is a sub-layer of TikZ), we can access, in the `\CodeAfter` but also in the `\CodeBefore`, to the intersection of the (potential) horizontal rule i and the (potential) vertical rule j with the syntax $(i-j)$.

```
\begin{NiceMatrix}
\CodeBefore
  \tikz \draw [fill=red!15] (7-|4) |- (8-|5) |- (9-|6) |- cycle ;
\Body
1 \\\
1 & 1 \\\
1 & 2 & 1 \\\
1 & 3 & 3 & 1 \\\
1 & 4 & 6 & 4 & 1 \\\
1 & 5 & 10 & 10 & 5 & 1 \\\
1 & 6 & 15 & 20 & 15 & 6 & 1 \\\
1 & 7 & 21 & 35 & 35 & 21 & 7 & 1 \\\
1 & 8 & 28 & 56 & 70 & 56 & 28 & 8 & 1
\end{NiceMatrix}
```

1									
1	1								
1	2	1							
1	3	3	1						
1	4	6	4	1					
1	5	10	10	5	1				
1	6	15	20	15	6	1			
1	7	21	35	35	21	7	1		
1	8	28	56	70	56	28	8	1	



The “decimal” nodes (like $i.4$) may be used, for example to cross a row of a matrix (if TikZ is loaded).

```
\begin{pNiceArray}{ccc|c}
2 & 1 & 3 & 0 \\\
3 & 3 & 1 & 0 \\\
3 & 3 & 1 & 0
\CodeAfter
  \tikz \draw [red] (3.4-|1) -- (3.4-|last) ;
\end{pNiceArray}
```

$$\left(\begin{array}{ccc|c} 2 & 1 & 3 & 0 \\ 3 & 3 & 1 & 0 \\ \hline 3 & 3 & 1 & 0 \end{array} \right)$$



15.4 The nodes corresponding to the command `\SubMatrix`

The command `\SubMatrix` available in the `\CodeAfter` has been described p. 41.

If a command `\SubMatrix` has been used with the key `name` with an expression such as `name=MyName` three PGF/TikZ nodes are created with the names `MyName-left`, `MyName` and `MyName-right`.

The nodes `MyName-left` and `MyName-right` correspond to the delimiters left and right and the node `MyName` correspond to the submatrix itself.

In the following example, we have highlighted these nodes (the submatrix itself has been created with `\SubMatrix\{{2-2}{3-3}\}`).

$$\begin{pmatrix} 121 & 23 & 345 & 345 \\ 45 & \left\{ \begin{array}{cc} 346 & 863 \end{array} \right\} & 444 & \\ 3462 & \left\{ \begin{array}{cc} 38458 & 34 \end{array} \right\} & 294 & \\ 34 & 7 & 78 & 309 \end{pmatrix}$$

16 API for the developers

The package `nicematrix` provides two variables which are internal but public⁷⁶:

- `\g_nicematrix_code_before_tl` ;
- `\g_nicematrix_code_after_tl`.

These variables contain the code of what we have called the “code-before” (usually specified at the beginning of the environment with the syntax using the keywords `\CodeBefore` and `\Body`) and the “code-after” (usually specified at the end of the environment after the keyword `\CodeAfter`). The developer can use them to add code from a cell of the array (the affectation must be global, allowing to exit the cell, which is a TeX group).

One should remark that the use of `\g_nicematrix_code_before_tl` needs one compilation more (because the instructions are written on the `aux` file to be used during the next run).

Example : We want to write a command `\crossbox` to draw a cross in the current cell. This command will take in an optional argument between square brackets for a list of pairs *key-value* which will be given to TikZ before the drawing. It’s possible to program such command `\crossbox` as follows, explicitly using the public variable `\g_nicematrix_code_before_tl`.

We use `\g_nicematrix_code_before_tl` instead of `\g_nicematrix_code_after_tl` because we want to draw the cross before the horizontal and vertical rules (in order to have a perfect output).

```
\ExplSyntaxOn
\cs_new_protected:Nn \__pantigny_crossbox:nnn
{
  \tikz \draw [ #3 ]
    ( #1 -| \interval { #2 + 1 } ) -- ( \interval { #1 + 1 } -| #2 )
    ( #1 -| #2 ) -- ( \interval { #1 + 1 } -| \interval { #2 + 1 } ) ;
}

\NewDocumentCommand \crossbox { ! 0 { } }
{
  \tl_gput_right:Ne \g_nicematrix_code_before_tl
  {
    \__pantigny_crossbox:nnn
    { \int_use:c { c@iRow } } }
    { \int_use:c { c@jCol } } }
    { \exp_not:n { #1 } } }
}
```

⁷⁶According to the LaTeX3 conventions, each variable with name beginning with `\g_nicematrix` ou `\l_nicematrix` is public and each variable with name beginning with `\g__nicematrix` or `\l__nicematrix` is private.

```

    }
    \ignorespaces
  }
\ExplSyntaxOff

```

We have used the LaTeX counters `iRow` and `jCol` provided by `nicematrix` (cf. p. 55).

Here is an example of utilisation:

```

\begin{NiceTabular}{ccc}[hvlines]
\CodeBefore
  \arraycolor{gray!10}
\Body
merlan & requin & cabillaud \\
baleine & \crossbox[red] & morue \\
mante & raie & poule
\end{NiceTabular}

```

merlan	requin	cabillaud
baleine		morue
mante	raie	poule

17 Technical remarks

First remark: the package `underscore` must be loaded before `nicematrix`. If it is loaded after, an error will be raised.

17.1 Diagonal lines

By default, all the diagonal lines⁷⁷ of a same array are “parallelized”. That means that the first diagonal line is drawn and, then, the other lines are drawn parallel to the first one (by rotation around the left-most extremity of the line). That’s why the position of the instructions `\Ddots` in the array can have a marked effect on the final result.

In the following examples, the first `\Ddots` instruction is written in color.

Example with parallelization (default):

```

$A = \begin{pNiceMatrix}
1      & \Cdots &      & 1      & \\
a+b    & \Ddots &      & \Vdots & \\
\Vdots & \Ddots &      &        & \\
a+b    & \Cdots & a+b  & 1      & \\
\end{pNiceMatrix}$

```

$$A = \begin{pmatrix} 1 & \cdots & 1 \\ a+b & \ddots & & & & & & & & & \vdots \\ \vdots & \ddots & & & & & & & & & \vdots \\ \vdots & \ddots & & & & & & & & & \vdots \\ a+b & \cdots & a+b & & & & & & & & 1 \end{pmatrix}$$

```

$A = \begin{pNiceMatrix}
1      & \Cdots &      & 1      & \\
a+b    &      &      & \Vdots & \\
\Vdots & \Ddots & \Ddots &        & \\
a+b    & \Cdots & a+b  & 1      & \\
\end{pNiceMatrix}$

```

$$A = \begin{pmatrix} 1 & \cdots & 1 \\ a+b & & & & & & & & & & \vdots \\ \vdots & \ddots & & & & & & & & & \vdots \\ \vdots & \ddots & & & & & & & & & \vdots \\ a+b & \cdots & a+b & & & & & & & & 1 \end{pmatrix}$$

It’s possible to turn off the parallelization with the option `parallelize-diags` set to `false`:

The same example without parallelization:

$$A = \begin{pmatrix} 1 & \cdots & 1 \\ a+b & & & & & & & & & & \vdots \\ \vdots & \ddots & & & & & & & & & \vdots \\ \vdots & \ddots & & & & & & & & & \vdots \\ a+b & \cdots & a+b & & & & & & & & 1 \end{pmatrix}$$

⁷⁷We speak of the lines created by `\Ddots` and not the lines created by a command `\line` in the `\CodeAfter`.

It's possible to specify the instruction `\Ddots` which will be drawn first (and which will be used to draw the other diagonal dotted lines when the parallelization is in force) with the key `draw-first`: `\Ddots[draw-first]`.

17.2 The “empty” cells

The package `nicematrix` uses, in several circumstances, the concept of “empty cell”. For example, an instruction like `\Ldots`, `\Cdots`, etc. (cf. p. 32) tries to determine the first non-empty cell on both sides. In the same way, when the key `corners` is used (cf. p. 15), `nicematrix` computes corners consisting of empty cells.

However, an “empty cell” is not necessarily a cell with no TeX content (that is to say a cell with no token between the two ampersands `&`). The precise rules are as follow.

- An implicit cell is empty. For example, in the following matrix:

```
\begin{pmatrix}
a & b & \\
c & & \\
\end{pmatrix}
```

the last cell (second row and second column) is empty.

- For the columns of type `p`, `m`, `b`, `V`⁷⁸ and `X`⁷⁹, the cell is empty if (and only if) its content in the TeX code is empty (there is only spaces between the ampersands `&`).
- For the columns of type `c`, `l`, `r` and `w{\dots}{\dots}`, the cell is empty if (and only if) its TeX output has a width equal to zero.
- A cell containing the command `\NotEmpty` is not empty (and a PGF/TikZ node is created in that cell).
- A cell with only a command `\Hspace` (or `\Hspace*`) is empty. This command `\Hspace` is a command defined by the package `nicematrix` with the same meaning as `\hspace` except that the cell where it is used is considered as empty. This command can be used to fix the width of some columns of the matrix without interfering with `nicematrix`.

17.3 The option `exterior-arraycolsep`

The environment `{array}` inserts an horizontal space equal to `\arraycolsep` before and after each column. In particular, there is a space equal to `\arraycolsep` before and after the array. This feature of the environment `{array}` was probably not a good idea⁸⁰. The environment `{matrix}` of `amsmath` and its variants (`{pmatrix}`, `{vmatrix}`, etc.) of `amsmath` prefer to delete these spaces with explicit instructions `\hskip -\arraycolsep`⁸¹. The package `nicematrix` does the same in all its environments, `{NiceArray}` included. However, if the user wants the environment `{NiceArray}` behaving by default like the environment `{array}` of `array` (for example, when adapting an existing document) it's possible to control this behaviour with the option `exterior-arraycolsep`, set by the command `\NiceMatrixOptions`. With this option, exterior spaces of length `\arraycolsep` will be inserted in the environments `{NiceArray}` (the other environments of `nicematrix` are not affected).

⁷⁸The columns of type `V` are provided by `varwidth`, which must be loaded: cf. p. 28.

⁷⁹See p. 29

⁸⁰In the documentation of `amsmath`, we can read: *The extra space of `\arraycolsep` that `array` adds on each side is a waste so we remove it [in `{matrix}`] (perhaps we should instead remove it from `array` in general, but that's a harder task).*

⁸¹And not by inserting `@{}` on both sides of the preamble of the array. As a consequence, the length of the `\hline` is not modified and may appear too long, in particular when using square brackets.

17.4 Incompatibilities

The package `nicematrix` can't be used in the class `revtex4-2` because this class is not compatible with the recent versions of LaTeX. Indeed, `revtex4-2` modifies several internal commands of `array` and those modifications have not been updated to take into account the recent changes in `array` in relation with the Tagging Project.

There might be incompatibilities between `nicematrix` and `babel` with the language which activate (in the TeX sense) some characters, in particular the character `<`.

For example, for Spanish, it's recommended to deactivate the abbreviations at load-time with the instruction:

```
\usepackage[spanish,es-noshorthands]{babel}
```



The extension `nicematrix` is usually not compatible with the classes and packages that redefine the environments `{tabular}` and `{array}`. In particular, it's the case of the class `socg-lipics-v2021`. However, in that case, it's possible to load the class with the key `notab` which requires that the environment `{tabular}` is not redefined.

The package `nicematrix` is not compatible with the class `ieeaccess` because that class is not compatible with PGF/TikZ. However, there is a simple workaround by writing:⁸²

```
\let\TeXyear\year
\documentclass{IEEEaccess}
\let\year\TeXyear
```



In order to use `nicematrix` with the class `aastex631` (of the *American Astronomical Society*), you have to add the following instructions in the preamble of your document :

```
\BeforeBegin{NiceTabular}{\let\begin\BeginEnvironment\let\end\EndEnvironment}
\BeforeBegin{NiceArray}{\let\begin\BeginEnvironment}
\BeforeBegin{NiceMatrix}{\let\begin\BeginEnvironment}
```

The package `nicematrix` is not fully compatible with the packages and classes of LuaTeX-ja: the detection of the empty corners (cf. p. 15) may be wrong in some circumstances.

The package `nicematrix` is not fully compatible with the package `arydshln` (because this package redefines many internals of `array`) and does not support the columns `V` of `boldline` (because the letter `V` is reserved for the columns `V` of `varwidth`). By any means, `nicematrix` provides, with the key `custom-line` (cf. part 5.3.5, p. 16), tools to draw dashed rules and rules of different widths.

The columns `d` of `dcolumn` are not supported (but it's possible to use the columns `S` of `siunitx`).

17.5 Compatibility with the Tagging Project of LaTeX

Since the version 7.0, the extension `nicematrix` is compatible with the *Tagging Project* of LaTeX (whose aim is to create tagged PDF). At this time, only simple standard tabulars are correctly tagged. Here is an example of code which will generate a tagged PDF.

```
\DocumentMetadata{tagging = on}
\documentclass{article}
\usepackage{lmodern}
\usepackage{nicematrix}

\begin{document}

\begin{center}
\tagpdfsetup{table/header-rows=1}
\begin{NiceTabular}{ccc}[hvlines]
First name & Last name & Age \\
Paul & Imbert & $66$ \\
\end{NiceTabular}
\end{center}
\end{document}
```

⁸²See <https://tex.stackexchange.com/questions/528975>

```

John      & Sarrus      & $23$ \\
Liz       & Taylor      & $100$ \\
George    & Adams       & $34$ \\
\end{NiceTabular}
\end{center}

\end{document}

```



18 Examples

18.1 Notes in the tabulars

The tools provided by `nicematrix` for the composition of the tabular notes have been presented in the section 13 p. 46.

Let's consider that we wish to number the notes of a tabular with stars.⁸³

First, we write a command `\stars` similar to the well-known commands `\arabic`, `\alph`, `\Alph`, etc. which produces a number of stars equal to its argument⁸⁴.

```

\ExplSyntaxOn
\NewDocumentCommand { \stars } { m }
  { \prg_replicate:nn { \value { #1 } } { \ ( \star \ ) } }
\ExplSyntaxOff

```



Of course, we change the style of the labels with the key `notes/style`. However, it would be interesting to change also some parameters in the type of list used to compose the notes at the end of the tabular. First, we required a composition flush right for the labels with the setting `align=right`. Moreover, we want the labels to be composed on a width equal to the width of the widest label. The widest label is, of course, the label with the greatest number of stars. We know that number: it is equal to `\value{tabularnote}` (because `tabularnote` is the LaTeX counter used by `\tabularnote` and, therefore, at the end of the tabular, its value is equal to the total number of tabular notes). We use the key `widest*` of `enumitem` in order to require a width equal to that value: `widest*=\value{tabularnote}`.

```

\NiceMatrixOptions
{
  notes =
  {
    style = \stars{#1} ,
    enumitem-keys =
    {
      widest* = \value{tabularnote} ,
      align = right
    }
  }
}

\begin{NiceTabular}{@{}llr@{}}
\toprule \RowStyle{\bfseries}
Last name & First name & Birth day \\
\midrule
Achard\tabularnote{Achard is an old family of the Poitou.}
& Jacques & 5 juin 1962 \\
Lefebvre\tabularnote{The name Lefebvre is an alteration of the name Lefebure.}
& Mathilde & 23 mai 1988 \\

```



⁸³Of course, it's realistic only when there is very few notes in the tabular.

⁸⁴In fact: the value of its argument.

```
Vanesse & Stephany & 30 octobre 1994 \\
Dupont & Chantal & 15 janvier 1998 \\
\bottomrule
\end{NiceTabular}
```



Last name	First name	Birth day
Achard*	Jacques	June 5, 2005
Lefebvre**	Mathilde	January 23, 1975
Vanesse	Stephany	October 30, 1994
Dupont	Chantal	January 15, 1998

*Achard is an old family of the Poitou.
 **The name Lefebvre is an alteration of the name Lefebure.

18.2 Utilisation of the key “tikz” of the command \Block

The key TikZ of the command \Block is available only when TikZ is loaded.⁸⁵
 For the following example, we also need the TikZ library `patterns`.

```
\usetikzlibrary{patterns}

\ttfamily \small
\begin{NiceTabular}{X[m]X[m]X[m]}[hvlines, cell-space-limits=3pt, rounded-corners]
  \Block[tikz={pattern=grid, pattern color=lightgray}]{}
    {pattern = grid, \ pattern color = lightgray}
& \Block[tikz={pattern = north west lines, pattern color=blue}]{}
  {pattern = north west lines, \ pattern color = blue}
& \Block[tikz={outer color = red!50, inner color=white }]{2-1}
  {outer color = red!50, \ inner color = white} \
  \Block[tikz={pattern = sixpointed stars, pattern color = blue!15}]{}
  {pattern = sixpointed stars, \ pattern color = blue!15}
& \Block[tikz={left color = blue!50}]{}
  {left color = blue!50} \
\end{NiceTabular}
```



pattern = grid, pattern color = lightgray	pattern = north west lines, pattern color = blue	outer color = red!50, inner color = white
pattern = sixpointed stars, pattern color = blue!15	left color = blue!50	

In the following example, we use the key `tikz` to hatch a row of the tabular. Remark that you use the key `transparent` of the command \Block in order to have the rules drawn in the block.⁸⁶

```
\begin{NiceTabular}{ccc}[hvlines]
\CodeBefore
  \columncolor[RGB]{169,208,142}{2}
\Body
one & two & three \\
\Block[transparent, tikz={pattern = north west lines, pattern color = gray}]{1-*}{}
four & five & six \\
seven & eight & nine
\end{NiceTabular}
```



one	two	three
four	five	six
seven	eight	nine

⁸⁵By default, `nicematrix` only loads PGF, which is a sub-layer of TikZ.

⁸⁶By default, the rules are not drawn in the blocks created by the command \Block (cf. section 5 p. 11): with the key `transparent`, they are drawn (the block becomes *transparent* to the exterior rules).

18.3 Use with tcolorbox

Here is an example of use of `{NiceTabular}` within a command `\tcbox` of `tcolorbox`. We have used the key `hvlines-except-borders` in order to draw all the rules, except on the borders (which are, of course, added by `tcolorbox`).

```
\tcbset
{
  colframe = blue!50!black ,
  colback = white ,
  fonttitle = \bfseries ,
  nobeforeafter ,
  center title
}

\tcbox
[
  left = 0mm ,
  right = 0mm ,
  top = 0mm ,
  bottom = 0mm ,
  boxsep = 0mm ,
  toptitle = 0.5mm ,
  bottomtitle = 0.5mm ,
  title = My table
]
{
  \renewcommand{\arraystretch}{1.2}% <-- the % is mandatory here
  \begin{NiceTabular}{rcl}[hvlines-except-borders,rules/color=blue!50!black]
  \CodeBefore
    \rowcolor{red!15}{1}
  \Body
    One & Two & Three \\
    Men & Mice & Lions \\
    Upper & Middle & Lower
  \end{NiceTabular}
}
```



My table		
One	Two	Three
Men	Mice	Lions
Upper	Middle	Lower

18.4 A sign chart

```
\[\begin{NiceMatrix}[columns-width=1cm,hvlines]
f(x) & \Block[C]{1-5}{+} \\
f'(x) & \Block[C]{1-2}{+} && \Block[C]{1-2}{+} && + \\
f''(x) & - & \Block[C]{1-2}{-} && \Block[C]{1-2}{+} \\
\end{NiceMatrix}\]
```



$f(x)$	+		
$f'(x)$	+	+	+
$f''(x)$	-	-	+

18.5 Use of the key borders of the command \Block

In the following example, we use the command \Block to draw rules.

```
\usepackage{tikz} % in the preamble

\begin{pNiceMatrix}
\Block[borders={bottom,right,tikz=dotted}]{2-2}{
1 & 2 & 0 & 0 & 0 & 0 \\
4 & 5 & 0 & 0 & 0 & 0 \\
0 & 0 & \Block[borders={bottom,top,right,left,tikz=dotted}]{2-2}{
7 & 1 & 0 & 0 \\
0 & 0 & -1 & 2 & 0 & 0 \\
0 & 0 & 0 & 0 & \Block[borders={left,top,tikz=dotted}]{2-2}{
3 & 4 \\
0 & 0 & 0 & 0 & 1 & 4
}
}
\end{pNiceMatrix}
```

$$\left(\begin{array}{cc|cc|cc} 1 & 2 & 0 & 0 & 0 & 0 \\ 4 & 5 & 0 & 0 & 0 & 0 \\ \hline 0 & 0 & 7 & 1 & 0 & 0 \\ 0 & 0 & -1 & 2 & 0 & 0 \\ \hline 0 & 0 & 0 & 0 & 3 & 4 \\ 0 & 0 & 0 & 0 & 1 & 4 \end{array} \right)$$



18.6 Continuous dotted lines in the matrices

An example with the resultant of two polynomials (this example requires TikZ for the dashed rule specified by the letter ; in the preamble of the array).

```
\usepackage{tikz} % in the preamble

\setlength{\extrarowheight}{1mm}
\begin{vNiceArray}{cccc}[columns-width=6mm, xdots/shorten += 3pt]
a_0 & & & b_0 & & \\
a_1 & & \Ddots & b_1 & & \Ddots \\
\Vdots & & \Ddots & \Vdots & \Ddots & b_0 \\
a_p & & \Ddots a_0 & & & b_1 \\
& & \Ddots a_1 & b_q & & \Vdots \\
& & \Ddots \Vdots & & & \Ddots \\
& & \Ddots a_p & & & b_q
\end{vNiceArray}
```



```

\NiceMatrixOptions{xdots={horizontal-labels,line-style = <->}}
$\begin{pNiceArray}{ccc|cc}[first-row,last-col,margin]
\Hdotsfor{3}^{3} & \Hdotsfor{2}^{2} \\
2 & 1 & 1 & 1 & 1 & \Vdotsfor{3}^{3} \\
1 & 1 & 1 & 1 & 1 & \\
1 & 1 & 1 & 1 & 1 & \\
\Hline
1 & 1 & 1 & 1 & 1 & \Vdotsfor{2}^{2} \\
1 & 1 & 1 & 1 & 1 & \\
\end{pNiceArray}$

```

$$\left(\begin{array}{ccc|cc} \overleftarrow{3} & & & \overleftarrow{2} & & \\ 2 & 1 & 1 & 1 & 1 & \\ 1 & 1 & 1 & 1 & 1 & \\ 1 & 1 & 1 & 1 & 1 & \\ \hline 1 & 1 & 1 & 1 & 1 & \\ 1 & 1 & 1 & 1 & 1 & \end{array} \right) \begin{array}{l} \uparrow 3 \\ \downarrow \\ \uparrow 2 \end{array}$$

If you want the label *on the line*, you should use the special token “:” instead of “^”:

```

\NiceMatrixOptions{xdots={horizontal-labels,line-style = <->}}
$\begin{pNiceArray}{ccc|cc}[first-row,last-col,margin]
\Hdotsfor{3}:{3} & \Hdotsfor{2}:{2} \\
2 & 1 & 1 & 1 & 1 & \Vdotsfor{3}:{3} \\
1 & 1 & 1 & 1 & 1 & \\
1 & 1 & 1 & 1 & 1 & \\
\Hline
1 & 1 & 1 & 1 & 1 & \\
\Vdotsfor{2}:{2} \rlap{ \smash{rows}} \\
1 & 1 & 1 & 1 & 1 & \\
\end{pNiceArray}$

```

$$\left(\begin{array}{ccc|cc} \overleftarrow{3} & & & \overleftarrow{2} & & \\ 2 & 1 & 1 & 1 & 1 & \\ 1 & 1 & 1 & 1 & 1 & \\ 1 & 1 & 1 & 1 & 1 & \\ \hline 1 & 1 & 1 & 1 & 1 & \\ 1 & 1 & 1 & 1 & 1 & \end{array} \right) \begin{array}{l} \uparrow 3 \\ \downarrow \\ \uparrow 2 \text{ rows} \end{array}$$

If one prefers the braces of the library `decorations.pathreplacing` of TikZ, the best way is to use the commands `\Hbrace` and `\Vbrace` provided by `nicematrix` (cf. p. 38).⁸⁷

```

\NiceMatrixOptions{xdots/horizontal-labels}
$\begin{pNiceArray}{ccc|cc}[first-row,last-col,margin]
\Hbrace{3}{3} & \Hbrace{2}{2} \\
2 & 1 & 1 & 1 & 1 & \Vbrace{3}{3} \\
1 & 1 & 1 & 1 & 1 & \\
1 & 1 & 1 & 1 & 1 & \\
\Hline
1 & 1 & 1 & 1 & 1 & \Vbrace{2}{2} \\
1 & 1 & 1 & 1 & 1 & \\
\end{pNiceArray}$

```

$$\left(\begin{array}{ccc|cc} \overbrace{3} & & & \overbrace{2} & & \\ 2 & 1 & 1 & 1 & 1 & \\ 1 & 1 & 1 & 1 & 1 & \\ 1 & 1 & 1 & 1 & 1 & \\ \hline 1 & 1 & 1 & 1 & 1 & \\ 1 & 1 & 1 & 1 & 1 & \end{array} \right) \begin{array}{l} \uparrow 3 \\ \downarrow \\ \uparrow 2 \end{array}$$

⁸⁷Remark that those commands are available only if TikZ has been loaded with the library `decorations.pathreplacing`: `\usepackage{tikz} \usetikzlibrary{decorations.pathreplacing}`.

It's possible to change the TikZ style of those braces by changing the TikZ style `nicematrix/brace`. In the following example, we assume that the TikZ extension `calligraphy` has been loaded:

```
\usetikzlibrary{calligraphy}

\NiceMatrixOptions{xdots/horizontal-labels}
\tikzset
{
  nicematrix/brace/.style =
  {
    decoration =
    {
      calligraphic brace ,
      amplitude = 0.4 em ,
      raise = -0.25 em
    } ,
    line width = 0.1 em ,
    decorate ,
  }
}
$\begin{pNiceArray}{ccc|cc}[first-row,last-col,margin]
\Hbrace{3}{3} & \Hbrace{2}{2} \\
2 & 1 & 1 & 1 & 1 & 1 & \Vbrace{3}{3} \\
1 & 1 & 1 & 1 & 1 & 1 & \\
1 & 1 & 1 & 1 & 1 & 1 & \\
\Hline
1 & 1 & 1 & 1 & 1 & 1 & \Vbrace{2}{2} \\
1 & 1 & 1 & 1 & 1 & 1 & \\
\end{pNiceArray}$
```

$$\left(\begin{array}{ccc|cc} \overbrace{2 & 1 & 1}^3 & \overbrace{1 & 1}^2 \\ 1 & 1 & 1 & 1 & 1 \\ 1 & 1 & 1 & 1 & 1 \\ \hline 1 & 1 & 1 & 1 & 1 \\ 1 & 1 & 1 & 1 & 1 \end{array} \right) \left. \begin{array}{l} 3 \\ 2 \end{array} \right\}$$

If one prefers the curly braces of the current mathematical font of LaTeX, one should use the commands `\SubMatrix`, `\OverBrace` and `\UnderBrace` in the `\CodeAfter`.

```

$\begin{pNiceArray}{ccc|cc}[margin,last-col]
2 & 1 & 1 & 1 & 1 & 1 & \Block{3-1}{\quad 3} \\
1 & 1 & 1 & 1 & 1 & 1 & \\
1 & 1 & 1 & 1 & 1 & 1 & \\
\Hline
1 & 1 & 1 & 1 & 1 & 1 & \Block{2-1}{\quad 2} \\
1 & 1 & 1 & 1 & 1 & 1 & \\
\CodeAfter
\OverBrace[shorten,yshift=1.5mm]{1-1}{1-3}{3}
\OverBrace[shorten,yshift=1.5mm]{1-4}{1-5}{2}
\SubMatrix{.}{1-1}{3-5}{\rbrace}[xshift=3.5mm]
\SubMatrix{.}{4-1}{5-5}{\rbrace}[xshift=3.5mm]
\end{pNiceArray}$
```

$$\left(\begin{array}{ccc|cc} \overbrace{2 & 1 & 1}^3 & \overbrace{1 & 1}^2 \\ 1 & 1 & 1 & 1 & 1 \\ 1 & 1 & 1 & 1 & 1 \\ \hline 1 & 1 & 1 & 1 & 1 \\ 1 & 1 & 1 & 1 & 1 \end{array} \right) \left. \begin{array}{l} 3 \\ 2 \end{array} \right\}$$

Of course, the output may seem disappointing. That's why, for this type of use, we recommend the use of the commands `\Hbrace` and `\Vbrace` (provided by `nicematrix`), as shown in the previous examples.

18.9 Stacks of matrices

We often need to compose mathematical matrices on top on each other (for example for the resolution of linear systems).

In order to have the columns aligned one above the other, it's possible to fix a width for all the columns. That's what is done in the following example with the environment `{NiceMatrixBlock}` and its option `auto-columns-width`.

```

\begin{NiceMatrixBlock}[auto-columns-width]
\NiceMatrixOptions
{
  light-syntax,
  last-col, code-for-last-col = \color{blue}\scriptstyle,
  vlines = 5 ,
  matrix/columns-type = r ,
  no-cell-nodes % only for speedup
}
\setlength{\extrarowheight}{1mm}

\quad $\begin{pNiceMatrix}
12 -8 7 5 3 {} ;
 3 -18 12 1 4 ;
-3 -46 29 -2 -15 ;
 9 10 -5 4 7
\end{pNiceMatrix}$

\smallskip
\quad $\begin{pNiceMatrix}
12 -8 7 5 3 ;
0 64 -41 1 19 { L_2 \gets L_1-4L_2 } ;
0 -192 123 -3 -57 { L_3 \gets L_1+4L_3 } ;
0 -64 41 -1 -19 { L_4 \gets 3L_1-4L_4 } ;
\end{pNiceMatrix}$

\smallskip
\quad $\begin{pNiceMatrix}
12 -8 7 5 3 ;
0 64 -41 1 19 ;
0 0 0 0 { L_3 \gets 3 L_2 + L_3 }
\end{pNiceMatrix}$

\smallskip
\quad $\begin{pNiceMatrix}
12 -8 7 5 3 {} ;
0 64 -41 1 19 ;
\end{pNiceMatrix}$
\end{NiceMatrixBlock}

```

$$\left(\begin{array}{cccc|c} 12 & -8 & 7 & 5 & 3 \\ 3 & -18 & 12 & 1 & 4 \\ -3 & -46 & 29 & -2 & -15 \\ 9 & 10 & -5 & 4 & 7 \end{array} \right)$$

$$\left(\begin{array}{cccc|c} 12 & -8 & 7 & 5 & 3 \\ 0 & 64 & -41 & 1 & 19 \\ 0 & -192 & 123 & -3 & -57 \\ 0 & -64 & 41 & -1 & -19 \end{array} \right) \begin{array}{l} L_2 \leftarrow L_1 - 4L_2 \\ L_3 \leftarrow L_1 + 4L_3 \\ L_4 \leftarrow 3L_1 - 4L_4 \end{array}$$

$$\left(\begin{array}{cccc|c} 12 & -8 & 7 & 5 & 3 \\ 0 & 64 & -41 & 1 & 19 \\ 0 & 0 & 0 & 0 & 0 \end{array} \right) L_3 \leftarrow 3L_2 + L_3$$

$$\left(\begin{array}{cccc|c} 12 & -8 & 7 & 5 & 3 \\ 0 & 64 & -41 & 1 & 19 \end{array} \right)$$



However, one can see that the last matrix is not perfectly aligned with others. That's why, in LaTeX, the parenthesis have not exactly the same width (smaller parenthesis are a bit slimer).

In order to solve that problem, it's possible to require the delimiters to be composed with the maximal width, thanks to the boolean key `delimiters/max-width`.

```

\begin{NiceMatrixBlock}[auto-columns-width]
\NiceMatrixOptions
{
  delimiters/max-width,
  light-syntax,
  last-col, code-for-last-col = \color{blue}\scriptstyle,
  vlines = 5 ,
  matrix/columns-type = r ,
  no-cell-nodes % only for speedup
}
\setlength{\extrarowheight}{1mm}

\quad $\begin{pNiceMatrix}
12 -8 7 5 3 {} ;
3 -18 12 1 4 ;
-3 -46 29 -2 -15 ;
9 10 -5 4 7
\end{pNiceMatrix}$
...
\end{NiceMatrixBlock}

```



$$\begin{pmatrix} 12 & -8 & 7 & 5 & | & 3 \\ 3 & -18 & 12 & 1 & | & 4 \\ -3 & -46 & 29 & -2 & | & -15 \\ 9 & 10 & -5 & 4 & | & 7 \end{pmatrix}$$

$$\begin{pmatrix} 12 & -8 & 7 & 5 & | & 3 \\ 0 & 64 & -41 & 1 & | & 19 \\ 0 & -192 & 123 & -3 & | & -57 \\ 0 & -64 & 41 & -1 & | & -19 \end{pmatrix}
 \begin{array}{l} L_2 \leftarrow L_1 - 4L_2 \\ L_3 \leftarrow L_1 + 4L_3 \\ L_4 \leftarrow 3L_1 - 4L_4 \end{array}$$

$$\begin{pmatrix} 12 & -8 & 7 & 5 & | & 3 \\ 0 & 64 & -41 & 1 & | & 19 \\ 0 & 0 & 0 & 0 & | & 0 \end{pmatrix}
 \begin{array}{l} L_3 \leftarrow 3L_2 + L_3 \end{array}$$

$$\begin{pmatrix} 12 & -8 & 7 & 5 & | & 3 \\ 0 & 64 & -41 & 1 & | & 19 \end{pmatrix}$$

If you wish an alignment of the different matrices without the same width for all the columns, you can construct a unique array and place the parenthesis with commands `\SubMatrix` in the `\CodeAfter`. Of course, that array can't be broken by a page break.

```

\setlength{\extrarowheight}{1mm}
\[\begin{NiceMatrix}[r, last-col=6, code-for-last-col = \scriptstyle \color{blue}]
12 & -8 & & 7 & & 5 & & 3 & \\\
3 & -18 & & 12 & & 1 & & 4 & \\\
-3 & -46 & & 29 & & -2 & & -15 & \\\
9 & 10 & & -5 & & 4 & & 7 & \\\[1mm]
12 & -8 & & 7 & & 5 & & 3 & \\\
0 & 64 & & -41 & & 1 & & 19 & L_2 \ \gets \ L_1 - 4L_2 \ \\\
0 & -192 & & 123 & & -3 & & -57 & L_3 \ \gets \ L_1 + 4L_3 \ \\\
0 & -64 & & 41 & & -1 & & -19 & L_4 \ \gets \ 3L_1 - 4L_4 \ \\\[1mm]
12 & -8 & & 7 & & 5 & & 3 & \\\
0 & 64 & & -41 & & 1 & & 19 & \\\
0 & 0 & & 0 & & 0 & & 0 & L_3 \ \gets \ 3L_2 + L_3 \ \\\[1mm]
12 & -8 & & 7 & & 5 & & 3 & \\\
0 & 64 & & -41 & & 1 & & 19 & \\\
\CodeAfter [sub-matrix/vlines=4]
\SubMatrix({1-1}{4-5})

```

```

\SubMatrix({5-1}{8-5})
\SubMatrix({9-1}{11-5})
\SubMatrix({12-1}{13-5})
\end{NiceMatrix}\]

```



$$\begin{pmatrix} 12 & -8 & 7 & 5 & | & 3 \\ 3 & -18 & 12 & 1 & | & 4 \\ -3 & -46 & 29 & -2 & | & -15 \\ 9 & 10 & -5 & 4 & | & 7 \end{pmatrix}$$

$$\begin{pmatrix} 12 & -8 & 7 & 5 & | & 3 \\ 0 & 64 & -41 & 1 & | & 19 \\ 0 & -192 & 123 & -3 & | & -57 \\ 0 & -64 & 41 & -1 & | & -19 \end{pmatrix}
 \begin{array}{l} L_2 \leftarrow L_1 - 4L_2 \\ L_3 \leftarrow L_1 + 4L_3 \\ L_4 \leftarrow 3L_1 - 4L_4 \end{array}$$

$$\begin{pmatrix} 12 & -8 & 7 & 5 & | & 3 \\ 0 & 64 & -41 & 1 & | & 19 \\ 0 & 0 & 0 & 0 & | & 0 \end{pmatrix}
 \begin{array}{l} L_3 \leftarrow 3L_2 + L_3 \end{array}$$

$$\begin{pmatrix} 12 & -8 & 7 & 5 & | & 3 \\ 0 & 64 & -41 & 1 & | & 19 \end{pmatrix}$$

In this tabular, the instructions `\SubMatrix` are executed after the composition of the tabular and, thus, the vertical rules are drawn without adding space between the columns.

In fact, it's possible, with the key `vlines-in-sub-matrix`, to choose a letter in the preamble of the array to specify vertical rules which will be drawn in the `\SubMatrix` only (by adding space between the columns).

```

\setlength{\extrarowheight}{1mm}
\[\begin{NiceArray}
[
  vlines-in-sub-matrix=I,
  last-col,
  code-for-last-col = \scriptstyle \color{blue}
]
{rrrr|l}
12 & -8 & & 7 & & 5 & & 3 & \backslash\backslash
3 & -18 & & 12 & & 1 & & 4 & \backslash\backslash
-3 & -46 & & 29 & & -2 & & -15 & \backslash\backslash
9 & 10 & & -5 & & 4 & & 7 & \backslash\backslash[1mm]
12 & -8 & & 7 & & 5 & & 3 & \backslash\backslash
0 & 64 & & -41 & & 1 & & 19 & L_2 \ \scriptstyle \color{blue} \gets L_1 - 4L_2 \ \backslash\backslash
0 & -192 & & 123 & & -3 & & -57 & L_3 \ \scriptstyle \color{blue} \gets L_1 + 4L_3 \ \backslash\backslash
0 & -64 & & 41 & & -1 & & -19 & L_4 \ \scriptstyle \color{blue} \gets 3L_1 - 4L_4 \ \backslash\backslash[1mm]
12 & -8 & & 7 & & 5 & & 3 & \backslash\backslash
0 & 64 & & -41 & & 1 & & 19 & \backslash\backslash
0 & 0 & & 0 & & 0 & & 0 & L_3 \ \scriptstyle \color{blue} \gets 3L_2 + L_3 \ \backslash\backslash[1mm]
12 & -8 & & 7 & & 5 & & 3 & \backslash\backslash
0 & 64 & & -41 & & 1 & & 19 & \backslash\backslash
\CodeAfter
\SubMatrix({1-1}{4-5})
\SubMatrix({5-1}{8-5})
\SubMatrix({9-1}{11-5})
\SubMatrix({12-1}{13-5})
\end{NiceArray}\]

```



$$\begin{pmatrix} 12 & -8 & 7 & 5 & | & 3 \\ 3 & -18 & 12 & 1 & | & 4 \\ -3 & -46 & 29 & -2 & | & -15 \\ 9 & 10 & -5 & 4 & | & 7 \end{pmatrix}$$

$$\begin{pmatrix} 12 & -8 & 7 & 5 & | & 3 \\ 0 & 64 & -41 & 1 & | & 19 \\ 0 & -192 & 123 & -3 & | & -57 \\ 0 & -64 & 41 & -1 & | & -19 \end{pmatrix} \begin{array}{l} L_2 \leftarrow L_1 - 4L_2 \\ L_3 \leftarrow L_1 + 4L_3 \\ L_4 \leftarrow 3L_1 - 4L_4 \end{array}$$

$$\begin{pmatrix} 12 & -8 & 7 & 5 & | & 3 \\ 0 & 64 & -41 & 1 & | & 19 \\ 0 & 0 & 0 & 0 & | & 0 \\ 0 & 0 & 0 & 0 & | & 0 \end{pmatrix} \begin{array}{l} L_3 \leftarrow 3L_2 + L_3 \end{array}$$

$$\begin{pmatrix} 12 & -8 & 7 & 5 & | & 3 \\ 0 & 64 & -41 & 1 & | & 19 \end{pmatrix}$$

18.10 How to highlight cells of a matrix

In order to highlight a cell of a matrix, it's possible to “draw” that cell with the key `draw` of the command `\Block` (this is one of the uses of a mono-cell block⁸⁸).

```
\begin{pNiceArray}{>{\strut}cccc}[margin, rules/color=blue, no-cell-nodes]
\Block[draw]{a_{11}} & a_{12} & a_{13} & a_{14} \\
a_{21} & \Block[draw]{a_{22}} & a_{23} & a_{24} \\
a_{31} & a_{32} & \Block[draw]{a_{33}} & a_{34} \\
a_{41} & a_{42} & a_{43} & \Block[draw]{a_{44}} \\
\end{pNiceArray}
```



$$\begin{pmatrix} a_{11} & a_{12} & a_{13} & a_{14} \\ a_{21} & a_{22} & a_{23} & a_{24} \\ a_{31} & a_{32} & a_{33} & a_{34} \\ a_{41} & a_{42} & a_{43} & a_{44} \end{pmatrix}$$

We should remark that the rules we have drawn are drawn *after* the construction of the array and thus, they don't spread the cells of the array. We recall that, on the other side, the commands `\hline` and `\Hline`, the specifier “|” and the options `hlines`, `vlines`, `hvlines` and `hvlines-except-borders` spread the cells.⁸⁹

It's possible to color a row with `\rowcolor` in the `code-before` (or with `\rowcolor` in the first cell of the row).

```
\begin{pNiceArray}{>{\strut}cccc}% <-- % mandatory
[margin, extra-margin=2pt, no-cell-nodes]
\rowcolor{red!15}A_{11} & A_{12} & A_{13} & A_{14} \\
A_{21} & \rowcolor{red!15}A_{22} & A_{23} & A_{24} \\
A_{31} & A_{32} & \rowcolor{red!15}A_{33} & A_{34} \\
A_{41} & A_{42} & A_{43} & \rowcolor{red!15}A_{44} \\
\end{pNiceArray}
```



⁸⁸We recall that, if the first mandatory argument of the command `\Block` is left empty, that means that the block is a mono-cell block

⁸⁹For the command `\cline`, see the remark p. 12.

$$\begin{pmatrix} A_{11} & A_{12} & A_{13} & A_{14} \\ A_{21} & A_{22} & A_{23} & A_{24} \\ A_{31} & A_{32} & A_{33} & A_{34} \\ A_{41} & A_{42} & A_{43} & A_{44} \end{pmatrix}$$

However, it's not possible to do a fine tuning. That's why we describe now a method to highlight a row of the matrix.

That example and the following ones require TikZ (by default, `nicematrix` only loads PGF, which is a sub-layer of TikZ) and the TikZ library `fit`.

```
\usepackage{tikz} % in the preamble
\usetikzlibrary{fit}
```

We create a rectangular TikZ node which encompasses the nodes of the second row by using the tools of the TikZ library `fit`. Those nodes are not available by default in the `\CodeBefore` (for efficiency). We have to require their creation with the key `create-cell-nodes` of the keyword `\CodeBefore`.

```
\tikzset{highlight/.style={rectangle,
                           fill=red!15,
                           rounded corners = 0.5 mm,
                           inner sep=1pt,
                           fit=#1}}
```

```

 $\begin{bNiceMatrix}$ 
\CodeBefore [create-cell-nodes]
  \tikz \node [highlight = (2-1) (2-last)] {};
\Body
0 & \Cdots & 0 \\
1 & \Cdots & 1 \\
0 & \Cdots & 0 \\
\end{bNiceMatrix}
```

$$\begin{bmatrix} 0 & \dots & 0 \\ 1 & \dots & 1 \\ 0 & \dots & 0 \end{bmatrix}$$



We consider now the following matrix. If we want to highlight each row of this matrix, we can use the previous technique three times.

```

\begin{pNiceArray}{ccc}[last-col, margin = 2pt]
\CodeBefore [create-cell-nodes]
  \begin{tikzpicture}
  \node [highlight = (1-1) (1-last)] {};
  \node [highlight = (2-1) (2-last)] {};
  \node [highlight = (3-1) (3-last)] {};
  \end{tikzpicture}
\Body
a & a + b & a + b + c & L_1 \\
a & a & a + b & L_2 \\
a & a & a & L_3
\end{pNiceArray}
```

$$\begin{pmatrix} a & a + b & a + b + c \\ a & a & a + b \\ a & a & a \end{pmatrix} \begin{matrix} L_1 \\ L_2 \\ L_3 \end{matrix}$$



The result may seem disappointing. We can improve it by using the “medium nodes” instead of the “normal nodes”.

```

\[\begin{pNiceArray}{ccc}[last-col, margin = 2pt, create-medium-nodes]
\CodeBefore [create-cell-nodes]
  \begin{tikzpicture} [name suffix = -medium]
  \node [highlight = (1-1) (1-last)] {} ;
  \node [highlight = (2-1) (2-last)] {} ;
  \node [highlight = (3-1) (3-last)] {} ;
  \end{tikzpicture}
\Body
a & a + b & a + b + c & L_1 \\
a & a & a + b & L_2 \\
a & a & a & L_3
\end{pNiceArray}\]


```



$$\begin{pmatrix} a & a+b & a+b+c \\ a & a & a+b \\ a & a & a \end{pmatrix} \begin{matrix} L_1 \\ L_2 \\ L_3 \end{matrix}$$

18.11 Utilisation of \SubMatrix in the \CodeBefore

In the following example, we illustrate the mathematical product of two matrices. The whole figure is an environment {NiceArray} and the three pairs of parenthesis have been added with \SubMatrix in the \CodeBefore (since you have put these \SubMatrix in the \CodeBefore — and not the \CodeAfter — the dotted lines specified in the the matrix product C will be limited to that matrix).

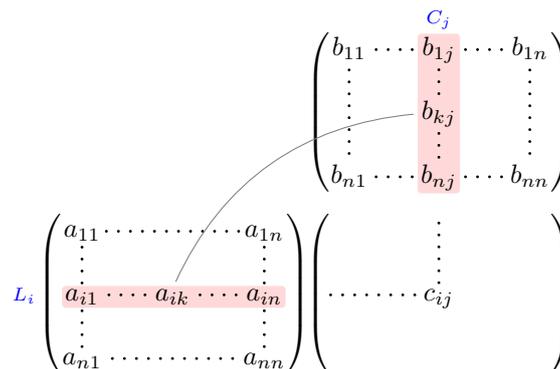

```

\tikzset{highlight/.style={rectangle,
  fill=red!15,
  rounded corners = 0.5 mm,
  inner sep=1pt,
  fit=-#1}}

\[\begin{NiceArray}{*{6}{c}@{\hspace{6mm}}*{5}{c}}[xdots/nullify]
\CodeBefore [create-cell-nodes]
  \SubMatrix({2-7}{6-last})
  \SubMatrix({7-2}{last-6})
  \SubMatrix({7-7}{last-last})
\begin{tikzpicture}
  \node [highlight = (9-2) (9-6)] { } ;
  \node [highlight = (2-9) (6-9)] { } ;
\end{tikzpicture}
\Body
& & & & & & & \color{blue}\scriptstyle C_j \\
& & & & & b_{11} & \cdots & b_{1j} & \cdots & b_{1n} \\
& & & & & \Vdots & & \Vdots & & \Vdots \\
& & & & & & & b_{kj} & & \\
& & & & & & & \Vdots & &
\end{NiceArray}\]

```

```

& & & & & & b_{n1} & \Cdots & b_{nj} & \Cdots & b_{nn} \\[3mm]
& a_{11} & \Cdots & & & a_{1n} \\
& \Vdots & & & & \Vdots & & & \Vdots \\
\color{blue}\scriptstyle L_i
& a_{i1} & \Cdots & a_{ik} & \Cdots & a_{in} & \Cdots & & c_{ij} \\
& \Vdots & & & & \Vdots \\
& a_{n1} & \Cdots & & & a_{nn} \\
\CodeAfter
\tikz \draw [gray,shorten > = 1mm, shorten < = 1mm] (9-4.north) to [bend left] (4-9.west) ;
\end{NiceArray}\}

```



18.12 A triangular tabular

In the following example, we use the style PGF/TikZ `nicematrix/cell-node` to rotate the contents of the cells (and, then, we compensate that rotation by a rotation of the whole tabular with the command `\adjustbox` of the eponymous package, which must be loaded previously).


```

\pgfset
{
  nicematrix/cell-node/.append style =
  { text/rotate = 45, minimum size = 6 mm }
}

\setlength{\tabcolsep}{0pt}

\adjustbox{rotate = -45, set depth = 6mm + 1.414 \arrayrulewidth}
{\begin{NiceTabular} [ hvlines, corners=SE, baseline = line-9 ] { ccccccc }
\CodeBefore
  \chessboardcolors{red!15}{blue!15}
\Body
  1 & 1 & 1 & 1 & 1 & 1 & 1 & 1 \\
  1 & 2 & 3 & 4 & 5 & 6 & 7 \\
  1 & 3 & 6 & 10 & 15 & 21 \\
  1 & 4 & 10 & 20 & 35 \\
  1 & 5 & 15 & 35 \\
  1 & 6 & 21 \\
  1 & 7 \\
  1
\end{NiceTabular}}

```

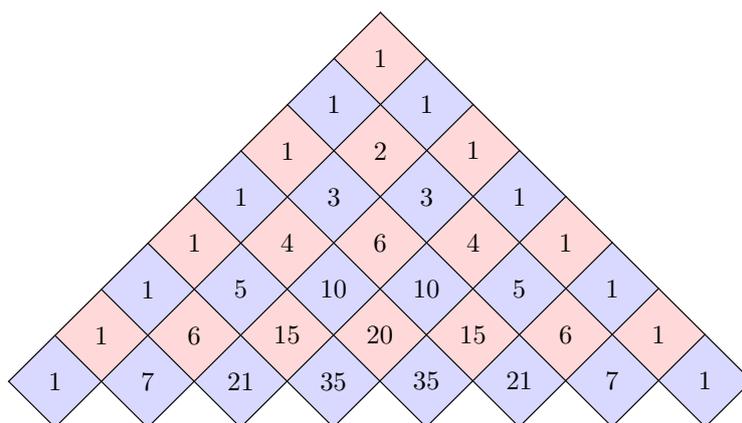

Of course, if you have to draw many diagrams like this one, you should consider using a dedicated package, such as `atableau`.

19 History

The development of the package `nicematrix` is done in the following GitHub depot:
<https://github.com/fpantigny/nicematrix>

The successive versions of the file `nicematrix.sty` provided by TeX Live are also available on the SVN server of TeX Live:

<https://www.tug.org/svn/texlive/trunk/Master/texmf-dist/tex/latex/nicematrix/nicematrix.sty>

Changes between version 7.7 and 7.8

New key `draw-trees-in-col` (and keys `trees/color`, `trees/line-width` and `trees/rounded-corners`)

Changes between version 7.6 and 7.7

New commands `\hdashedline`, `\cdashedline` and the letter `;` ;
New key `notes/no-print` and new command `\NiceTabularNotes`

Changes between version 7.5 and 7.6

New key `create-blocks-in-col`

An “additive syntax” has been added for several keys: `cell-space-limits`, `xdots/brace-shift`, `xdots/shorten`, `notes/code-before`, `code-for-first-row`, etc.

That means that it’s possible to write, for example : `cell-space-limits += 3pt`.

Changes between version 7.4 and 7.5

New key `brace-shift` for the commands `\Hbrace` and `\Vbrace`.

Changes between version 7.3 and 7.4

Negative values are now allowed for the keys `hlines` and `vlines`.

Changes between version 7.2 and 7.3

Simplification of the code by using the latest version of LaTeX : 2025-06-01

Changes between version 7.1 and 7.2

A new key `V` is available in the columns of type `X`.

Changes between version 7.0 and 7.1

New commands `\Hbrace` and `\Vbrace`.

New commands `\EmptyColumn` and `\EmptyRow` in the `\CodeBefore`.

Changes between version 6.29 and 7.0

The package `nicematrix` is now compatible (for the tabulars) with the Tagging Project.

Changes between version 6.28 and 6.29

Modification in order to be compatible with the next version of `array` (v. 2.6g).

Changes between version 6.27 and 6.28

Sub-blocks with the character `&` (when the key `ampersand-in-block` is in force).

Keys `p` and `j` for the command `\Block`.

PGF nodes `i.1`, `i.2`, `i.3`, etc.

Changes between version 6.26 and 6.27

New key `light-syntax-expanded`.

Changes between version 6.25 and 6.26

Special color `nocolor`.

Changes between version 6.24 and 6.25

Correction of several bugs.

An instruction `\rowlistcolors` in the tabular stops the effect of a previous `\rowlistcolors`.

Changes between version 6.23 and 6.24

New command `\TikzEveryCell` available in the `\CodeAfter` and the `\CodeBefore` to apply the same TikZ instruction to all the cells and blocks of the array.

New key `offset` in the key `tikz` of a command `\Block`.

Changes between version 6.22 and 6.23

The specifier “|” in the preambles of the environments has now an optional argument.

Correction of several bugs.

Changes between version 6.21 and 6.22

Key `opacity` for the command `\Block`.

It's now possible to put a label on a “continuous dotted line” with the specifier “:”.

Changes between version 6.20a and 6.21

Key `c` for the command `\tabularnote`.

New commands `\rowcolors` and `\rowlistcolors` available in the array itself (previously, there were only two commands `\rowcolors` and `\rowlistcolors` available in the `\CodeBefore`).

Changes between version 6.20 and 6.20a

The value of the key `name` of an environment of `nicematrix` is expanded (in the TeX sens).

The labels of the tabular notes (created by the command `\tabularnote`) are now composed in an overlapping position *only* when the horizontal alignment mode of the column is `c` or `r`.

Changes between version 6.19 and 6.20

New key `xdots/horizontal-labels`.

Changes between version 6.18 and 6.19

The command `\tabularnote` now supports an optional argument (between square brackets) to change the symbol of the reference of the note.

Changes between version 6.17 and 6.18

New key `opacity` in the commands to color cells, rows and columns.
New key `rounded-corners` for a whole tabular.

Changes between version 6.16 and 6.17

New PGF/TikZ style `nicematrix/cell-node`.
New key `pgf-node-code`

Changes between version 6.15 and 6.16

It's now possible to put any LaTeX extensible delimiter (`\lgroup`, `\langle`, etc.) in the preamble of an environment with preamble (such as `{NiceArray}`) by prefixing them by `\left` and `\right`.
New key `code` for the command `\SubMatrix` in the `\CodeAfter`.

Changes between version 6.14 and 6.15

New key `transparent` for the command `\Block` (with that key, the rules are drawn within the block).

Changes between version 6.13 and 6.14

New keys for the command `\Block` for the vertical position of the content of that block.

Changes between version 6.12 and 6.13

New environment `{TabularNote}` in `{NiceTabular}` with the same semantic as the key `tabularnote` (for legibility).
The command `\Hline` now accepts options (between square brackets).

Changes between version 6.11 and 6.12

New keys `caption`, `short-caption` and `label` in the environment `{NiceTabular}`.
In `{NiceTabular}`, a caption specified by the key `caption` is wrapped to the width of the tabular.
Correction of a bug: it's now possible to use `\OverBrace` and `\UnderBrace` with `unicode-math` (with XeLaTeX or LuaLaTeX).

Changes between version 6.10 and 6.11

New key `matrix/columns-type` to specify the type of columns of the matrices.
New key `ccommand` in `custom-line` and new command `\cdottedline`.

Changes between version 6.9 and 6.10

New keys `xdots/shorten-start` and `xdots/shorten-end`.
It's possible to use `\line` in the `\CodeAfter` between two blocks (and not only two cells).

Changes between version 6.8 and 6.9

New keys `xdots/radius` and `xdots/inter` for customisation of the continuous dotted lines.
New command `\ShowCellNames` available in the `\CodeBefore` and in the `\CodeAfter`.

Changes between version 6.7 and 6.8

In the notes of a tabular (with the command `\tabularnote`), the duplicates are now detected: when several commands `\tabularnote` are used with the same argument, only one note is created at the end of the tabular (but all the labels are present, of course).

Changes between version 6.6 and 6.7

Key `color` for `\OverBrace` and `\UnderBrace` in the `\CodeAfter`
Key `tikz` in the key borders of a command `\Block`

Changes between version 6.5 and 6.6

Keys `tikz` and `width` in `custom-line`.

Changes between versions 6.4 and 6.5

Key `custom-line` in `\NiceMatrixOptions`.
Key `respect-arraystretch`.

Changes between versions 6.3 and 6.4

New commands `\UnderBrace` and `\OverBrace` in the `\CodeAfter`.
Correction of a bug of the key `baseline` (cf. question 623258 on TeX StackExchange).
Correction of a bug with the columns `V` of `varwidth`.
Correction of a bug: the use of `\hdottedline` and `:` in the preamble of the array (or another letter specified by `letter-for-dotted-lines`) was incompatible with the key `xdots/line-style`.

Changes between versions 6.2 and 6.3

Keys `nb-rows`, `rowcolor` and `bold` for the command `\RowStyle`
Key `name` for the command `\Block`.
Support for the columns `V` of `varwidth`.

Changes between versions 6.1 and 6.2

Better compatibility with the classes `revtex4-1` (deprecated) and `revtex4-2`.
Key `vlines-in-sub-matrix`.

Changes between versions 6.0 and 6.1

Better computation of the widths of the `X` columns.
Key `\color` for the command `\RowStyle`.

Index

Symbols

&-in-blocks, 10

A

ampersand-in-blocks, 10

`\arraycolor` (command of `\CodeBefore`), 20

`\arrayrulecolor`, 13

`\arrayrulewidth`, 13

auto-columns-width

(clé de `{NiceMatrixBlock}`), 73

(key of `{NiceMatrixBlock}`), 28

`\AutoNiceMatrix`, 55

B

baseline (key for an environment), 3

`\BAutoNiceMatrix`, 55

`\bAutoNiceMatrix`, 55

`blkarray` (package), 39

`\Block`, 4

Blocks in the tabulars, 4–11

`\Body`, *see* `\CodeBefore`

bold (key of `\RowStyle`), 27

`booktabs` (package), 12

borders (key of `\Block`), 5

bottomrule (subkey of “notes”), 48

brace (nicematrix/brace is a TikZ style
used by `\Hbrace` et `\Vbrace`), 38

brace-shift (key of `\Hbrace` and `\Vbrace`), 38

C

Captions of the tabulars, 46

caption (key of `{NiceTabular}`), 46

caption-above, 46

`ccommand` (key of “custom-line”), 16

`\Cdots`, 32

`\cdottedline`, 19

cell-space-bottom-limit, 2, 27

cell-space-limits, 2, 27

cell-space-top-limit, 2, 27

`\cellcolor`

command in tabular, 25

command of `\CodeBefore`, 20

`cellspace` (package), 2

`\chessboardcolors`

(commande du `\CodeBefore`), 20, 79

`\cline` (LaTeX command), 12

code (key of `\SubMatrix`), 42

code-after, 40

code-before

key for an environment, 20

subkey of “notes”, 48

code-for-first-col, 31

code-for-first-row, 31, 54, 70

code-for-last-col, 31, 54, 70

code-for-last-row, 31, 54

`\CodeAfter`, 40–46, 78

`\CodeBefore... \Body`, 20, 77–79

color

for the delimiters of the matrices, 56

key for dotted rules, 36

key of `\Block`, 5

key of `\OverBrace` and `\UnderBrace`, 44

key of `\RowStyle`, 27

key of “custom-line”, 17

`colortbl` (package), 20

Colour

of the cells, 20

of the delimiters of the matrices, 56

of the rules, 13

`cols` (key of `\rowcolors` of `\CodeBefore`), 22

`\columncolor`

command in the preamble of an environment,
25

command of `\CodeBefore`, 20, 67

columns-type (key of `{NiceMatrix}`, etc.), 53

columns-width, 27

command (key of “custom-line”), 16

corners (key of an environment), 15, 24

Corners (rounded —)

for a block, 5

for a tabular, 52

Corners (the empty —), 15, 79

`create-blocks-in-col`, 11

`create-cell-nodes` (key of `\CodeBefore`), 60, 77,
78

`create-extra-nodes`, 59

`create-large-nodes`, 59

`create-medium-nodes`, 59, 77

`\crossbox` (defined in an example), 62

custom-line, 16–19

D

`\Ddots`, 32, 63, 69

`\definecolorseries` (command of `xcolor`), 23

delimiters

—/color for an environment, 56

—/color pour `\SubMatrix`, 42

—/max-width, 73

delimiters in the preambles, 39

detect-duplicates (subkey of “notes”), 48

`\diagbox`, 16

Dotted lines, 32–39, 69

dotted (key of “custom-line”), 19

draw (key of `\Block`), 5, 76

draw-trees-in-col, 51

E

empty (key of `\TikzEveryCell`), 45

`\EmptyColumn` (command of `\CodeBefore`), 25
`\EmptyRow` (command of `\CodeBefore`), 25
end (key for the rules), 19
end-of-row (to be used with `light-syntax`), 56
enumitem (package required to use
`\tabularnote`), 47, 66
enumitem-keys (subkey of “notes”), 48, 66
enumitem-keys-para (subkey of “notes”), 48
exterior-arraycolsep, 64
extra-height (key of `\SubMatrix`), 42
extra-left-margin, 59
extra-right-margin, 59

F

fill
key of `\Block`, 5
key of `\RowStyle`, 27
first-col, 30
first-row, 30, 54
footnote (package), 46
footnote (key), 46
footnotehyper (package), 46
footnotehyper (key), 46

H

`\Hbrace`, 38
`\Hdotsfor`, 34
`\hdottedline`, 19
highlight (TikZ style defined in
an example), 77
`\Hline`, 13
hlines, *see* Rules
key for an environment, 14
key of `\Block`, 5
key of `\SubMatrix`, 42
horizontal-label(s) (key for dotted rules), 36
`\Hspace`, 33
hvlines, *see* Rules
key for an environment, 14
key of `\Block`, 5
key of `\SubMatrix`, 42
hvlines-except-borders, 14, 68

I

`\Iddots`, 32, 63
Incompatibilities, 65
inter (key for dotted rules), 36
iRow (LaTeX counter), 55

J

jCol (LaTeX counter), 55

L

label (key of `{NiceTabular}`), 46
label-in-list (subkey of “notes”), 48
label-in-tabular (subkey of “notes”), 48
last-col, 30, 54, 70
last-row, 30, 54
`\Ldots`, 32

`\left` : used by `nicematrix` for
delimiters in the preambles, 39
left-margin, 59
left-shorten (key of `\OverBrace` and
`\UnderBrace`), 44
left-xshift (key of `\SubMatrix`), 42
letter (key of “custom-line”), 16
light-syntax, 56
light-syntax-expanded, 56
`\line` (command of `\CodeAfter`), 41
line-style (key for dotted rules), 36
line-style (key for the dotted rules), 70
Lines in the tabulars, *see* Rules

M

mathdots (package), 32
max-width (subkey of “delimiters”), 73
multiplicity (key of “custom-line”), 17

N

name
key for an environment, 57
key of `\Block`, 6
key of `\SubMatrix`, 61
nb-rows (key of `\RowStyle`), 27
`{NiceArrayWithDelims}`, 56
`{NiceMatrixBlock}`, 28, 72
`\NiceMatrixOptions`, 1
`\NiceTabularNotes`, 51
`{NiceTabularX}`, 29
no-cell-nodes, 57
no-print (subkey of “notes”), 48
nocolor, 26
Nodes of PGF/TikZ, 57–62
non empty (key of `\TikzEveryCell`), 45
Notes in the tabulars, 46–51, 66
`\NotEmpty`, 64
notes (key to customize the notes of a
tabular), 66
nullify (key for dotted rules), 36
nullify-dots, 33

O

`\OnlyMainNiceMatrix`, 57
opacity
key of `\Block`, 5
key of `\RowStyle`, 27
key of commands such as
`\rowcolor`, etc., 21
`\OverBrace` (command of `\CodeAfter`
and `\CodeBefore`), 44

P

para (subkey of “notes”), 48
parallelize-diags, 63
`\pAutoNiceMatrix`, 55
pgf-node-code, 58, 79

R

radius (key for dotted rules), 36

`\rectanglecolor` (in `\CodeBefore`), 20
renew-dots, 35
renew-matrix, 35
`\resetcolorseries` (command of `xcolor`), 23
respect-arraystretch (key of `\Block`), 6
respect-blocks (key of `\rowcolors` du
`\CodeBefore`), 22
restart (key of `\rowcolors` of `\CodeBefore`), 22
`\right` : used by `nicematrix` for
delimiters in the preambles, 39
right-margin, 59
right-shorten (key of `\OverBrace` and
`\UnderBrace`), 44
right-xshift (key of `\SubMatrix`), 42
`\rotate`, 25, 27, 54
rounded-corners
key of `\Block`, 5
key of `\RowStyle`, 27
key of `{NiceTabular}`, 52
`\rowcolor`
command in `tabular`, 25, 76
command of `\CodeBefore`, 20, 68
rowcolor (key of `\RowStyle`), 27
`\rowcolors` (command of `\CodeBefore`), 20
`\rowlistcolors` (command of `\CodeBefore`), 20
`\RowStyle`, 27
Rules in the tabulars, 11–19
rules (key for an environment), 13, 68
rules/width (key of `\Block`), 5

S

S (the columns S of `siunitx`), 25, 53
sep-color (key of “custom-line”), 17
short-caption, 46
shorten (key for dotted rules), 36
shorten-end (key for dotted rules), 36
shorten-start (key for dotted rules), 36
`\ShowCellNames` (command of `\CodeAfter`
and `\CodeBefore`), 53
siunitx (package), 53
slim (key of `\SubMatrix`), 42
small (key for an environment), 54
`{smallmatrix}` (environment of `amsmath`), 54
standard-cline, 12
start (key for the rules), 19
style (subkey of “notes”), 48, 66
sub-matrix (key of `\CodeAfter`, with subkeys), 40
`\SubMatrix` (command of `\CodeAfter`
and `\CodeBefore`), 41, 61, 74, 78

T

`\tabularnote`, 46, 66
`{TabularNote}`, 47
tabularnote (key of `{NiceTabular}`), 47
tabularx (package), 29
Tagging Project, 65
tcolorbox (package), 68
tikz-braces (key at load-tome of `nicematrix`), 38
TikZ (utilisation with `nicematrix`), 57

`\TikzEveryCell` (command of `\CodeAfter`
and `\CodeBefore`), 45

tikz
key of `\Block`, 5, 67
key of “borders” de `\Block`, 5, 69
key of “custom-line”, 18
total-width (key of “custom-line”), 18
transparent (key of `\Block`), 6, 67
trees (plusieurs sous-clés), 51

U

`\UnderBrace` (command of `\CodeAfter`
and `\CodeBefore`), 44

V

V (the columns V of `varwidth`), 28, 58
v-center (key of `\Block`), 9
varwidth (package), 28, 58
`\VAutoNiceMatrix`, 55
`\vAutoNiceMatrix`, 55
`\Vbrace`, 38
`\Vdots`, 32
`\Vdotsfor`, 34
vlines, *see* Rules
key for an environment, 14
key of `\Block`, 5
key of `\SubMatrix`, 42
vlines-in-sub-matrix, 75

W

width
key of `{NiceTabular}`, 29
subkey of “rules”, 13
Width of the columns, 27–30

X

X (the columns X), 29
xdots (and its subkeys), 32
xshift (key of `\SubMatrix`), 42

Y

yshift (key of `\OverBrace` and `\UnderBrace`), 44

Contents

1	The environments of this package	2
2	The vertical space between the rows	2
3	The vertical position of the arrays	3
4	The blocks	4
4.1	General case	4
4.2	The mono-column blocks	6
4.3	The mono-row blocks	7
4.4	The mono-cell blocks	7
4.5	Horizontal position of the content of the block	7
4.6	Vertical position of the content of the block	9
4.7	<code>\</code> and <code>&</code> in the blocks	10
4.8	The key <code>create-blocks-in-col</code>	11
5	The rules	11
5.1	Some differences with the classical environments	12
5.1.1	The vertical rules	12
5.1.2	The command <code>\cline</code>	12
5.2	The thickness and the color of the rules	13
5.3	The tools of <code>nicematrix</code> for the rules	13
5.3.1	The keys <code>hlines</code> and <code>vlines</code>	14
5.3.2	The keys <code>hvlines</code> and <code>hvlines-except-borders</code>	14
5.3.3	The (empty) corners	15
5.3.4	The command <code>\diagbox</code>	16
5.3.5	Commands for customized rules	16
6	The color of the background of the rows and columns	20
6.1	Use of <code>colortbl</code>	20
6.2	The tools of <code>nicematrix</code> in the <code>\CodeBefore</code>	20
6.3	Color tools to be used inside the <code>tabular</code>	25
6.4	The special color “ <code>nocolor</code> ”	26
7	The command <code>\RowStyle</code>	27
8	The width of the columns	27
8.1	Basic tools	27
8.2	The columns <code>V</code> of <code>varwidth</code>	28
8.3	The columns <code>X</code>	29
9	The exterior rows and columns	30
10	The continuous dotted lines	32
10.1	The option <code>xdots/nullify</code>	33
10.2	The commands <code>\Hdotsfor</code> and <code>\Vdotsfor</code>	34
10.3	How to generate the continuous dotted lines transparently	35
10.4	The labels of the dotted lines	36
10.5	Customisation of the dotted lines	36
10.6	The dotted lines and the rules	38
10.7	The commands <code>\Hbrace</code> and <code>\Vbrace</code>	38
11	Delimiters in the preamble of the environment	39
12	The <code>\CodeAfter</code>	40
12.1	The command <code>\line</code> in the <code>\CodeAfter</code>	41
12.2	The command <code>\SubMatrix</code> in the <code>\CodeAfter</code> (and the <code>\CodeBefore</code>)	41
12.3	The commands <code>\OverBrace</code> and <code>\UnderBrace</code> in the <code>\CodeAfter</code>	44

12.4	The command <code>\TikzEveryCell</code> in the <code>\CodeAfter</code>	45
13	Captions and notes in the tabulars	46
13.1	Caption of a tabular	46
13.2	The footnotes	46
13.3	The notes of tabular	46
13.4	Customisation of the tabular notes	48
14	Other features	51
14.1	Trees	51
14.2	The key <code>rounded-corners</code>	52
14.3	Command <code>\ShowCellNames</code>	53
14.4	Use of the column type <code>S</code> of <code>siunitx</code>	53
14.5	Default column type in <code>{NiceMatrix}</code>	53
14.6	The command <code>\rotate</code>	54
14.7	The option <code>small</code>	54
14.8	The counters <code>iRow</code> and <code>jCol</code>	55
14.9	The key <code>light-syntax</code>	56
14.10	Color of the delimiters	56
14.11	The environment <code>{NiceArrayWithDelims}</code>	56
14.12	The command <code>\OnlyMainNiceMatrix</code>	57
15	Use of TikZ with <code>nicematrix</code>	57
15.1	The nodes corresponding to the contents of the cells	57
15.1.1	The key <code>pgf-node-code</code>	58
15.1.2	The columns <code>V</code> of <code>varwidth</code>	58
15.2	The medium nodes and the large nodes	59
15.3	The nodes which indicate the position of the rules	61
15.4	The nodes corresponding to the command <code>\SubMatrix</code>	61
16	API for the developers	62
17	Technical remarks	63
17.1	Diagonal lines	63
17.2	The empty cells	64
17.3	The option <code>exterior-arraycolsep</code>	64
17.4	Incompatibilities	65
17.5	Compatibility with the Tagging Project of LaTeX	65
18	Examples	66
18.1	Notes in the tabulars	66
18.2	Utilisation of the key <code>'tikz'</code> of the command <code>\Block</code>	67
18.3	Use with <code>tclobox</code>	68
18.4	A sign chart	68
18.5	Use of the key <code>borders</code> of the command <code>\Block</code>	69
18.6	Continuous dotted lines in the matrices	69
18.7	Dotted lines which are no longer dotted	70
18.8	How the illustrate the numbers of rows and columns in a matrix	70
18.9	Stacks of matrices	72
18.10	How to highlight cells of a matrix	76
18.11	Utilisation of <code>\SubMatrix</code> in the <code>\CodeBefore</code>	78
18.12	A triangular tabular	79
19	History	80
	Index	84